

LINEAR MOTION GUIDE

Linear Motion Guide

Contents





1	Linear Motion Guide	
	1. Features.....	2
	2. Strengths.....	2
	3. Types.....	3
2	Selection of Linear Motion Guide	
	1. Overview.....	4
	2. Procedure.....	4
3	Life Calculation	
	1. Load rating and life.....	5
	2. Load calculation.....	6
	3. Service condition setting.....	6
	4. Load calculation formula.....	7
	5. Equivalent load calculation.....	11
	6. Equivalent load calculation formula.....	11
	7. Static safety factor calculation.....	12
	8. Mean load calculation.....	13
	9. Rating life calculation.....	14
4	Rigidity & Preload	
	1. Preload.....	16
	2. Radial clearance.....	17
5	Friction	
	1. Friction.....	19
	2. Friction coefficient.....	19
6	Precision	
	1. Precision specification.....	20
	2. Precision design.....	20
	3. Dimension tolerance and difference.....	20
	4. Selection of precision class.....	24
7	Lubrication	
	1. Purpose.....	26
	2. Selection of lubricant.....	26
	3. Grease lubrication.....	26
	4. Oil lubrication.....	27
8	Surface Treatment	
	1. Surface Treatment.....	28
	2. Types of surface treatment.....	28
9	Dust Proof	
	1. Dust proof.....	28
	2. Types of dust proof.....	28
10	Measures for Use in Special Environments	29
11	Placement & Installation	
	1. Placement and structure.....	30
	2. Mounting and fixing.....	31
	3. Design of the mounting surface for installation.....	32
	4. Tolerance of the mounting side for installation.....	35
	5. Description of the datum plane for installation.....	38
	6. Rail connection.....	39
	7. Installation.....	40
	8. Torque used for fastening bolts in assembly.....	44
	9. Bolt fastening direction by linear motion guide type.....	45
12	Types of Linear Motion Guide	
	1. Linear Motion Guide H Series.....	46
	2. Spacer Chain Linear Motion Guide H...S Series.....	46
	3. Wide Linear Motion Guide HB Series.....	58
	4. Slim Linear Motion Guide S...Series.....	64
	5. Slim Spacer Chain Linear Motion Guide S...S Series.....	64
	6. Slim Linear Motion Guide HS/HS...S Series.....	76
	7. Miniature Linear Motion Guide M Series.....	82
	8. Wide Miniature Linear Motion Guide MB Series.....	82
	9. Roller Linear Motion Guide R Series.....	90
13	Options	
	1. Seal and rail cap.....	100
	2. Oil inlet.....	104
	3. Grease nipple.....	105
	4. Connection of oil pipes.....	106
	5. How to install Linear Motion Guide using a support rail.....	107
14	Precautions for Handling Linear Motion Guide	
	1. Handling.....	108
	2. Lubrication.....	108
	3. Caution for use.....	108
	4. Storage.....	108

Appendix





Contents

1	Conversion Table from International System of Units (SI)	318
2	N-kgf Conversion Table	320
3	kg-lb Conversion Table	321
4	Hardness Conversion Table	322
5	Dimensional Tolerance of Shaft	324
6	Dimensional Tolerance of Housing Hole	326
7	Usage Example of Linear Motion Guide	328
8	Usage Example of Crossed Roller Bearing	336



Linear Motion Guide - H series




Spacer Chain Guide - H...S series




Wide Linear Motion Guide - HB series




Slim Linear Motion Guide - S series

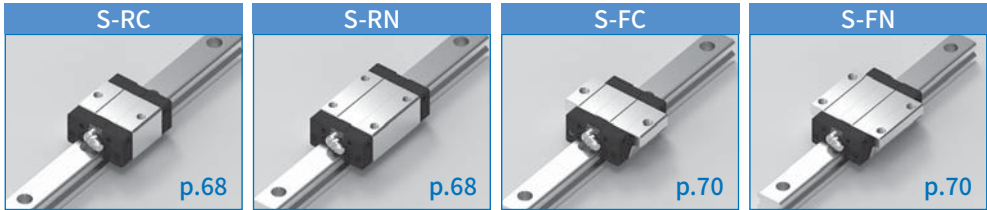


Slim Spacer Chain Guide - S...S series

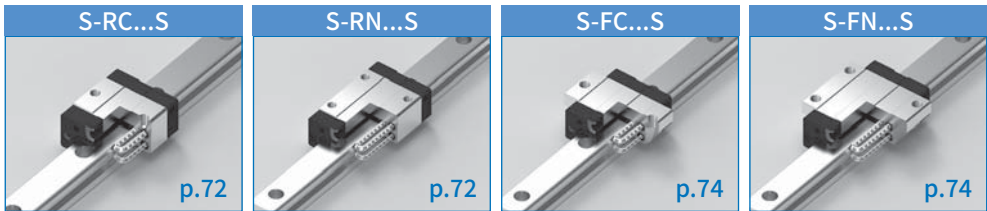



Slim Linear Motion Guide - HS series

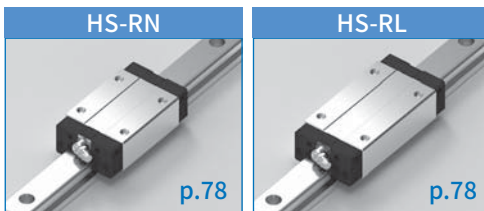



Slim Spacer Chain Guide - HS...S series

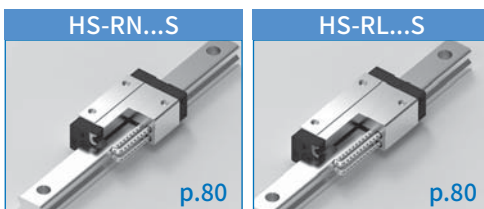





Miniature Linear Motion Guide - M series



Miniature Wide Linear Motion Guide - MB series




Roller Linear Motion Roller Guide - R series



Slim Roller Linear Motion Roller Guide - RS series

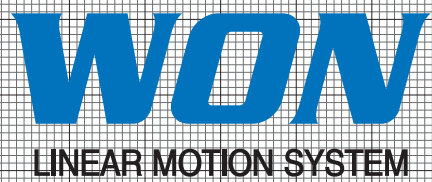

The logo features the word "WON" in a large, bold, blue, italicized sans-serif font. Below it, the words "LINEAR MOTION SYSTEM" are written in a smaller, black, all-caps, sans-serif font. The entire logo is centered on a background of a fine grid.

WON
LINEAR MOTION SYSTEM

1 WON Linear Motion Guide

1. Features

WON Linear Motion Guide is a linear motion bearing with the structure in which rolling elements such as balls or rollers softly circulate the inner part of a block that can make an infinite linear motion along the raceway surface of a rail.

The device is able to do rolling motion ideally, bearing high load and 4-direction equal load with high rigidity. With its auto-adjusting ability, the linear motion guide is excellent at error-absorbing and improves its precision after assembly. Since it has low frictional force and less abrasion, it is possible to maintain precision long and to drive silently at high-speed running.

2. Strengths

1) Able to make precise positioning

Since there is less difference between static friction and kinetic friction as well as in speed-induced friction fluctuation, it excellently responds even to micro-migration, allowing precise positioning and high-speed running.

2) Able to maintain stable precision for a long time

Less friction coefficient and wear due to ideal rolling motion makes it possible to maintain stable precision for a long time.

3) Able to eliminate clearance or increase rigidity by preloading


It is possible to eliminate clearance by using rolling elements such as a ball or a roller, or to increase rigidity of Linear Motion Guide by preloading.

4) Simple lubrication

Lubrication is simple, and it is convenient to maintain the device with grease or oil.






5) Able to make compact equipment and save the cost for operating electricity

The device is able to bear high load with high rigidity and has low friction. Therefore, it is possible to design compact and miniaturized equipment and to save manufacturing costs and energy.

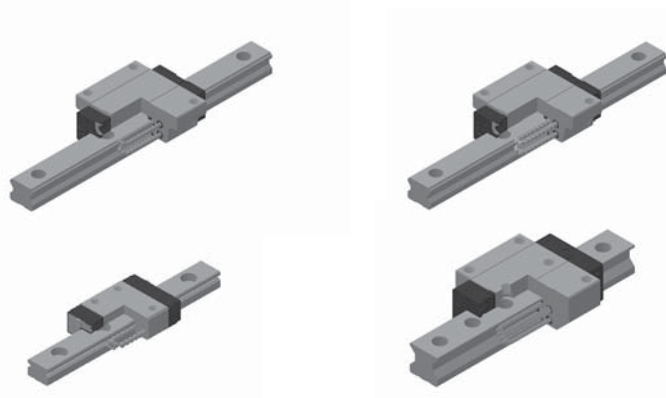

3. Types

WON ST offers various types of linear motion guide from miniature types to general ball linear motion guide to low-noise linear motion guide to ultra-high rigid roller linear motion guide. Since each one supports different shapes and sizes according to service conditions, you can select the optimal linear motion guide suitable for each usage.







<p>Linear Motion Guide</p>		<ul style="list-style-type: none"> • World standard ball linear motion guide • 4-direction equal load type with 45° contact angle • Great error-absorbing ability with D/F combination • Linear motion with high rigidity and high precision through ideal rolling motion
<p>Wide Linear Motion Guide</p>		<ul style="list-style-type: none"> • 4-direction equal load type with 45° contact angle; a low-centered structure with a wide and short rail; the moment working at a narrow space; usable as an one-axis type where high rigidity is required; a device with linear motion
<p>Spacer Chain Linear Motion Guide</p>		<ul style="list-style-type: none"> • World standard ball linear motion guide • 4-direction equal load type with 45° contact angle • Great error-absorbing ability with D/F combination • A spacer ball chain based retainer type; a linear motion device generating low noise and low dust
<p>Miniature Linear Motion Guide</p>		<ul style="list-style-type: none"> • Miniature high-rigidity • Various shapes and sizes • A compact linear motion device with high durability and reliability
<p>Roller Linear Motion Guide</p>		<ul style="list-style-type: none"> • Roller-enabled ultra-rigid linear motion guide • 4-direction equal load type with 45° contact angle • Able to run reliably for a long time through rolling motion having the wide contact surface • A linear motion device with high rigidity and high precision, and bearing high load



2 Selection of Linear Motion Guide



1. Overview


To select a linear motion guide, it is necessary to identify the details of requirements, prioritize them, and then choose the one that meets the service conditions.

2. Procedure

- 1 Identify service conditions
 equipment, maintenance structure, installation space, assembly status, functional requirements, service conditions
- 2 Select a type of Linear Motion Guide
 Select an appropriate type by considering motion condition, load level, rigidity, friction, and assembly.
- 3 Select the model number of Linear Motion guide
 Determine a model number and a quantity of blocks by considering such factors as assembly space and load.
- 4 Calculate loads
 Calculate the loads of the vertical and horizontal directions and moment, which are imposed on a block.
- 5 Calculate equivalent load
 Convert each load imposed on a block into an equivalent load.
- 6 Calculate mean load
 Convert each load imposed on a block and the variable load during acceleration or deceleration into a mean load
- 7 Calculate static safety factor
 Calculate a static safety factor identified with basic load rating and max. equivalent load. Check if it fits for service conditions.
- 8 Calculate life
 Calculate a rated load and a life span. Check if the calculated life span fits for service conditions.
- 9 Review preload & clearance
 Select the preload and clearance suitable for service conditions.
- 10 Determine the class of precision
 Determine a class of driving precision required by Linear Motion guide
- 11 Lubrication, dust proof, surface handling
 Select the lubricant suitable for the environment using grease, oil, or special grease lubrication. Select a dustproof seal. Determine the surface treatment for rust prevention for generating low dust.
- 12 Complete selection
 Decide the final specifications of Linear Motion guide.

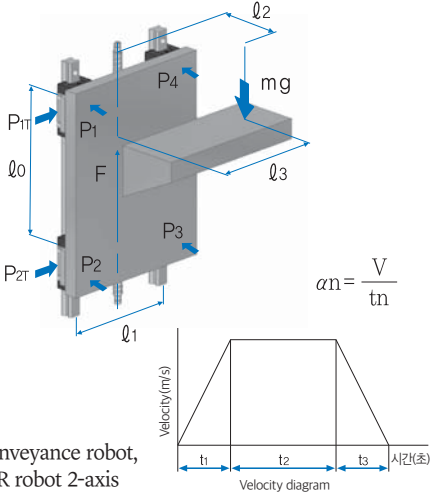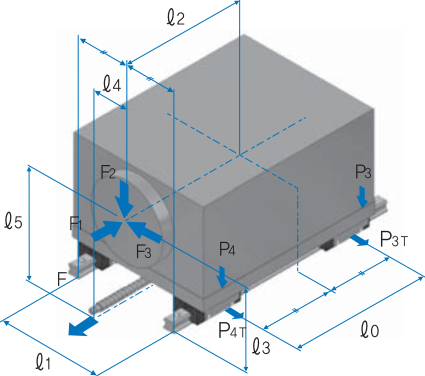Case	Service Conditions	Load Calculation Formula
<p>6</p>	<p>Block move Vertical/moment of inertia</p>  <p>E.g.) Conveyance robot, LTR robot 2-axis</p>	<p>Acceleration</p> $P_1=P_4 = -\frac{m(g-\alpha)\ell_2}{2 \cdot \ell_0}$ $P_2=P_3 = \frac{m(g-\alpha)\ell_2}{2 \cdot \ell_0}$ $P_{1T}=P_{4T} = -\frac{m(g-\alpha)\ell_3}{2 \cdot \ell_0}$ $P_{2T}=P_{3T} = -\frac{m(g-\alpha)\ell_3}{2 \cdot \ell_0}$ <p>Constant Velocity</p> $P_1=P_4 = -\frac{mg \cdot \ell_2}{2 \cdot \ell_0}$ $P_2=P_3 = \frac{mg \cdot \ell_2}{2 \cdot \ell_0}$ $P_{1T}=P_{4T} = -\frac{mg \cdot \ell_3}{2 \cdot \ell_0}$ $P_{2T}=P_{3T} = -\frac{mg \cdot \ell_3}{2 \cdot \ell_0}$ <p>Deceleration</p> $P_1=P_4 = -\frac{m(g-\alpha_3)\ell_2}{2 \cdot \ell_0}$ $P_2=P_3 = \frac{m(g-\alpha_3)\ell_2}{2 \cdot \ell_0}$ $P_{1T}=P_{4T} = -\frac{m(g-\alpha_3)\ell_3}{2 \cdot \ell_0}$ $P_{2T}=P_{3T} = -\frac{m(g-\alpha_3)\ell_3}{2 \cdot \ell_0}$
<p>7</p>	<p>Block move Complex external loads like cutting load</p>  <p>E.g.) Machine tool, CNC lathe, Machining center, NC milling machine</p>	<p>F1 application</p> $P_1=P_4 = -\frac{F_1 \cdot \ell_5}{2 \cdot \ell_0}$ $P_2=P_3 = \frac{F_1 \cdot \ell_5}{2 \cdot \ell_0}$ $P_{1T}=P_{4T} = -\frac{F_1 \cdot \ell_4}{2 \cdot \ell_0}$ $P_{2T}=P_{3T} = -\frac{F_1 \cdot \ell_4}{2 \cdot \ell_0}$ <p>F2 application</p> $P_1=P_4 = \frac{F_2}{4} - \frac{F_2 \cdot \ell_2}{2 \cdot \ell_0}$ $P_2=P_3 = \frac{F_2}{4} + \frac{F_2 \cdot \ell_2}{2 \cdot \ell_0}$ <p>F3 application</p> $P_1=P_4 = -\frac{F_3 \cdot \ell_3}{2 \cdot \ell_1}$ $P_2=P_3 = \frac{F_3 \cdot \ell_3}{2 \cdot \ell_1}$ $P_{1T}=P_{4T} = \frac{F_3}{4} - \frac{F_3 \cdot \ell_2}{2 \cdot \ell_0}$ $P_{2T}=P_{3T} = \frac{F_3}{4} + \frac{F_3 \cdot \ell_2}{2 \cdot \ell_0}$

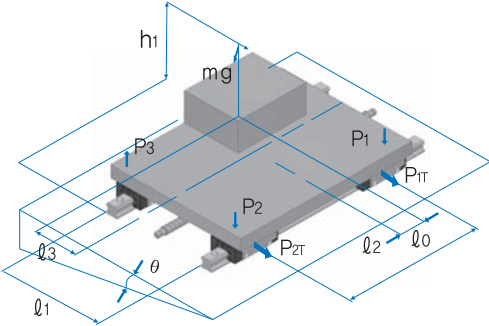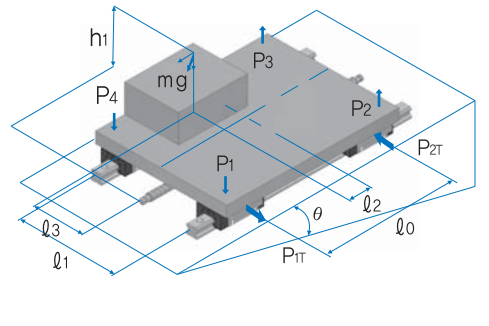Case	Service Conditions	Load Calculation Formula
8	<p>Block move Moment load in case of application to side slope / cutting load</p> 	$P_1 = \frac{mg \cdot \cos \theta}{4} + \frac{mg \cdot \cos \theta \cdot l_2}{2 \cdot l_0} - \frac{mg \cdot \cos \theta \cdot l_3}{2 \cdot l_1} + \frac{mg \cdot \sin \theta \cdot h_1}{2 \cdot l_1}$ $P_{1T} = \frac{mg \cdot \sin \theta}{4} + \frac{mg \cdot \sin \theta \cdot l_2}{2 \cdot l_0}$ $P_2 = \frac{mg \cdot \cos \theta}{4} - \frac{mg \cdot \cos \theta \cdot l_2}{2 \cdot l_0} - \frac{mg \cdot \cos \theta \cdot l_3}{2 \cdot l_1} + \frac{mg \cdot \sin \theta \cdot h_1}{2 \cdot l_1}$ $P_{2T} = \frac{mg \cdot \sin \theta}{4} - \frac{mg \cdot \sin \theta \cdot l_2}{2 \cdot l_0}$ $P_3 = \frac{mg \cdot \cos \theta}{4} - \frac{mg \cdot \cos \theta \cdot l_2}{2 \cdot l_0} + \frac{mg \cdot \cos \theta \cdot l_3}{2 \cdot l_1} - \frac{mg \cdot \sin \theta \cdot h_1}{2 \cdot l_1}$ $P_{3T} = \frac{mg \cdot \sin \theta}{4} + \frac{mg \cdot \sin \theta \cdot l_2}{2 \cdot l_0}$ $P_4 = \frac{mg \cdot \cos \theta}{4} + \frac{mg \cdot \cos \theta \cdot l_2}{2 \cdot l_0} + \frac{mg \cdot \cos \theta \cdot l_3}{2 \cdot l_1} - \frac{mg \cdot \sin \theta \cdot h_1}{2 \cdot l_1}$ $P_{4T} = \frac{mg \cdot \sin \theta}{4} + \frac{mg \cdot \sin \theta \cdot l_2}{2 \cdot l_0}$
9	<p>Block move Moment load in case of application to side slope / cutting load</p>  <p>E.g.) CNC lathe, Tool rest</p>	$P_1 = \frac{mg \cdot \cos \theta}{4} + \frac{mg \cdot \cos \theta \cdot l_2}{2 \cdot l_0} - \frac{mg \cdot \cos \theta \cdot l_3}{2 \cdot l_1} + \frac{mg \cdot \sin \theta \cdot h_1}{2 \cdot l_0}$ $P_{1T} = \frac{mg \cdot \sin \theta \cdot l_3}{2 \cdot l_0}$ $P_2 = \frac{mg \cdot \cos \theta}{4} - \frac{mg \cdot \cos \theta \cdot l_2}{2 \cdot l_0} - \frac{mg \cdot \cos \theta \cdot l_3}{2 \cdot l_1} - \frac{mg \cdot \sin \theta \cdot h_1}{2 \cdot l_0}$ $P_{2T} = -\frac{mg \cdot \sin \theta \cdot l_3}{2 \cdot l_0}$ $P_3 = \frac{mg \cdot \cos \theta}{4} - \frac{mg \cdot \cos \theta \cdot l_2}{2 \cdot l_0} + \frac{mg \cdot \cos \theta \cdot l_3}{2 \cdot l_1} - \frac{mg \cdot \sin \theta \cdot h_1}{2 \cdot l_0}$ $P_{3T} = -\frac{mg \cdot \sin \theta \cdot l_3}{2 \cdot l_0}$ $P_4 = \frac{mg \cdot \cos \theta}{4} + \frac{mg \cdot \cos \theta \cdot l_2}{2 \cdot l_0} + \frac{mg \cdot \cos \theta \cdot l_3}{2 \cdot l_1} + \frac{mg \cdot \sin \theta \cdot h_1}{2 \cdot l_0}$ $P_{4T} = \frac{mg \cdot \sin \theta \cdot l_3}{2 \cdot l_0}$

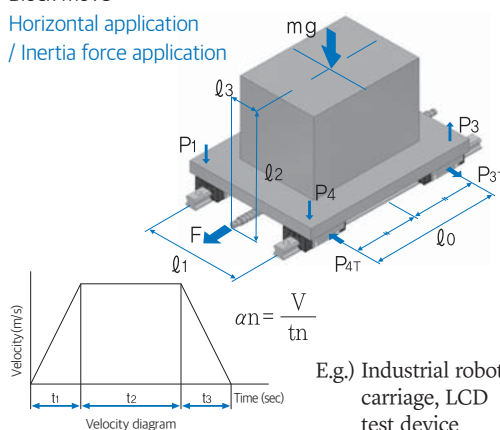Case	Service Conditions	Load Calculation Formula
10	<p>Block move Horizontal application / Inertia force application</p>  <p>E.g.) Industrial robot carriage, LCD test device</p>	<p>Acceleration</p> $P_1=P_4 = \frac{mg}{4} - \frac{m \cdot \alpha \cdot l_2}{2 \cdot l_0}$ $P_2=P_3 = \frac{mg}{4} + \frac{m \cdot \alpha \cdot l_2}{2 \cdot l_0}$ $P_{1T} \sim P_{4T} = \frac{m \cdot \alpha \cdot l_3}{2 \cdot l_0}$ <p>Constant velocity</p> $P_1 \sim P_4 = \frac{mg}{4}$ <p>Deceleration</p> $P_1=P_4 = \frac{mg}{4} + \frac{m \cdot \alpha \cdot l_2}{2 \cdot l_0}$ $P_2=P_3 = \frac{mg}{4} - \frac{m \cdot \alpha \cdot l_2}{2 \cdot l_0}$ $P_{1T} \sim P_{4T} = \frac{m \cdot \alpha \cdot l_3}{2 \cdot l_0}$

5. Equivalent load calculation

There are diverse kinds of load imposed on a block in a linear motion guide, such as compression load in vertical direction, tensile load, horizontal load, and moment load. There is also complex load of them. Sometimes the magnitude and direction of load change. Since it is difficult to calculate the variable load when calculating the life of the linear motion guide, it is required to use the equivalent load converted into the compression load or tensile load in vertical direction in order to calculate the life or static safety factor.

6. Equivalent load calculation formula

If a linear motion guide bears vertical compression load or tensile load or horizontal load simultaneously, or if the magnitude or direction of load changes, an equivalent load is calculated in the following formula.

$$P_E(\text{Equivalent load}) = P_N + P_{NT}$$

P_N : Compression load
 P_{NT} : Horizontal load

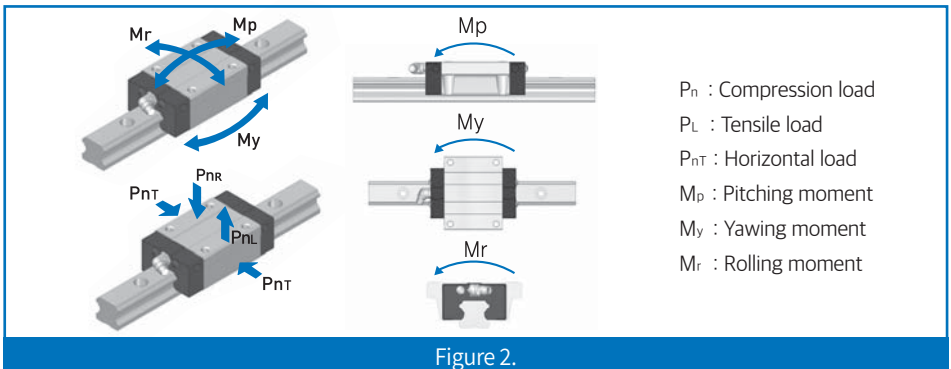


Figure 2.

1) Hardness factor (f_H)

To implement the best performance of a linear motion guide, it is necessary to maintain appropriately the hardness and depth of the raceway surface of the block and rail that contact a rolling element (ball or roller). WON linear motion guide has HRC58-64 surface hardness. There is no need to consider hardness factor. If the hardness is lowered than a baseline, load capacity of a linear motion guide decreases. In this case, it is necessary to apply hardness factor to life calculation.

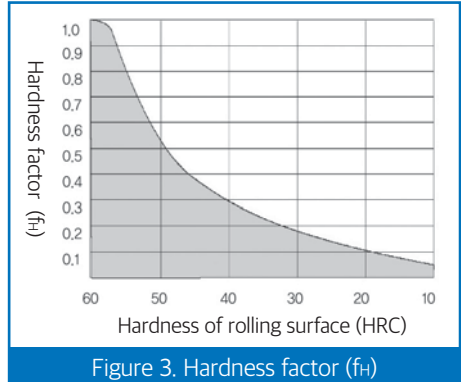


Figure 3. Hardness factor (f_H)

2) Temperature factor (f_T)

If high temperature over 100°C is applied to a linear motion guide, it is necessary to take into account temperature factor (f_T) at the time when a linear motion guide is selected. Please make sure to use WON linear motion guide at below 80°C. At over 80°C, please use a high-temp linear motion guide.

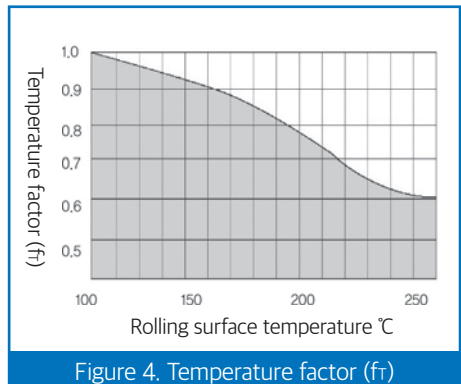


Figure 4. Temperature factor (f_T)

Note) If ambient temperature is over 80°C, it is necessary to use the materials of seal, end plate, and support plate that have specifications for high temperature.

3) Contact factor (f_c)

If over two blocks are closely assembled and mounted, uniform load may not be applied to the blocks due to difference among mounting surfaces. Therefore, it is required to multiply basic static load rating (C) and basic dynamic load rating (C_0) by the contact factor shown in Table 2.

Table 2.

No. of blocks in close contact	Contact factor (f_c)
2	0.81
3	0.72
4	0.66
5	0.61
Over 6	0.6
Common use	1.0

4) Load factor (f_w)

Generally the static load applied to the block of a linear motion guide can be calculated in formula. However, while a machine is running, the load applied to the block tends to come from vibration or impacts. Therefore, as for the vibration or impact load at high-speed running, it is necessary to consider the load factor (f_w) shown in Table 3. Divide the basic dynamic load rating of a linear motion guide by a load factor (f_w).

Table 3

External condition	Service Conditions	Load factor
Low	Smooth running at mild speed; no external vibration or impacts	1.0 ~ 1.3
Moderate	Low speed; moderate external vibration or impacts	1.2 ~ 1.5
High	High speed; strong vibration or impacts	1.5 ~ 2.0
Very high	Very high speed; strong vibration and impacts at running	2.0 ~ 4.0

4 Rigidity and Preload

1. Preload

A linear motion guide is preloaded in a way that it improves mechanical precision by eliminating clearance using the rolling element (ball or roller) inserted into the space between a rail and a block or in a way that it applies load to the rolling element in advance by inserting the rolling element larger than the clearance of the raceway between a rail and a block. This process will enhance the rigidity of the linear motion guide and will lessen the displacement level caused by external load.

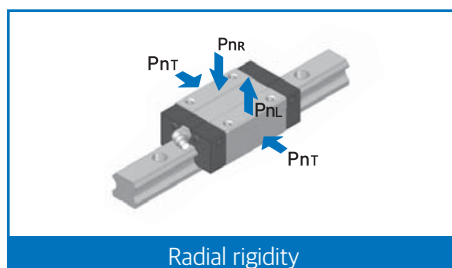
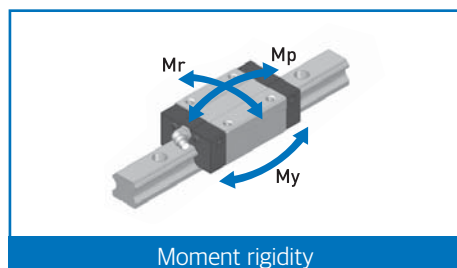
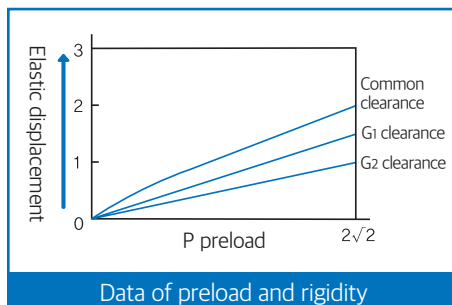
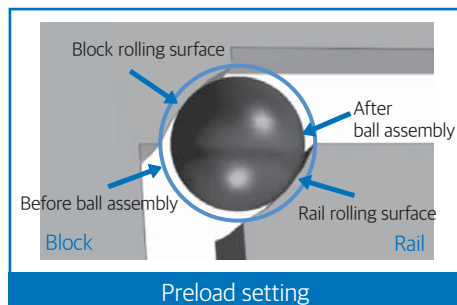


Table 5. Radial clearance of H, S & HS Series

Unit : μm

Model No.			Symbol		
			Moderate	Light preload	Heavy preload
			No symbol	G1	G2
H15	S15	-	-4 ~ +2	-12 ~ -4	-
H20	S20	-	-5 ~ +2	-14 ~ -5	-23 ~ -14
H25	S25	HS25	-6 ~ +3	-16 ~ -6	-26 ~ -16
H30	-	HS30	-7 ~ +4	-19 ~ -7	-31 ~ -19
H35	-	HS35	-8 ~ +4	-22 ~ -8	-35 ~ -22
H45	-	-	-10 ~ +5	-25 ~ -10	-40 ~ -25
H55	-	-	-12 ~ +5	-29 ~ -12	-46 ~ -29

Table 6. Radial clearance of HW Series

Unit : μm

Model No.			Symbol		
			Moderate	Light preload	Heavy preload
			No symbol	G1	G2
HB17			-3 ~ 0	-7 ~ -3	-
HB21			-4 ~ +2	-8 ~ -4	-
HB27			-5 ~ +2	-11 ~ -5	-
HB35			-8 ~ +4	-18 ~ -8	-28 ~ -18

Table 7. Radial clearance of M & MB Series

Unit : μm

Model No.			Symbol	
			Moderate	Light preload
			No symbol	G1
M5	MB5	0 ~ +1.5	-1 ~ 0	
M7	MB7	-2 ~ +2	-3 ~ 0	
M9	MB9	-2 ~ +2	-4 ~ 0	
M12	MB12	-3 ~ +3	-6 ~ 0	
M15	MBT13,MB15	-5 ~ +5	-10 ~ 0	
M20	-	-7 ~ +7	-14 ~ 0	

Table 8. Radial clearance of R Series

Unit : μm

Model No.	Symbol		
	Light preload	Heavy preload	Special preload
	G1	G2	G3
R25	-2 ~ -1	-3 ~ -2	-4 ~ -3
R30	-2 ~ -1	-3 ~ -2	-4 ~ -3
R35	-2 ~ -1	-3 ~ -2	-5 ~ -3

Model No.	Symbol		
	Light preload	Heavy preload	Special preload
	G1	G2	G3
R45	-2 ~ -1	-3 ~ -2	-5 ~ -3
R55	-2 ~ -1	-4 ~ -2	-6 ~ -4
R65	-3 ~ -1	-5 ~ -3	-8 ~ -5

Table 11. Length of rail and parallelism of motion of linear motion guide (H, H...S, HB, S, S...S, HS, HS...S Series) Unit : μm

Length of rail		Parallelism of motion				
Excess	Below	Moderate No symbol	High P6	Precision P5	Super precision P5	Ultra precision P3
-	50	5	3	2	1.5	1
50	80	5	3	2	1.5	1
80	125	5	3	2	1.5	1
125	200	5	3.5	2	1.5	1
200	250	6	4	2.5	1.5	1
250	315	7	4.5	3	1.5	1
315	400	8	5	3.5	2	1.5
400	500	9	6	4.5	2.5	1.5
500	630	11	7	5	3	2
630	800	12	8.5	6	3.5	2
800	1000	13	9	6.5	4	2.5
1000	1250	15	11	7.5	4.5	3
1250	1600	16	12	8	5	4
1600	2000	18	13	8.5	5.5	4.5
2000	2500	20	14	9.5	6	5
2500	3150	21	16	11	6.5	5.5
3150	4000	23	17	12	7.5	6

Table 12. Precision specification of miniature linear motion guide (M, MB Series) Unit : mm

Model No.	Dimension	Precision spec	Moderate	High	Precision
			No symbol	P6	P5
5	Dimensional tolerance of height H		± 0.030	-	± 0.015
	Difference in height H		0.015	-	0.005
	Dimensional tolerance of width W2		± 0.030	-	± 0.015
	Difference in width W2		0.015	-	0.005
	Parallelism of motion of C against A		See Table 13.		
	Parallelism of motion of D against B		See Table 13.		
7	Dimensional tolerance of height H		± 0.040	± 0.020	± 0.010
9	Difference in height H		0.030	0.015	0.007
12	Dimensional tolerance of width W2		± 0.040	± 0.025	± 0.015
13	Difference in width W2		0.030	0.020	0.010
15	Parallelism of motion of C against A		See Table 13.		
20	Parallelism of motion of D against B		See Table 13.		

Table 13. Length of rail and parallelism of motion of miniature linear motion guide (M, MB series) Unit : μm

Length of rail		Parallelism of motion		
Above	Below	Moderate	High	Precision
		No symbol	H P6	P P5
-	40	8	4	1
40	70	10	4	1
70	100	11	4	2
100	130	12	5	2
130	160	13	6	2
160	190	14	7	2
190	220	15	7	3
220	250	16	8	3
250	280	17	8	3
280	310	17	9	3
310	340	18	9	3
340	370	18	10	3
370	400	19	10	3
400	430	20	11	4
430	460	20	12	4
460	490	21	12	4
490	520	21	12	4
520	550	22	12	4
550	580	22	13	4
580	610	22	13	4
610	640	22	13	4
640	670	23	13	4
670	700	23	13	5
700	730	23	14	5
730	760	23	14	5
760	790	23	14	5
790	820	23	14	5

Length of rail		Parallelism of motion		
Above	Below	Moderate	High	Precision
		No symbol	H P6	P P5
820	850	24	14	5
850	880	24	14	5
880	910	24	14	5
910	940	24	14	5
940	970	24	14	5
970	1000	25	14	5
1000	1030	25	16	5
1030	1060	25	16	5
1060	1090	25	16	6
1090	1120	25	16	6
1120	1150	25	16	6
1150	1180	25	17	6
1180	1210	26	17	6
1210	1240	26	17	6
1240	1270	26	17	6
1270	1300	26	17	6
1300	1330	26	17	6
1330	1360	27	17	6
1360	1390	27	18	6
1390	1420	27	18	6
1420	1450	27	18	7
1450	1480	27	18	7
1480	1510	27	18	7
1510	1540	28	19	7
1540	1570	28	19	7
1570	1800	28	19	7

Table 14. Specifications for precision of linear motion guide (R series)

Dimension	High	Precision	Super precision	Ultra precision
	H	P	SP	UP
	P6	P5	P4	P3
Dimensional tolerance of height H	±0.042	±0.020	±0.010	±0.008
Difference in height H	0.015	0.007	0.005	0.003
Dimensional tolerance of width W ₂	±0.050	±0.025	±0.015	±0.010
Difference in width W ₂	0.020	0.010	0.007	0.003
Parallelism of motion of C against A	See Table 15.			
Parallelism of motion of D against B	See Table 15.			

Table 15. Length of rail and parallelism of motion of linear motion guide (R series)

Unit : μm

Length of rail		Parallelism of motion			
Above	Below	High	Precision	Super precision	Ultra precision
		P6	P5	P4	P3
—	50	3	2	1,5	1
50	80	3	2	1,5	1
80	125	3	2	1,5	1
125	200	3,5	2	1,5	1
200	250	4	2,5	1,5	1
250	315	4,5	3	1,5	1
315	400	5	3,5	2	1,5
400	500	6	4,5	2,5	1,5
500	630	7	5	3	2
630	800	8,5	6	3,5	2
800	1000	9	6,5	4	2,5
1000	1250	11	7,5	4,5	3
1250	1600	12	8	5	4
1600	2000	13	8,5	5,5	4,5
2000	2500	14	9,5	6	5
2500	3150	16	11	6,5	5,5
3150	4000	17	12	7,5	6

4. Selection of precision class

Table 16. For the selection of precision class of linear motion guide by unit, please refer to the table shown below.

Application	Unit	Precision class					Preload		
		Preload type	High	Precision	Super precision	Ultra precision	Preload type	Light preload	Heavy preload
		No symbol	H	P	SP	UP	No symbol	G1	G2
		P6	P5	P4	P3				
Machine Tool	CNC Lathe		●	●	●				●
	Machining center		●	●	●				●
	NC milling machine			●	●				●
	CNC tapping machine		●	●	●				●
	NC boring machine		●	●	●				●
	NC drilling machine		●	●	●				●
	3D engraving machine		●	●	●				●
	Jig boring machine		●	●	●				●
	EDM electric spark machine			●	●	●		●	●
Grinding machine			●	●	●			●	
Semiconductor equipment	Prober equipment					●		●	●
	Wire bonder				●	●		●	●
	Slicing machine				●	●		●	
	Dicing machine				●	●		●	
	IC test handler			●	●			●	
	PCB laser via-hole driller				●			●	
	PCB inspection equipment			●	●			●	
	Laser marker			●				●	
Chip moulder			●	●			●		
FPD	Mac/Mic inspection equipment				●	●		●	
	Phantom inspection equipment				●	●		●	
	Exposure				●	●		●	
	Laser repair			●	●	●		●	
	Lighting inspection equipment		●	●				●	
	Coater machine			●	●			●	
	Chip bonding machine		●	●				●	
	Dispenser machine		●	●				●	

Application	Unit	Precision class					Preload		
		Preload type	High	Precision	Super precision	Ultra precision	Preload type	Light preload	Heavy preload
		No symbol	H P6	P P5	SP P4	UP P3	No symbol	G1	G2
F P D	Scriber		●	●				●	
	Glass edge grinding machine		●	●				●	
	FPD measuring test equipment			●	●			●	
	Laminating equipment		●	●				●	
	Indentation test equipment								
	Prober equipment								
Industrial machine	Punching press		●					●	
	Tire molder	●						●	
	Tire vulcanizer	●						●	
	Auto-shearing machine	●						●	
	Auto-welding machine	●					●	●	
	Conveyor	●					●		
	Textile machine	●					●		
	Injection molding machine	●					●	●	
Industrial robot	Cartesian coordinated robot	●	●	●				●	
	Gantry robot	●	●					●	
	LTR robot		●	●				●	
	Take-out robot	●						●	
	Cylindrical coordinated robot		●					●	
	Vacuum robot		●	●				●	
	Robot carriage	●							
	Linear actuator		●	●	●		●	●	
Others	Office machine	●					●		
	FA transport equipment	●					●		
	Medical equipment	●					●	●	
	Welding machine	●					●		
	Painting machine	●					●		
	Precision XY table		●	●	●			●	
	UVW stage		●	●				●	
	3D measuring machine			●	●	●		●	

7 Lubrication

1. Purpose

The purpose of lubricating a linear motion guide is to create an oil surface between the raceway surface of rail and block and a rolling element so as to avoid the direct contact of metals, and thereby to reduce friction, wear and heat, preventing the raceway surface and the rolling element from being overheated and melted to be adhered to each other. Moreover, the oil surface created between the raceway surface and a ball decreases load-induced contact stress, so that it can improve the rolling contact fatigue life and prevent rust. A linear motion guide is equipped with a seal. Nevertheless, grease inside the block oozes while the device is in operation. For this reason, it is required to supply a lubricant at a time and interval appropriate to each service condition.

2. Selection of lubricant

To achieve the best performance of a linear motion guide, it is necessary to select the lubricant suitable for service conditions. Lubricants used for a linear motion guide include grease and oil. It is possible to select an appropriate lubricant and lubrication method depending on service conditions, load, operating speed, assembly type, etc.

3. Grease lubrication

Grease is a semisolid lubricant that consists of base oil, thickener, and additives.

Generally, when a linear motion guide is lubricated with grease, lithium soap grease is used. In the condition of high load or the condition of use, the grease mixed with extreme-pressure additive is used. To apply a linear motion guide to a high-vacuum environment or a cleanroom, it is desirable to select a type of grease excellent at low evaporation and low dust generation.

1) Grease refilling

For grease refilling in a linear motion guide, it is necessary to supply a sufficient amount of grease with the use of a grease nipple until remaining grease is discharged. It is appropriate to fill up 50% or so volume block with grease. After refilling, rolling resistance can be increased. In order to reduce the rolling resistance, it is better to take a test run about 20 times prior to the operation.

2) Refill interval

If a travel of linear motion guide exceeds a certain time, its lubricating performance declines. So it is required to supply an appropriate amount of grease at a proper time depending on service conditions and environment. Usually, it is necessary to supply grease when travel of the device distance reaches 100km.

$$T = \frac{100 \times 6000}{V_e \times 60} \text{ hr}$$

T : Oil refilling cycle (time)
V_e : Velocity (m/min)

8 Surface Treatment

1. Surface treatment

WON ST uses the following methods for the optimal surface treatment of a linear motion guide in order to prevent rust and improve the quality of its appearance.

2. Types of surface treatment

1) Electrolytic rust-preventive black coating (black Cr plating)

This is an industrial black chrome coating type that is used to improve the corrosion proof at low cost. It can achieve better corrosion proof than martensite stainless steel and be used to enhance appearance and prevent the reflection of light.

2) Industrial hard chrome plating

A hardness of surface is over 850HV, so that its wear proof is excellent and its corrosion proof is comparable with that of martensite stainless steel. WON ST offers such surface treatment types such as alkakine coloring and color alumite treatment at a customer request. To use a linear motion guide after its surface treatment, it is necessary to set a high safety factor.

3) Fluoride low-temperature Cr plating

It is also called "Raydent." This is a combined surface treatment type of black Cr coating with special fluoride resin coating that is used in the places requiring high corrosion proof, or in cleanroom that needs to generate low dust.

9 Dust Proof

1. Dust proof

To make use of the characteristics and performance that a linear motion guide has, it is important to protect the device against external foreign substances which are causes of abnormal wear and its shortened life span. If any dust or foreign substance is expected to be mixed in, it is required to use an effective sealing or dust-proofing system.

2. Types of dust proof

WON Linear Motion Guide has basically a seal assembled. If necessary, it is possible to mount a metal scraper on the device before shipment.

1) Exclusive seal

In order to protect the inside of a bearing against foreign substances, an end seal and a side seal are installed on the both ends and bottom of a block, and an inner seal is mounted on the inside of the block.

2) Metal scraper

A metal scraper is installed outside an end seal, so that it is effective at protecting a device against foreign substances, such as hot spatter or slag generated in a welding process.

2. Mounting and fixation

In the structure affected by both vibration and impact, in the place that has complex load or moment load, it is required to fix a linear motion guide in a different way from a general one.

This is a widely used method. Push a pressure plate from the flank after slightly protruding a block and a rail. In this case, it is required to prevent the corners of the rail and block from being in contact with each other.




Figure 8. Pushing a pressure plate from the flank

This is a way of fastening a tapered fixture with a bolt. Even slightly bolting up generates big force in a horizontal direction. If it is bolted up too much, deformation may occur in rail, for instance, which needs to be taken a caution.

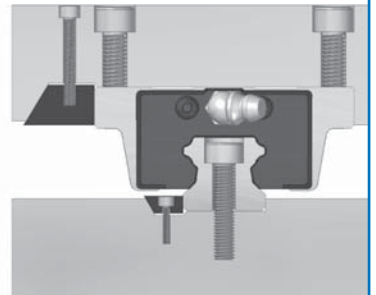


Figure 9. Pushing a tapered plate

You must be required to use miniature bolts due to the spatial constraint when a rail is pushed by a bolt. It is favorable to use as many bolts for pushing as possible.




Figure 10. Pushing a bolt from the flank

This is a way of pushing a needle roller with the head of a countersunk screw. It is careful to push it to fit the screw.

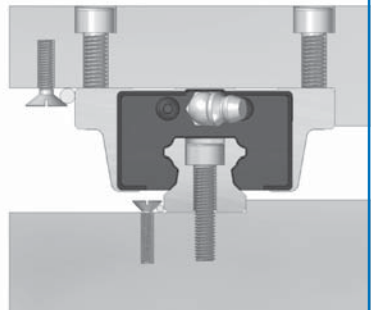


Figure 11. Pushing a roller

3. Design of the mounting surface for installation

Design and management of the mounting surface

The precision of mounting surface of a linear motion guide and an error in installation cause unexpected load and stress to the device, negatively influencing the travel and life of the device. So, it is required to take caution to prevent the harmful effects.

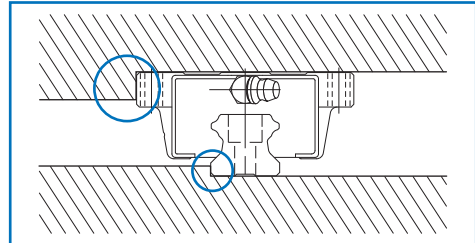


Figure 12. Shape of edges

Management of the vertical angle of the datum plane for installation

If the vertical angle of the installation surface of a rail or block and of its datum plane is inaccurate, it might not be assembled precisely. So, it is required to review an error of vertical angle in design.

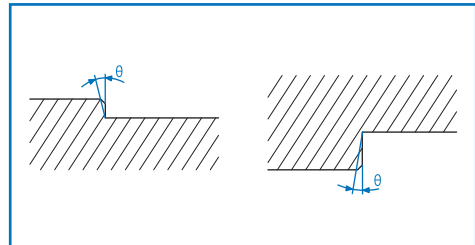


Figure 13.

Management of the datum plane for assembly

In designing a linear motion guide, it is important to manage the height and thickness of its assembly datum plane. If the height is too high or low, a rail or a block may fail to be assembled precisely due to its surface attachment; the application of eccentric load, horizontal load and moment load may loosen the strength of joint and cause poor assembly. In this case, precision fails to meet the requirements in design. So, attention must be paid.

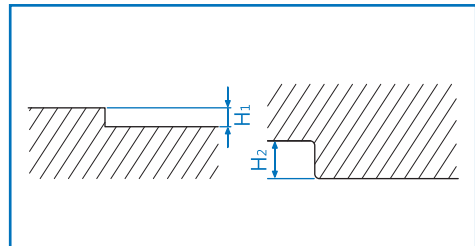


Figure 14. Vertical angle of contact datum plane

Management of the shape of contact corner

If the right-angled corner of a rail or block installed to the mounting surface of a linear motion guide is processed in R-shape and R value is bigger than the dimension of the surface of the rail or block, it is possible to cause a failure of precise assembly to the datum plane. So, attention must be paid.

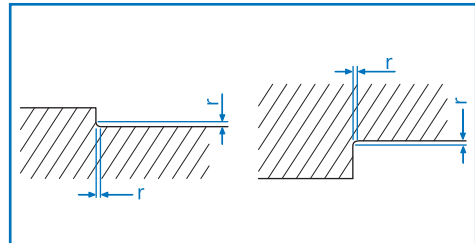


Figure 14. Vertical angle of contact datum plane

HB Series

Unit : mm

Model No.	Radius of corner of the installation to rail $r_1(\text{max.})$	Radius of corner of the installation to block $r_2(\text{max.})$	Height of raised spot of the installation to rail H_1	Height of raised spot of the installation to block H_2	H_3
17	0.4	0.4	2	4	2.5
21	0.4	0.4	2.5	5	3.3
27	0.4	0.4	2.5	5	3.5
35	0.8	0.8	3.5	5	4

S, S...S Series

Unit : mm

Model No.	Radius of corner of the installation to rail $r_1(\text{max.})$	Radius of corner of the installation to block $r_2(\text{max.})$	Height of raised spot of the installation to rail H_1	Height of raised spot of the installation to block H_2	H_3
15	0.5	0.1	2.5	4	4.5
20	0.5	1	4	5	6
25	1	1	5	5	7

M, MB Series

Unit : mm

Model No.	Radius of corner of the installation to rail $r_1(\text{max.})$	Radius of corner of the installation to block $r_2(\text{max.})$	Height of raised spot of the installation to rail H_1	Height of raised spot of the installation to block H_2	H_3
5	0.2	0.2	0.8	2	1
7	0.2	0.2	1.2	2.5	1.5
9	0.2	0.2	1.5	3	2
12	0.2	0.2	2.5	4	3
13	0.2	0.2		4.5	4
15	0.2	0.2	3	4.5	4
20	0.2	0.2	4	5	5

R Series

Unit : mm

Model No.	Radius of corner of the installation to rail $r_1(\text{max.})$	Radius of corner of the installation to block $r_2(\text{max.})$	Height of raised spot of the installation to rail H_1	Height of raised spot of the installation to block H_2	H_3
25	1	1	4	5	6.5
30	1	1	4.5	5	7
35	1	1	5	6	7
45	1.5	1.5	6	8	9.5
55	1.5	1.5	8	10	10
65	1.5	2	9	10	13

4. Error tolerance of the mounting surface for installation

1) Auto-adjusting and error-absorbing abilities

A linear motion guide has an excellent auto-adjusting ability. Therefore, even though the structure with rail assembly is slightly deformed processing error may occur a little, the straightness or parallelism of a table after assembly is better than the precision in processing before assembly, and quite linear running is available.

2) Error tolerance of the degree of parallelization when using 2-axis assembly (P₁)

The error tolerance of the degree of parallelization when a 2-axis assembly is used is shown below

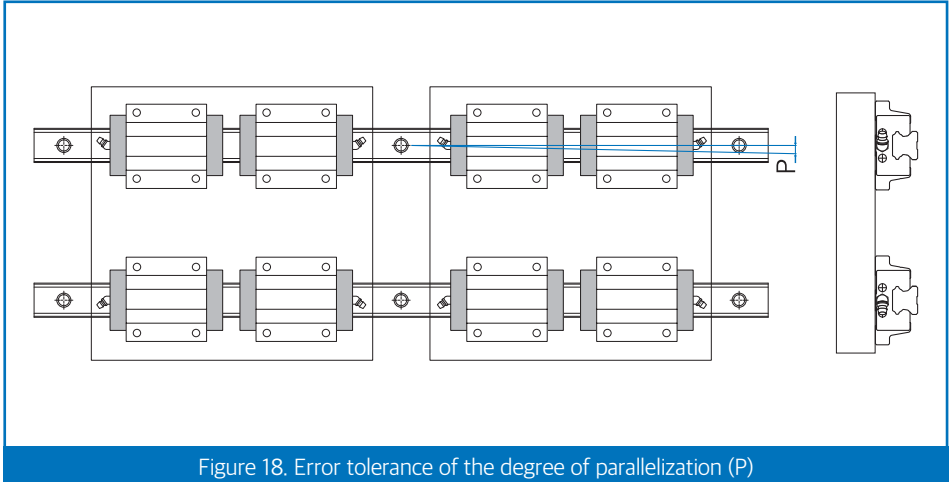


Figure 18. Error tolerance of the degree of parallelization (P)

H, H...S, HS, HS...S Series

Unit : μm

Model No.	Common clearance	G ₁ clearance	G ₂ clearance
15	25	18	-
20	25	20	18
25	30	22	20
30	40	30	27
35	50	35	30
45	60	40	35
55	70	50	45

HB SeriesUnit : μm

Model No.	Common clearance	G ₁ clearance	G ₂ clearance
17	20	15	-
21	25	18	-
27	25	20	-
35	30	22	20

S, S...S SeriesUnit : μm

Model No.	Common clearance	G ₁ clearance	G ₂ clearance
15	25	18	-
20	25	20	18
25	30	22	20

M, MB SeriesUnit : μm

Model No.	Common clearance	G ₁ clearance
5	2	-
7	3	-
9	4	3
12	9	5
13	10	6
15	10	6
20	13	8

R SeriesUnit : μm

Model No.	G ₂ clearance	G ₃ clearance
25	7	5
30	9	6
35	10	7
45	12	9
55	16	11
65	22	16

3) Error tolerance of height in 2-axis assembly (P₂)

If an error of height in installation is too big, block distortion occurs and its rigidity may be weakened due to block distortion and changes in the raceway groove of the block and rail block and in the contact angle of a ball or roller as a rolling element.

The error tolerance of height level (x) when a 2-axis linear motion guide is used is as follows.

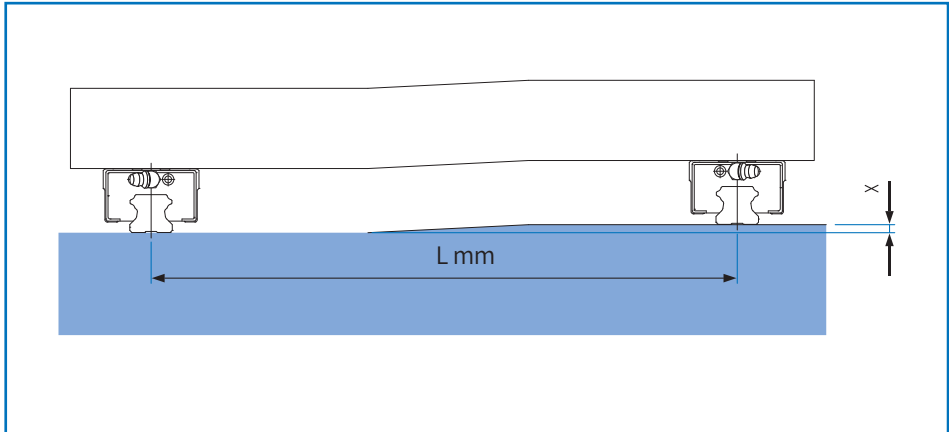


Figure 19. Error tolerance of height level in 2-axis (X)

H, H...S, S, S...S, HS, HS...S Series

Unit : μm

Model No.	Common clearance	G ₁ clearance	G ₂ clearance
15	0.26L	0.17L	-
20	0.26L	0.17L	0.10L
25	0.26L	0.17L	0.14L
30	0.34L	0.22L	0.18L
35	0.42L	0.30L	0.24L
45	0.50L	0.34L	0.28L
55	0.60L	0.42L	0.34L

HB Series

Unit : μm

Model No.	Common clearance	G ₁ clearance	G ₂ clearance
17	0.13L	0.04L	-
21	0.26L	0.17L	-
27	0.26L	0.17L	-
35	0.26L	0.17L	0.14L

M, MB Series

Unit : μm

Model No.	Common clearance	G ₁ clearance
5	0.04L	-
7	0.05L	-
9	0.07L	0.01L
12	0.10L	0.02L
13	0.12L	0.04L
15	0.12L	0.04L
20	0.14L	0.06L

R Series

Unit : μm

Model No.	G ₂ clearance	G ₃ clearance
25, 30, 35, 45, 55, 65	0.17L	0.12L

5. Description of the datum plane for installation

The datum plane of WON ST Linear Motion Guide is the ground surface on the opposite side of WON mark shown in the block.

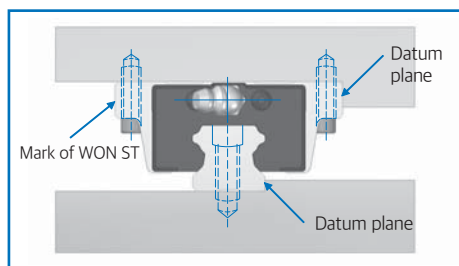


Figure 20. Linear motion guide on the reference axis

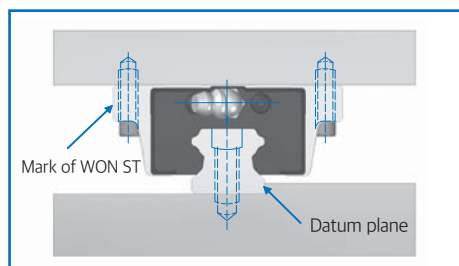


Figure 21. Linear motion guide on the driven shaft

6. Rail connection

If it is necessary to use a longer rail than the one supplied, it is possible to connect rails for the purpose of use. The mark on the rail indicates the point where rails should be linked. If a block passes through the connecting points simultaneously, that may affect travel of the unit or cause a delicate hitch. To solve this problem, it is recommended to make the connecting points intercrossed.




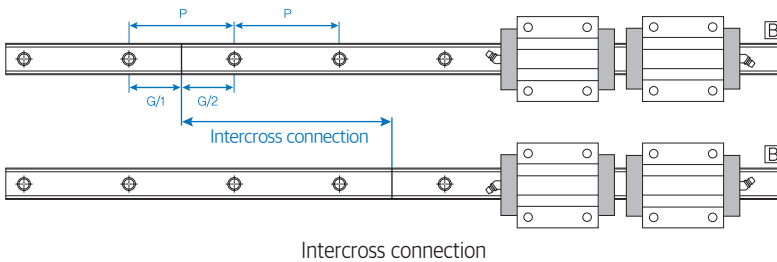


Figure 22. Rail connection

3) Installation of a block without the datum plane for a reference rail

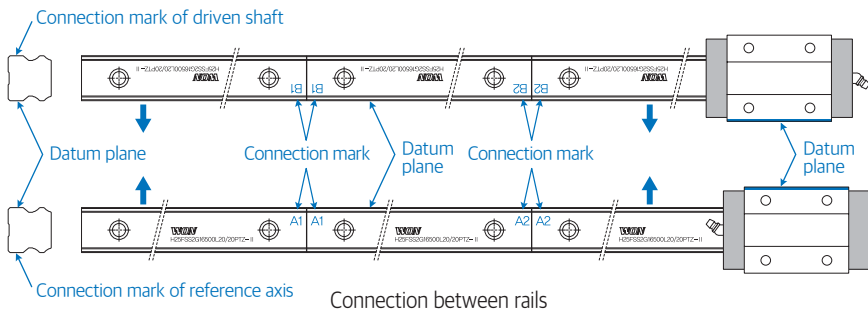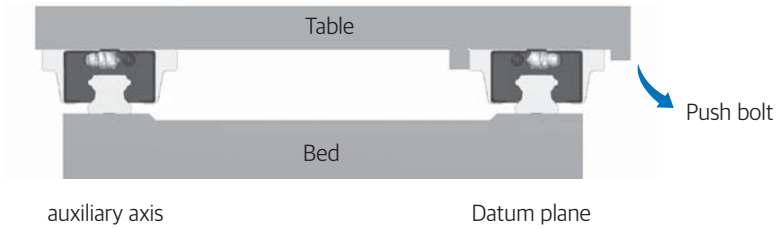


① Install a reference rail

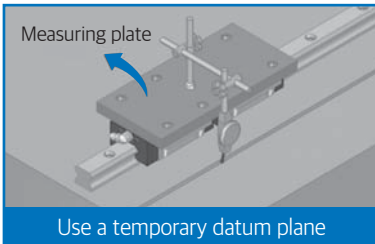

Use a temporary datum plane

Fix two blocks together onto the measuring plate and install a temporary datum plane near the rail mounting on the bed. Check the degree of parallelism of the rail, and fasten bolts in order.

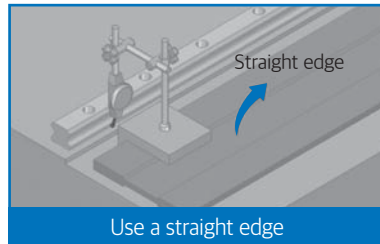


Use a straight edge

Fix a rail to the bed temporarily. Adjust it to be in straight life with the use of a dial gauge. Fasten bolts in order.


② Apply the same method when installing an auxiliary block and rail.

4) Measure precision after installation

It is possible to check the precision of travel by fixing two blocks onto the measuring plate. To measure precision, either use a straight edge and check a measurement with a dial gauge, or use a laser interferometer.

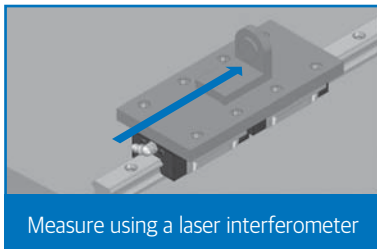

Measure using a laser interferometer

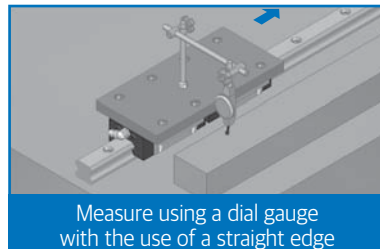

Measure using a dial gauge with the use of a straight edge

8. Torque used for fastening bolts in assembly

1) Select the optimal torque for bolts


To assemble a rail of a linear motion guide, it is required to apply bolt torque appropriately in consideration of the material of the mounting surface or bolts. Inaccurate bolt torque may affect the mounting precision of the rail. So please use a torque wrench.

2) Recommended torque by the material of the mounting base

Unit : N·m


Bolt specification	Torque value (Unit : N·m)		
	Steel	Casting	Aluminum
M3	2	1.3	1
M4	4	2.7	2
M5	8.8	5.9	4.4
M6	13.7	9.2	6.8
M8	30	20	15
M10	68	45	33
M12	120	78	58
M14	157	105	78
M16	196	131	98
M20	382	255	191

9. Bolt fastening direction by linear motion guide type




H-FN, H-FL, HB-F, H-FN...S, H-FL...S

Since the flange of a block is tap-processed and the counter bore is processed in the bottom, it is possible to tighten bolts in the up and down direction as indicated by the arrows.
But, to fasten bolts from bottom to top, it is recommended to use one size smaller.




H-RN, H-RL, HB-R, H-RN...S, H-RL...S

Since the square body of the block is tap-processed, it is used at the time when bolts need to be fastened from top to bottom as indicated by the arrow




S-RC, S-RN, S-RC...S, S-RN...S

Since the square body of the block is tap-processed, it is used at the time when bolts need to be fastened from top to bottom as indicated by the arrow




S-FC, S-FN, S-FC...S, S-FN...S

Since the flange of a block is tap-processed and the counter bore is processed in the bottom, it is possible to tighten bolts in the up and down direction as indicated by the arrows.
But, to fasten bolts from bottom to top, it is recommended to use one size smaller.



R-FN, R-FL


Since the flange of a block is tap-processed and the counter bore is processed in the bottom, it is possible to tighten bolts in the up and down direction as indicated by the arrows.
But, to fasten bolts from bottom to top, it is recommended to use one size smaller.




R-RN, R-RL, RS-RN, RS-RL

Since the square body of the block is tap-processed, it is used at the time when bolts need to be fastened from top to bottom as indicated by the arrow.


Linear Motion Guide H Series, H...S Series

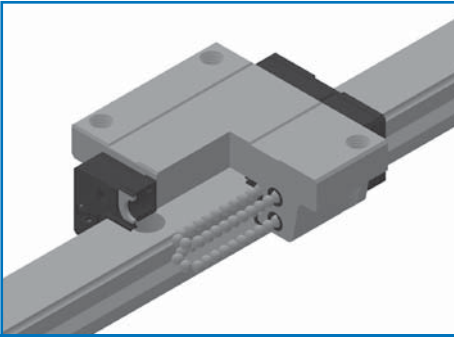


H Series (Full-ball Type)

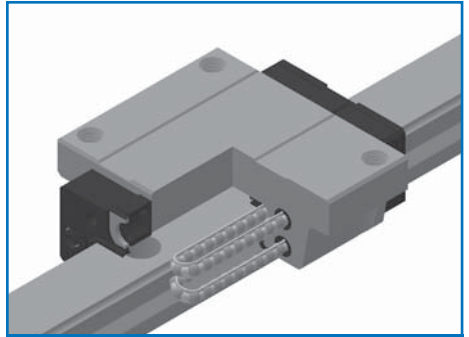


H...S Series (Spacer Chain Type)

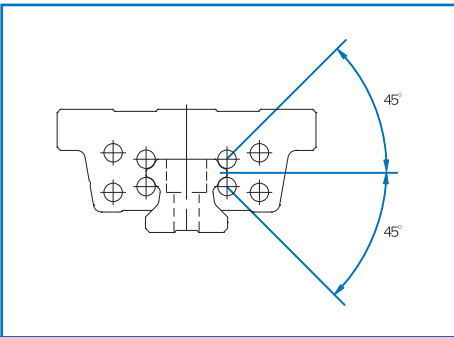


Cross Section

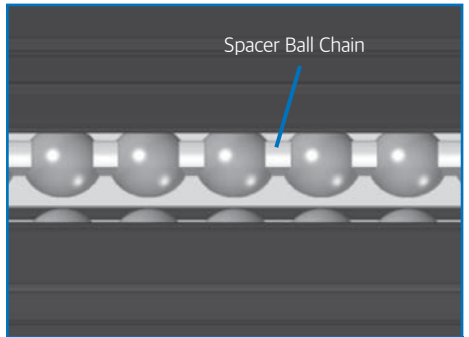

Details of Spacer of H...S Series

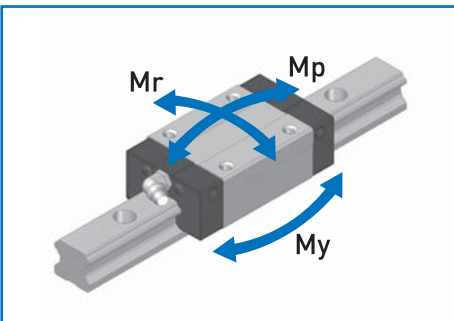


Moment Rigidity

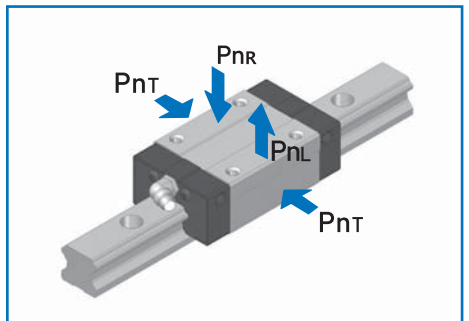

Radial Rigidity


Standard and maximum lengths of a rail

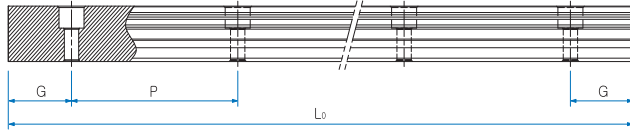


Unit : mm

Model No.	H15	H20	H25	H30	H35	H45	H55
Standard length	160	160	220	280	440	570	780
	220	220	280	360	520	675	900
	280	280	340	440	600	780	1000
	⋮	340	400	520	680	885	⋮
	1360	⋮	460	600	760	⋮	2820
	1480	1960	⋮	⋮	⋮	2880	2940
	1600	2080	2200	2520	2680	2985	3060
		2200	2320	2680	2840	3090	
		2440	2840	3000			
			3000				
Standard pitch P	60	60	60	80	80	105	120
G	20	20	20	20	20	22.5	30
Max. length	4000						

Standard tap hole type of a rail

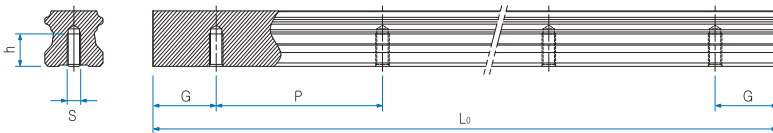


Model No.	S	h(mm)
H15	M5	8
H20	M6	10
H25	M6	12
H30	M8	15
H35	M8	17
H45	M12	24
H55	M14	24

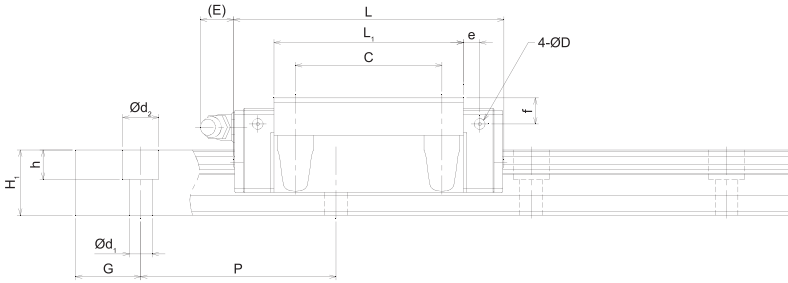



Unit : mm

Dimensions of rail						Basic load rating		Static allowance moment kN · m					Mass	
Width W ₁ ±0.05	W ₂	Height H ₁	G	Pitch P	d ₁ X d ₂ X h	C kN	C ₀ kN	M _p		M _y		M _r	Block kg	Rail kg/m
								1 block	Double blocks	1 block	Double blocks	1 block		
15	16	13	20	60	4.5x7.5x5.3	12.6	16.2	0.115	0.552	0.115	0.552	0.129	0.19	1.3
15	16	13	20	60	4.5x7.5x5.3	14.3	19.3	0.165	0.769	0.165	0.769	0.154	0.24	1.3
20	21.5	16.5	20	60	6x9.5x8.5	18.3	23.9	0.221	1.049	0.221	1.049	0.251	0.41	2.2
20	21.5	16.5	20	60	6x9.5x8.5	21.8	30.7	0.370	1.692	0.370	1.692	0.322	0.54	2.2
23	23.5	20	20	60	7x11x9	27.0	33.1	0.337	1.636	0.337	1.636	0.398	0.61	3.0
23	23.5	20	20	60	7x11x9	32.8	43.6	0.596	2.760	0.596	2.760	0.525	0.82	3.0
28	31	26	20	80	9x14x12	50.4	57.1	0.711	3.384	0.711	3.384	0.828	1.1	4.85
28	31	26	20	80	9x14x12	60.3	73.6	1.203	5.506	1.203	5.506	1.067	1.3	4.85
34	33	29	20	80	9x14x12	67.0	74.6	1.062	5.012	1.062	5.012	1.298	1.6	6.58
34	33	29	20	80	9x14x12	80.2	96.2	1.797	8.172	1.797	8.172	1.674	2.01	6.58
45	37.5	38	22.5	105	14x20x17	108.5	116.4	2.860	9.912	2.860	9.912	2.275	2.83	11.03
45	37.5	38	22.5	105	14x20x17	129.7	150.1	4.533	16.161	4.533	16.161	2.935	3.70	11.03
53	43.5	44	30	120	16x23x20	155.9	161.5	4.654	16.016	4.654	16.016	3.779	4.36	15.26
53	43.5	44	30	120	16x23x20	187.5	210.1	7.468	26.493	7.468	26.493	4.916	5.76	15.26

1N≒0.102kgf

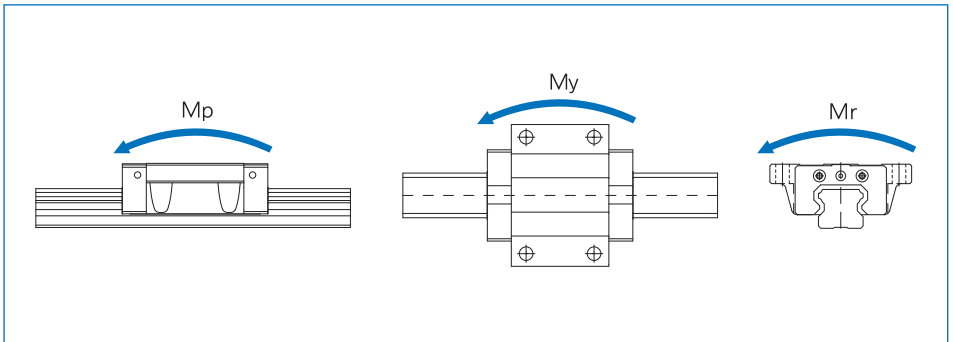


H-RN Series, H-RL Series

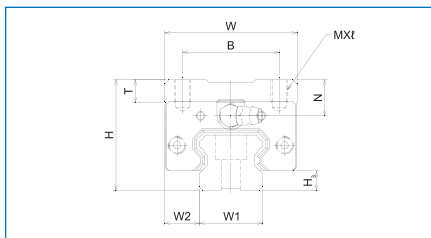

Model No.	External dimensions			Dimensions of block											Grease nipple	H ₃
	Height H	Width W	Length L	B	C	M× ϕ	L ₁	T	N	E	f	e	D			
H15RN	28	34	56.5	26	26	M4 x 5	40.8	6	10	4.7	7.7	3.25	3.3	A-M5	4.5	
H15RL	28	34	64.8	26	26	M4 x 5	49.1	6	10	4.7	7.7	3.25	3.3	A-M5	4.5	
H20RN	30	44	73.2	32	36	M5 x 6	53.1	8	7.5	10.7	6.7	4.25	3.3	B-M6F	6.0	
H20RL	30	44	89.1	32	50	M5 x 6	69	8	7.5	10.7	6.7	4.25	3.3	B-M6F	6.0	
H25RN	40	48	83.2	35	35	M6 x 8	58.3	8	13	10.2	12	5	3.3	B-M6F	7.0	
H25RL	40	48	103.1	35	50	M6 x 8	78.2	8	13	10.2	12	5	3.3	B-M6F	7.0	
H30RN	45	60	99.3	40	40	M8 x 10	70.8	8	10.3	9.8	8	5.8	5.2	B-M6F	7.5	
H30RL	45	60	121.5	40	60	M8 x 10	93	8	10.3	9.8	8	5.8	5.2	B-M6F	7.5	
H35RN	55	70	111.8	50	50	M8 x 12	80.8	10	15	9.7	13.5	6.5	5.2	B-M6F	9.0	
H35RL	55	70	137.2	50	72	M8 x 12	106.2	10	15	9.7	13.5	6.5	5.2	B-M6F	9.0	
H45RN	70	86	139.0	60	60	M10 x 17	101.9	15	20	16	18	8	3.3	B-PT1/8	10.0	
H45RL	70	86	170.8	60	80	M10 x 17	133.7	15	20	16	18	8	3.3	B-PT1/8	10.0	
H55RN	80	100	163.0	75	75	M12 x 18	117.5	18	21	16	18	9	3.3	B-PT1/8	13.0	
H55RL	80	100	201.1	75	95	M12 x 18	155.6	18	21	16	18	9	3.3	B-PT1/8	13.0	


Composition of Model Name & Number



- 1 Model No. of Linear Motion Guide
- 2 Material of block : **No symbol**-Standard material / **M**-Stainless
- 3 Type of block : **RN**-Rectangular standard type / **RL**-Rectangular long type/ **FN**-Flange standard type / **FL**-Flange long type
- 4 **No symbol**-Standard block / **E**-Special block specification
- 5 Type of seal : **No symbol**-No seal / **UU**-End seal / **SS**-End seal+Side seal+Inner seal / **DD**-Double seal+Side seal+Inner seal / **ZZ**-End seal+Side seal+Inner seal+Metal scraper / **KK**-Double seal+Side seal+Inner seal+Metal scraper / **UULF**-End seal+LF seal / **SSLF**-End seal+Side seal+Inner seal+LF seal / **DDLFL**-Double seal+Side seal+Inner seal+LF seal / **ZZLFL**-End seal+Side seal+Inner seal+Metal scraper+LF seal / **KKLFL**-Double seal+Side seal+Inner seal+Metal scraper+LF seal (*)
- 6 Number of blocks assembled in one shaft
- 7 Symbol of clearance : **No symbol**-Normal preload / **G₁**-Light preload / **G₂**-Heavy preload / **G_s**-Special preload (*2)
- 8 Material of end plate : **No symbol** - Standard material / **I** - Stainless / **N** - Aluminum
- 9 Length of rail
- 10 Material of rail : **No symbol**-Standard material / **M**-Stainless
- 11 Size of G value: standard G value has no symbol
- 12 **No symbol**-Rail counterbore type (top assembly) / **A**-Rail tap hole type (bottom assembly) (*3)
- 13 Symbol of precision : **No symbol**-Moderate / **H**-High / **P**-Precision / **SP**-Super precision / **UP**-Ultra precision (*4)
- 14 **No symbol**-Standard rail / **E**-special rail specification
- 15 Number of axes used in the same plane

(*1) See Symbol List of Optional Parts at page 101. (*2) See Radial Clearance at page 18.


(*3) See Standard Tap Hole Type of Rail at page 49. (*4) See Selection of Precision Class at page 20.

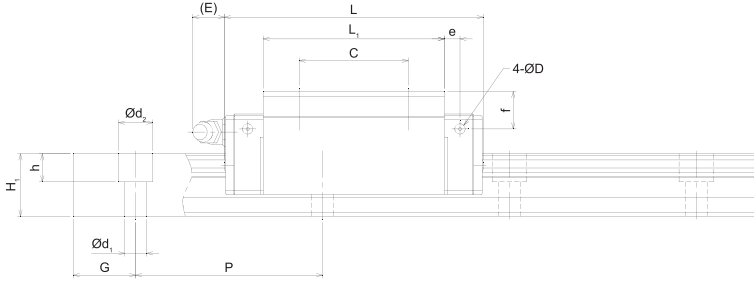



Unit : mm

Dimensions of rail						Basic load rating		Static allowance moment kN · m					Mass	
Width W ₁ ±0.05	W ₂	Height H ₁	G	Pitch P	d ₁ x d ₂ x h	C kN	C ₀ kN	M _p		M _y		M _r	Block kg	Rail kg/m
								1 block	Double blocks	1 block	Double blocks	1 block		
15	9.5	13	20	60	4.5x7.5x5.3	12.6	16.2	0.115	0.552	0.115	0.552	0.129	0.18	1.3
15	9.5	13	20	60	4.5x7.5x5.3	14.3	19.3	0.165	0.769	0.165	0.769	0.154	0.23	1.3
20	12	16.5	20	60	6x9.5x8.5	18.3	23.9	0.221	1.049	0.221	1.049	0.251	0.31	2.2
20	12	16.5	20	60	6x9.5x8.5	21.8	30.7	0.370	1.692	0.370	1.692	0.322	0.41	2.2
23	12.5	20	20	60	7x11x9	27.0	33.1	0.337	1.636	0.337	1.636	0.398	0.53	3.0
23	12.5	20	20	60	7x11x9	32.8	43.6	0.596	2.760	0.596	2.760	0.525	0.71	3.0
28	16	26	20	80	9x14x12	50.4	57.1	0.711	3.384	0.711	3.384	0.828	0.9	4.85
28	16	26	20	80	9x14x12	60.3	73.6	1.203	5.506	1.203	5.506	1.067	1.1	4.85
34	18	29	20	80	9x14x12	67.0	74.6	1.062	5.012	1.062	5.012	1.298	1.5	6.58
34	18	29	20	80	9x14x12	80.2	96.2	1.797	8.172	1.797	8.172	1.674	2.01	6.58
45	20.5	38	22.5	105	14x20x17	108.5	116.4	2.860	9.912	2.860	9.912	2.275	2.89	11.03
45	20.5	38	22.5	105	14x20x17	129.7	150.1	4.533	16.161	4.533	16.161	2.935	3.74	11.03
53	23.5	44	30	120	16x23x20	155.9	161.5	4.654	16.016	4.654	16.016	3.779	4.28	15.26
53	23.5	44	30	120	16x23x20	187.5	210.1	7.468	26.493	7.468	26.493	4.916	5.59	15.26

1N≒0.102kgf

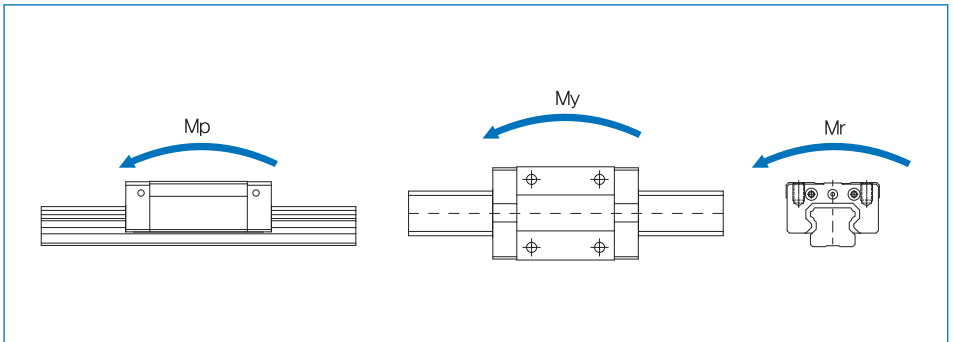


H-FN...S Series, H-FL...S Series

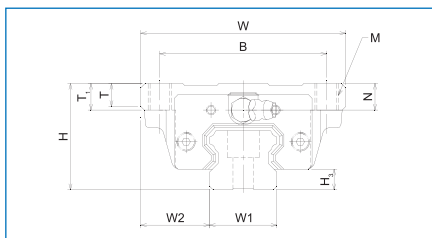

Model No.	External dimensions			Dimensions of block												Grease nipple	H ₃
	Height H	Width W	Length L	B	C	M	L ₁	T	T ₁	N	E	f	e	D			
H15FN...S	24	47	56.5	38	30	M5	40.7	7	11	6.0	4.7	3.7	3.25	3.3	A-M5	4.5	
H15FL...S	24	47	64.8	38	30	M5	49.1	7	11	6.0	4.7	3.7	3.25	3.3	A-M5	4.5	
H20FN...S	30	63	73.2	53	40	M6	53.1	9.2	10	7.5	10.7	6.7	4.25	3.3	B-M6F	6.0	
H20FL...S	30	63	89.1	53	40	M6	69.0	9.2	10	7.5	10.7	6.7	4.25	3.3	B-M6F	6.0	
H25FN...S	36	70	83.2	57	45	M8	58.3	11.5	16	9.0	10.2	8	5	3.3	B-M6F	7.0	
H25FL...S	36	70	103.1	57	45	M8	78.2	11.5	16	9.0	10.2	8	5	3.3	B-M6F	7.0	
H30FN...S	42	90	99.3	72	52	M10	70.8	9.5	18	7.3	9.8	5	5.8	5.2	B-M6F	7.5	
H30FL...S	42	90	121.5	72	52	M10	93.0	9.5	18	7.3	9.8	5	5.8	5.2	B-M6F	7.5	
H35FN...S	48	100	111.8	82	62	M10	80.8	12.5	21	8.0	9.7	6.5	6.5	5.2	B-M6F	9.0	
H35FL...S	48	100	137.2	82	62	M10	106.2	12.5	21	8.0	9.7	6.5	6.5	5.2	B-M6F	9.0	


Composition of Model Name & Number



- 1 Model No.
- 2 Material of block : No symbol-Standard material / M-Stainless
- 3 Type of block : RN-Rectangular standard type / RL-Rectangular long type/ FN-Flange standard type / FL-Flange long type
- 4 No symbol-Standard block / E-Special block specification
- 5 Type of seal : No symbol-No seal / UU-End seal / SS-End seal+Side seal+Inner seal / DD-Double seal+Side seal+Inner seal / ZZ-End seal+Side seal+Inner seal+Metal scraper / KK-Double seal+Side seal+Inner seal+Metal scraper / UULF-End seal+LF seal / SSLF-End seal+Side seal+Inner seal+LF seal / DDLF-Double seal+Side seal+Inner seal+LF seal / ZZLF-End seal+Side seal+Inner seal+Metal scraper+LF seal / KKLf-Double seal+Side seal+Inner seal+Metal scraper+LF seal (*1)
- 6 Number of blocks assembled in one shaft
- 7 S-Spacer chain type
- 8 Symbol of clearance : No symbol-Normal preload / G₁-Light preload / G₂-Heavy preload / G_S-Special preload (*2)
- 9 Material of end plate : No symbol - Standard material / I - Stainless / N - Aluminum
- 10 Length of rail
- 11 Material of rail : No symbol-Standard material / M-Stainless
- 12 Size of G value: standard G value has no symbol
- 13 No symbol-Rail counterbore type (top assembly) / A-Rail tap hole type (bottom assembly) (*3)
- 14 Symbol of precision : No symbol-Moderate / H-High / P-Precision / SP-Super precision / UP-Ultra precision (*4)
- 15 No symbol-Standard rail / E-special rail specification
- 16 Number of axes used in the same plane

(*1) See Symbol List of Optional Parts at page 101. (*2) See Radial Clearance at page 18.


(*3) See Standard Tap Hole Type of Rail at page 49. (*4) See Selection of Precision Class at page 20.

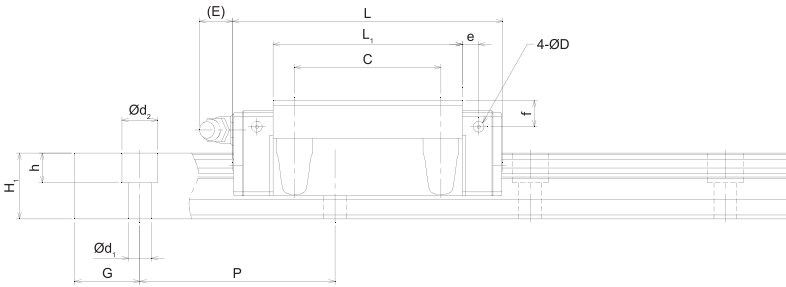



Unit : mm

Dimensions of rail						Basic load rating		Static allowance moment kN · m					Mass	
Width W ₁ ±0.05	W ₂	Height H ₁	G	Pitch P	d ₁ x d ₂ x h	C kN	C ₀ kN	M _p		M _y		M _r	Block kg	Rail kg/m
								1 block	Double blocks	1 block	Double blocks	1 block		
15	16	13	20	60	4.5x7.5x5,3	12.1	16.2	0.115	0.552	0.115	0.552	0.129	0.19	1.3
15	16	13	20	60	4.5x7.5x5,3	13.7	19.3	0.165	0.769	0.165	0.769	0.154	0.24	1.3
20	21.5	16.5	20	60	6x9.5x8.5	17.6	23.9	0.221	1.049	0.221	1.049	0.251	0.41	2.2
20	21.5	16.5	20	60	6x9.5x8.5	21.1	30.7	0.370	1.692	0.370	1.692	0.322	0.54	2.2
23	23.5	20	20	60	7x11x9	25.8	33.1	0.337	1.636	0.337	1.636	0.398	0.61	3.0
23	23.5	20	20	60	7x11x9	31.7	43.6	0.596	2.760	0.596	2.760	0.525	0.82	3.0
28	31	26	20	80	9x14x12	48	57.1	0.711	3.384	0.711	3.384	0.828	1.1	4.85
28	31	26	20	80	9x14x12	58	73.6	1.203	5.506	1.203	5.506	1.067	1.3	4.85
34	33	29	20	80	9x14x12	63.7	74.6	1.062	5.012	1.062	5.012	1.298	1.6	6.58
34	33	29	20	80	9x14x12	77.1	96.2	1.797	8.172	1.797	8.172	1.674	2.01	6.58

1N≒0.102kgf

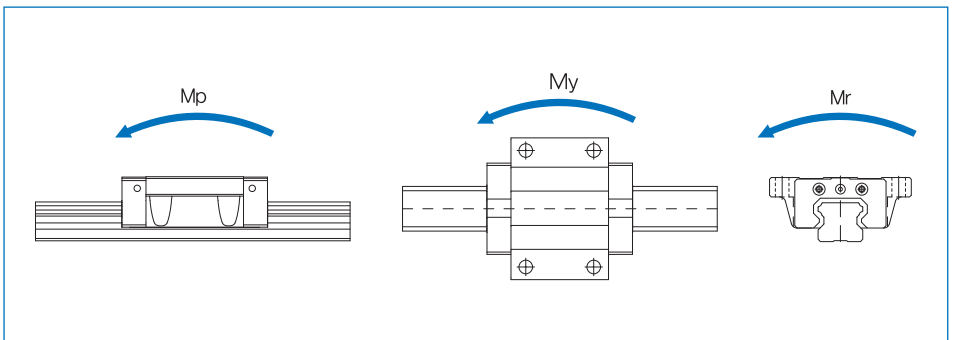


H-RN...S Series, H-RL...S Series

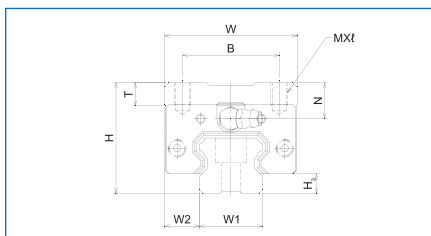

Model No.	External dimensions			Dimensions of block											Grease nipple	H ₃
	Height H	Width W	Length L	B	C	M×I	L ₁	T	N	E	f	e	D			
H 15RN...S	28	34	56.5	26	26	M4 × 5	40.7	6	10	4.7	7.7	3.25	3.3	A-M5	4.5	
H 15RL...S	28	34	64.8	26	26	M4 × 5	49.1	6	10	4.7	7.7	3.25	3.3	A-M5	4.5	
H 20RN...S	30	44	73.2	32	36	M5 × 6	53.1	8	7.5	10.7	6.7	4.25	3.3	B-M6F	6.0	
H 20RL...S	30	44	89.1	32	50	M5 × 6	69	8	7.5	10.7	6.7	4.25	3.3	B-M6F	6.0	
H 25RN...S	40	48	83.2	35	35	M6 × 8	58.3	8	13	10.2	12	5	3.3	B-M6F	7.0	
H 25RL...S	40	48	103.1	35	50	M6 × 8	78.2	8	13	10.2	12	5	3.3	B-M6F	7.0	
H 30RN...S	45	60	99.3	40	40	M8 × 10	70.8	8	10.3	9.8	8	5.8	5.2	B-M6F	7.5	
H 30RL...S	45	60	121.5	40	60	M8 × 10	93	8	10.3	9.8	8	5.8	5.2	B-M6F	7.5	
H 35RN...S	55	70	111.8	50	50	M8 × 12	80.8	10	15	9.7	13.5	6.5	5.2	B-M6F	9.0	
H 35RL...S	55	70	137.2	50	72	M8 × 12	106.2	10	15	9.7	13.5	6.5	5.2	B-M6F	9.0	


Composition of Model Name & Number



- 1 Model No.
- 2 Material of block : No symbol-Standard material / M-Stainless
- 3 Type of block : RN-Rectangular standard type / RL-Rectangular long type/ FN-Flange standard type / FL-Flange long type
- 4 No symbol-Standard block / E-Special block specification
- 5 Type of seal : No symbol-No seal / UU-End seal / SS-End seal+Side seal+Inner seal / DD-Double seal+Side seal+Inner seal / ZZ-End seal+Side seal+Inner seal+Metal scraper / KK-Double seal+Side seal+Inner seal+Metal scraper / UULF-End seal+LF seal / SSLF-End seal+Side seal+Inner seal+LF seal / DDLF-Double seal+Side seal+Inner seal+LF seal / ZZLF-End seal+Side seal+Inner seal+Metal scraper+LF seal / KKLf-Double seal+Side seal+Inner seal+Metal scraper+LF seal (*1)
- 6 Number of blocks assembled in one shaft
- 7 S-Spacer chain type
- 8 Symbol of clearance : No symbol-Normal preload / G₁-Light preload / G₂-Heavy preload / G_s-Special preload (*2)
- 9 Material of end plate : No symbol - Standard material / I - Stainless / N - Aluminum
- 10 Length of rail
- 11 Material of rail : No symbol-Standard material / M-Stainless
- 12 Size of G value: standard G value has no symbol
- 13 No symbol-Rail counterbore type (top assembly) / A-Rail tap hole type (bottom assembly) (*3)
- 14 Symbol of precision : No symbol-Moderate / H-High / P-Precision / SP-Super precision / UP-Ultra precision (*4)
- 15 No symbol-Standard rail / E-special rail specification
- 16 Number of axes used in the same plane

(*1) See Symbol List of Optional Parts at page 101. (*2) See Radial Clearance at page 18.


(*3) See Standard Tap Hole Type of Rail at page 49. (*4) See Selection of Precision Class at page 20.

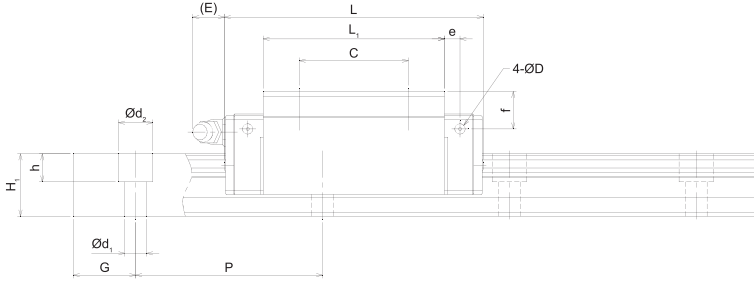



Unit : mm

Dimensions of rail						Basic load rating		Static allowance moment kN · m					Mass	
Width W ₁ ±0.05	W ₂	Height H ₁	G	Pitch P	d ₁ x d ₂ x h	C kN	C ₀ kN	M _p		M _y		M _r	Block kg	Rail kg/m
								1 block	Double blocks	1 block	Double blocks	1 block		
15	9.5	13	20	60	4.5x7.5x5.3	12.1	16.2	0.115	0.552	0.115	0.552	0.129	0.18	1.3
15	9.5	13	20	60	4.5x7.5x5.3	13.7	19.3	0.165	0.769	0.165	0.769	0.154	0.23	1.3
20	12	16.5	20	60	6x9.5x8.5	17.6	23.9	0.221	1.049	0.221	1.049	0.251	0.31	2.2
20	12	16.5	20	60	6x9.5x8.5	21.1	30.7	0.370	1.692	0.370	1.692	0.322	0.41	2.2
23	12.5	20	20	60	7x11x9	25.8	33.1	0.337	1.636	0.337	1.636	0.398	0.53	3.0
23	12.5	20	20	60	7x11x9	31.7	43.6	0.596	2.760	0.596	2.760	0.525	0.71	3.0
28	16	26	20	80	9x14x12	48	57.1	0.711	3.384	0.711	3.384	0.828	0.9	4.85
28	16	26	20	80	9x14x12	58	73.6	1.203	5.506	1.203	5.506	1.067	1.1	4.85
34	18	29	20	80	9x14x12	63.7	74.6	1.062	5.012	1.062	5.012	1.298	1.5	6.58
34	18	29	20	80	9x14x12	77.1	96.2	1.797	8.172	1.797	8.172	1.674	2.01	6.58

1N=0.102kgf

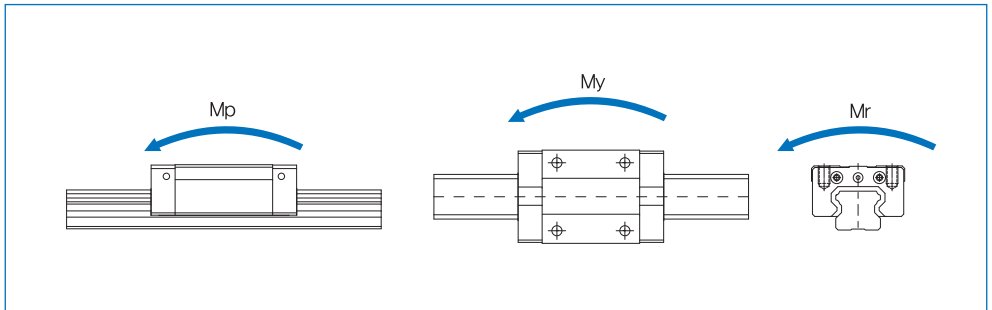

HB-F Series

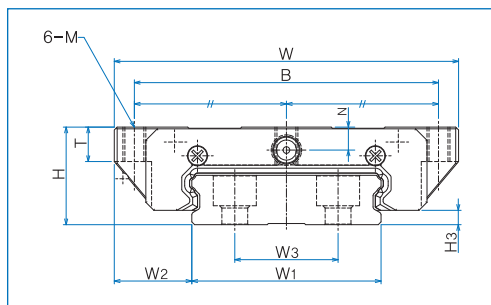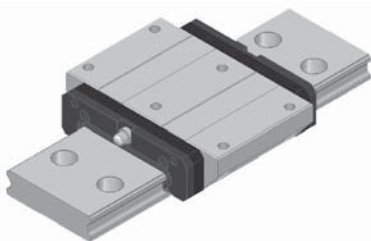

Model No.	External dimensions			Dimensions of block								H ₃
	Height H	Width W	Length L	B	C	M	L ₁	T	N	E	Grease nipple	
HB17F	17	60	51	53	26	M4	37.4	6	4	3.5	A-Ø3	2.5
HB21F	21	68	59	60	29	M5	45.4	8	5	3.5	A-Ø3	3.3
HB27F	27	80	72.5	70	40	M6	54.7	10	6	10.3	B-M6F	3.5
HB35F	35	120	105.3	107	60	M8	82.1	14	7.6	10.3	B-M6F	4


Composition of Model Name & Number



- 1 Model No.
- 2 Type of block : F-Flange standard type / R-Rectangular standard type
- 3 No symbol-Standard block / E-Special block specification
- 4 Type of seal : No symbol-No seal / UU-End seal / SS-End seal+ Inside seal / ZZ-End seal+ Inside seal+ Metal scraper / UULF-End seal+ LF seal / SSLF-End seal+ Inside seal+ LF seal / ZZLF-End seal+ Inside seal+ Metal scraper + LF seal (*1)
- 5 Number of blocks assembled in one shaft
- 6 No symbol-Full ball type
- 7 Symbol of clearance : No symbol-Normal preload / G₁-Light preload / G₂-Heavy preload / G_s-Special preload (*2)
- 8 Length of rail
- 9 Size of G value: standard G value has no symbol
- 10 No symbol-Rail counterbore type (top assembly)
- 11 Symbol of precision : No symbol-Moderate / H-High / P-Precision / SP-Super precision / UP-Ultra precision (*3)
- 12 No symbol-Standard rail / E-special rail specification
- 13 Number of axes used in the same plane

(*1) See Symbol List of Optional Parts at page 101. (*2) See Radial Clearance at page 18.


(*3) See Selection of Precision Class at page 20.

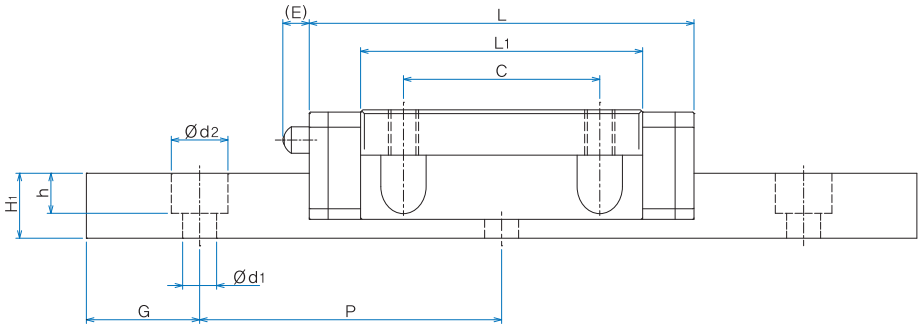



Unit : mm

Dimensions of rail							Basic load rating		Static allowance moment kN · m					Mass	
Width W ₁ 0 -0.05	W ₂	W ₃	Height H ₁	G	Pitch P	d ₁ x d ₂ x h	C kN	C ₀ kN	M _p		M _y		M _r	Block kg	Rail kg/m
									1 block	Double blocks	1 block	Double blocks	1 block		
33	13.5	18	8.6	15	40	4.5x7.5x5.3	7.3	12.2	0.081	0.381	0.081	0.381	0.205	0.15	1.9
37	15.5	22	11	15	50	4.5x7.5x5.3	8.4	14.8	0.119	0.547	0.119	0.547	0.278	0.24	2.9
42	19	24	15	20	60	4.5x7.5x5.3	15.3	24.8	0.239	1.114	0.239	1.114	0.527	0.47	4.5
69	25.5	40	19	20	80	7x11x9	33.9	53.2	0.773	3.528	0.773	3.528	1.851	1.40	9.6

1N=0.102kgf

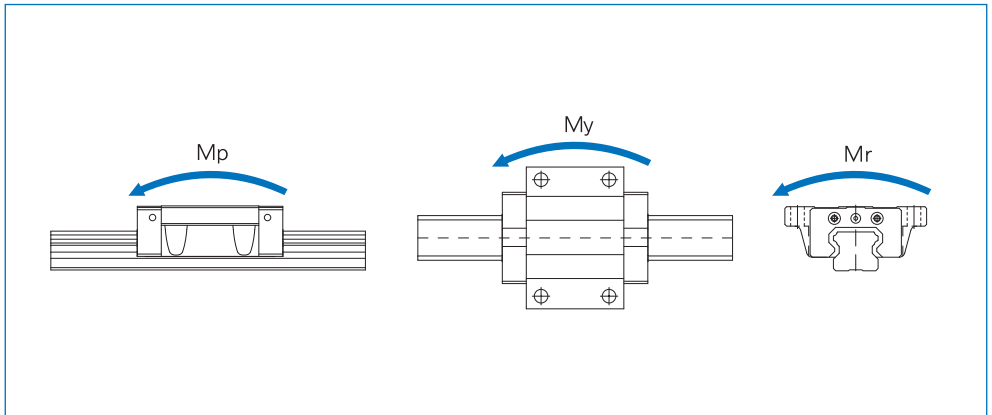


HB-R Series

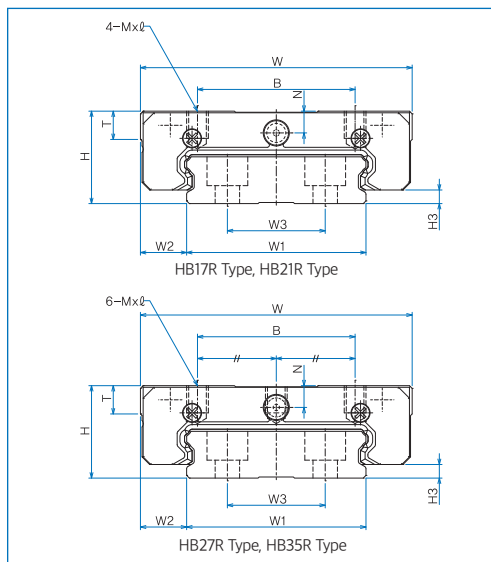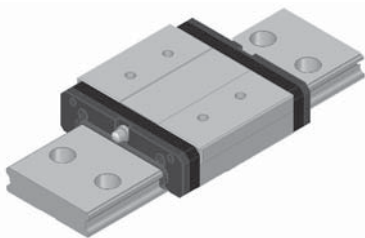


Model No.	External dimensions			Dimensions of block								H ₃
	Height H	Width W	Length L	B	C	M X ℓ	L ₁	T	N	E	Grease nipple	
HB17R	17	50	51	29	15	M4 X 5	37.4	5.2	4	3.5	A-Ø3	2.5
HB21R	21	54	59	31	19	M5 X 6	45.4	8	5	3.5	A-Ø3	3.3
HB27R	27	62	72.5	46	32	M6 X 6	54.7	10	6	10.3	B-M6F	3.5
HB35R	35	100	105.3	76	50	M8 X 8	82.1	14	7.6	10.3	B-M6F	4

Composition of Model Name & Number



- 1 Model No.
- 2 Type of block : F-Flange standard type / R-Rectangular standard type
- 3 No symbol-Standard block / E-Special block specification
- 4 Type of seal : No symbol-No seal / UU-End seal / SS-End seal+ Inside seal / ZZ-End seal+ Inside seal+ Metal scraper / UULF -End seal+ LF seal / SSLF-End seal+ Inside seal+ LF seal / ZZLF-End seal+ Inside seal+ Metal scraper+ LF seal (*1)
- 5 Number of blocks assembled in one shaft
- 6 No symbol-Full ball type
- 7 Symbol of clearance : No symbol-Normal preload / G₁-Light preload / G₂-Heavy preload / G_s-Special preload (*2)
- 8 Length of rail
- 9 Size of G value: standard G value has no symbol
- 10 No symbol-Rail counterbore type (top assembly)
- 11 Symbol of precision : No symbol-Moderate / H-High / P-Precision / SP-Super precision / UP-Ultra precision (*3)
- 12 No symbol-Standard rail / E-special rail specification
- 13 Number of axes used in the same plane


(*1) See Symbol List of Optional Parts at page 101. (*2) See Radial Clearance at page 18.
(*3) See Selection of Precision Class at page 20.

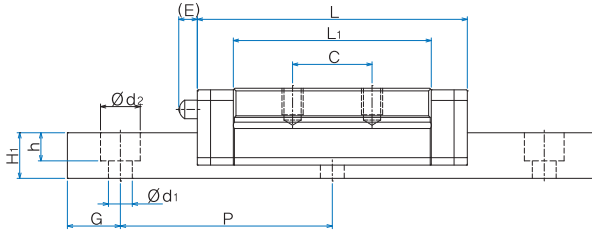


Unit : mm

Dimensions of rail							Basic load rating		Static allowance moment kN · m					Mass	
Width W_1 0 -0.05	W_2	W_3	Height H_1	G	Pitch P	$d_1 \times d_2 \times h$	C kN	C_0 kN	M_p		M_y		M_r	Block kg	Rail kg/m
									1 block	Double blocks	1 block	Double blocks	1 block		
33	8.5	18	8.6	15	40	4.5x7.5x5.3	7.3	12.2	0.081	0.381	0.081	0.381	0.205	0.13	1.9
37	8.5	22	11	15	50	4.5x7.5x5.3	8.4	14.8	0.119	0.547	0.119	0.547	0.278	0.19	2.9
42	10	24	15	20	60	4.5x7.5x5.3	15.3	24.8	0.239	1.114	0.239	1.114	0.527	0.36	4.5
69	15.5	40	19	20	80	7x11x9	33.9	53.2	0.773	3.528	0.773	3.528	1.851	1.20	9.6


1N=0.102kgf

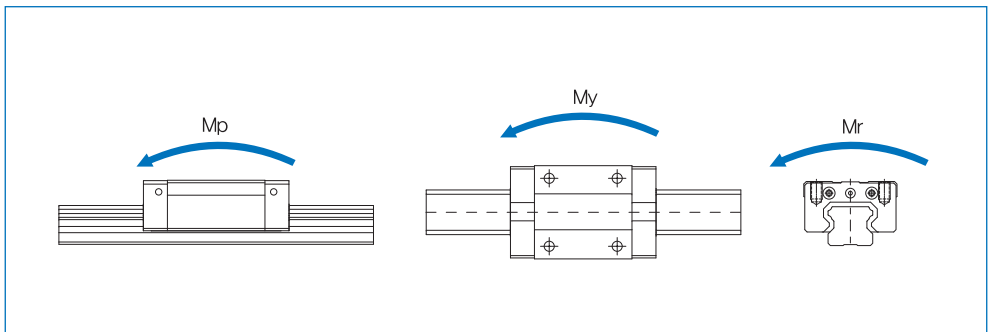


Slim Linear Motion Guide S, S...S Series

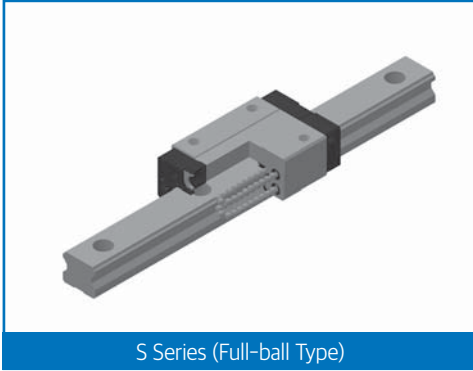


S Series (Full-ball Type)

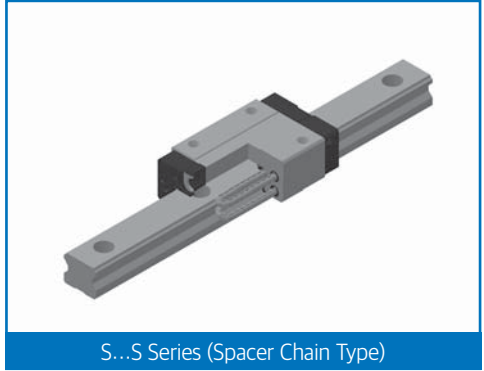


S...S Series (Spacer Chain Type)

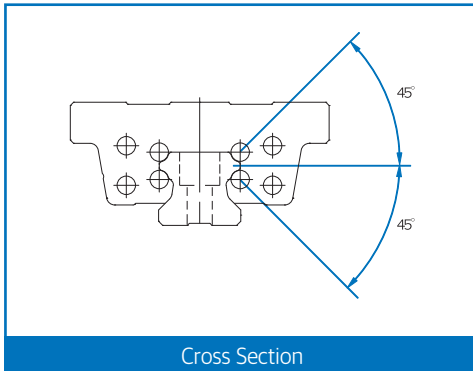


Cross Section

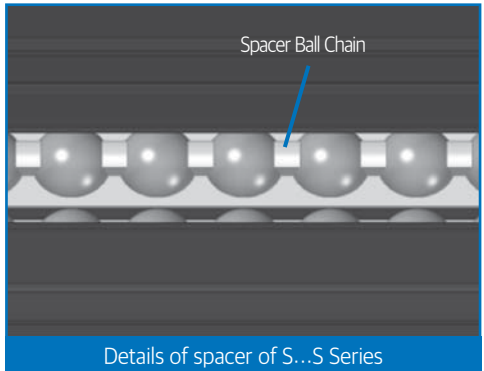

Details of spacer of S...S Series

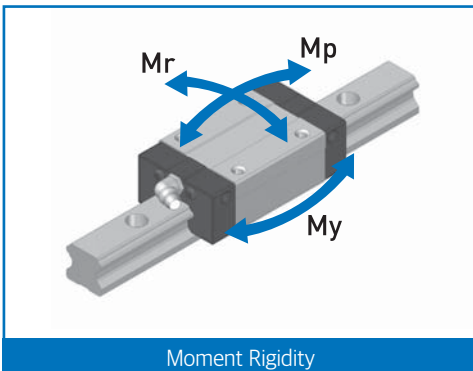


Moment Rigidity

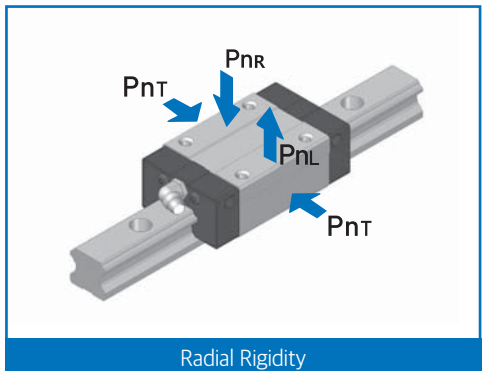

Radial Rigidity


Standard and maximum lengths of rail

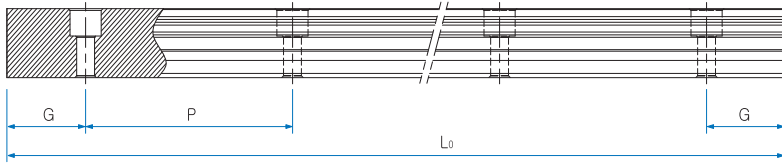


Unit: mm

Model No.	S15	S20	S25
Standard length	160	160	220
	220	220	280
	280	280	340
	⋮	340	400
	1360	⋮	460
	1480	1960	⋮
	1600	2080	2200
		2200	2320
		2440	
Standard pitch P	60	60	60
G	20	20	20
Max. length	4000		

Standard tap hole type of rail

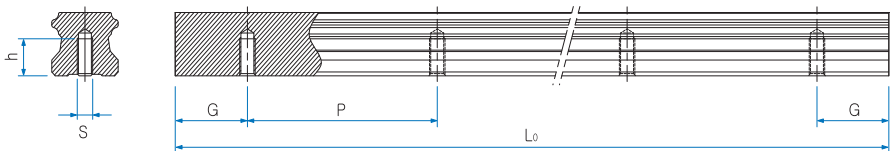


Model No.	S	h(mm)
S15	M5	8
S20	M6	10
S25	M6	12

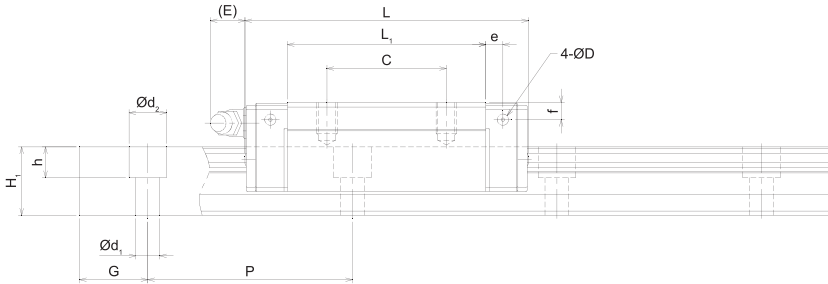


Unit : mm

Dimensions of rail						Basic load rating		Static allowance moment kN · m					Mass	
Width W ₁ ±0.05	W ₂	Height H ₁	G	Pitch P	d ₁ x d ₂ x h	C kN	C ₀ kN	M _p		M _y		M _r	Block kg	Rail kg/m
								1 block	Double blocks	1 block	Double blocks	1 block		
15	9.5	13	20	60	4.5x7.5x5.3	9.0	10	0.042	0.224	0.042	0.224	0.079	0.096	1.3
						12.6	16.2	0.115	0.552	0.115	0.552	0.129	0.156	
20	11	16.5	20	60	6x9.5x8.5	12.0	13.1	0.063	0.342	0.063	0.342	0.137	0.153	2.2
						16.8	21.2	0.173	0.838	0.173	0.838	0.223	0.246	
23	12.5	20	20	60	7x11x9	19.2	20.4	0.123	0.670	0.123	0.670	0.246	0.254	3.0
						27.0	33.1	0.337	1.636	0.337	1.636	0.398	0.413	

1N=0.102kgf

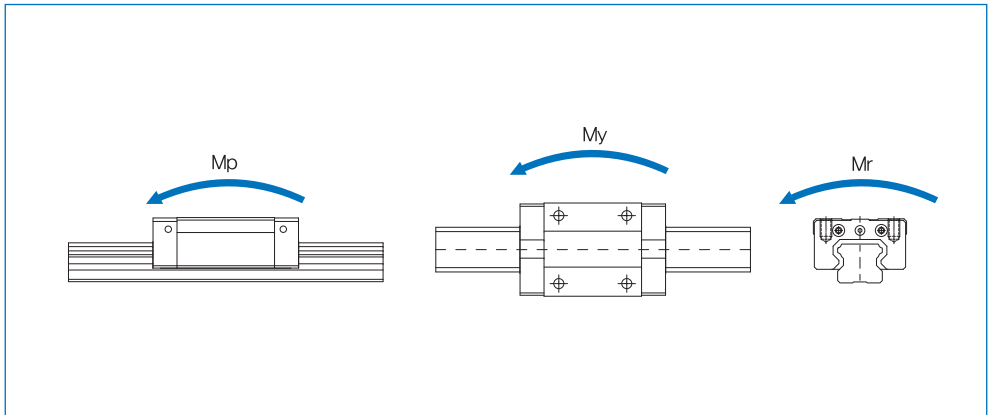


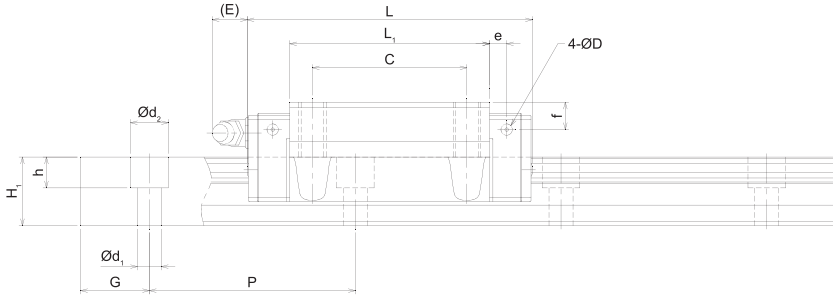


Unit : mm

Dimensions of rail						Basic load rating		Static allowance moment kN · m					Mass	
Width W ₁ ±0.05	W ₂	Height H ₁	G	Pitch P	d ₁ x d ₂ x h	C kN	C ₀ kN	M _p		M _y		M _r	Block kg	Rail kg/m
								1 block	Double blocks	1 block	Double blocks	1 block		
15	18.5	13	20	60	4.5x7.5x5.3	9.0	10	0.042	0.224	0.042	0.224	0.079	0.125	1.3
						12.6	16.2	0.115	0.552	0.115	0.552	0.129	0.203	
20	19.5	16.5	20	60	6x9.5x8.5	12.0	13.1	0.063	0.342	0.063	0.342	0.137	0.187	2.2
						16.8	21.2	0.173	0.838	0.173	0.838	0.223	0.301	
23	25.0	20	20	60	7x11x9	19.2	20.4	0.123	0.670	0.123	0.670	0.246	0.320	3.0
						27.0	33.1	0.337	1.636	0.337	0.163	0.398	0.527	

1N=0.102kgf

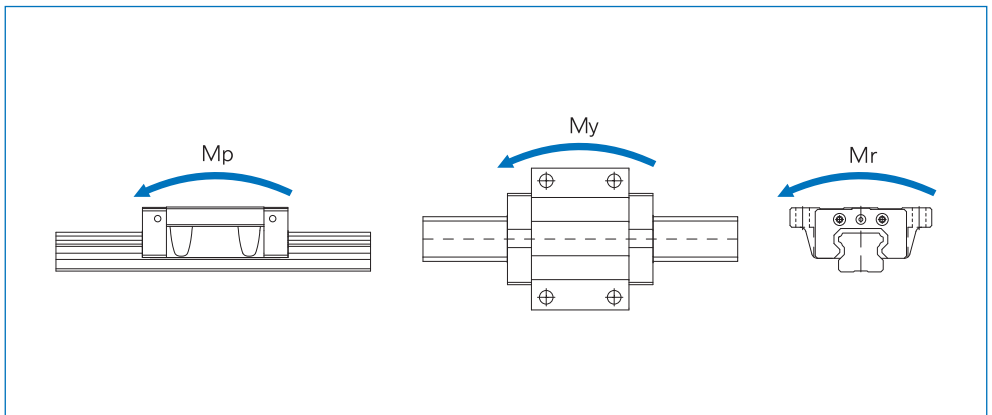


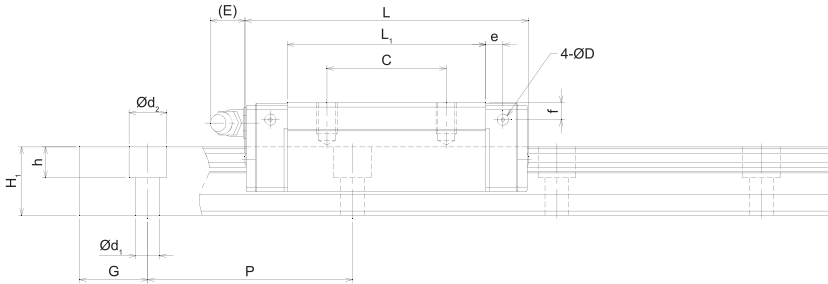



Unit : mm

Dimensions of rail						Basic load rating		Static allowance moment kN · m					Mass	
WIDTH W ₁ ±0.05	W ₂	Height H ₁	G	Pitch P	d ₁ x d ₂ x h	C kN	C ₀ kN	M _p		M _y		M _r	Block kg	Rail kg/m
								1 block	Double blocks	1 block	Double blocks	1 block		
15	9.5	13	20	60	4.5x7.5x5.3	8.3	10	0.042	0.224	0.042	0.224	0.079	0.096	1.3
						12.1	16.2	0.115	0.552	0.115	0.552	0.129	0.156	
20	11	16.5	20	60	6x9.5x8.5	11.1	13.1	0.063	0.342	0.063	0.342	0.137	0.153	2.2
						16.1	21.2	0.173	0.838	0.173	0.838	0.223	0.246	
23	12.5	20	20	60	7x11x9	17.9	20.4	0.123	0.670	0.123	0.670	0.246	0.254	3.0
						25.8	33.1	0.337	1.636	0.337	1.636	0.398	0.413	

1N=0.102kgf

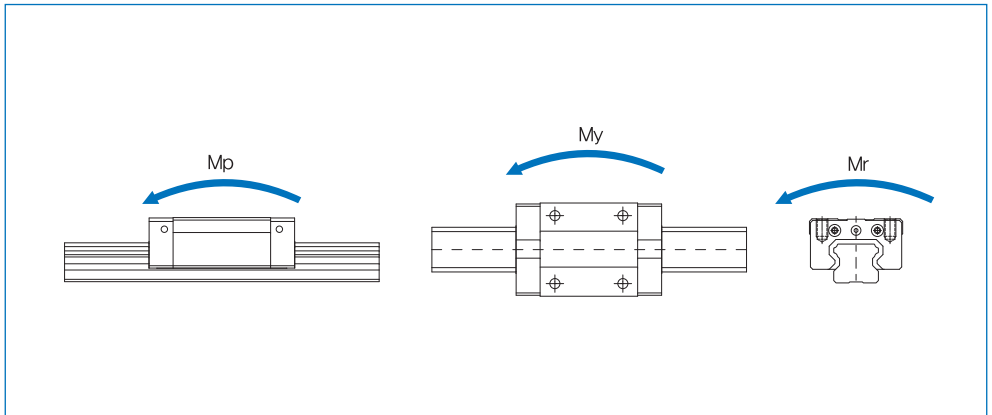

S-FC...SSeries, S-FN...SSeries

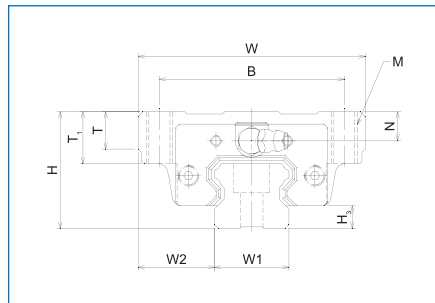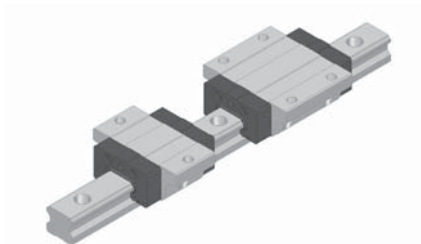

Model No.	External dimensions			Dimensions of block													H ₃
	HEIGHT H	WIDTH W	LENGTH L	B	C	M	L ₁	T	T ₁	N	E	f	e	D	Grease nipple		
S15FC...S	24	52	39.8	41	-	M5	24.0	6	7	6	4.7	3.7	3.25	3.3	A-M5	4.5	
S15FN...S			56.5		26		40.7										
S20FC...S	28	59	47.8	49	-	M6	27.6	8	9	5.5	10.7	4.7	4.25	3.3	B-M6F	6	
S20FN...S			66.8		32		46.7										
S25FC...S	33	73	59.4	60	-	M8	34.4	9	10	6	10.2	5	5	3.3	B-M6F	7	
S25FN...S			83.2		35		58.2										


Composition of Model Name & Number



- 1 Model No.
- 2 Material of block : No symbol-Standard material / M-Stainless
- 3 Type of block : RC-Rectangular short type / RN-Rectangular standard type / FC-Flange short type/ FN-Flange standard type
- 4 No symbol-Standard block / E-Special block specification
- 5 Type of seal : No symbol-No seal / UU-End seal / SS-End seal+Side seal+Inner seal / DD-Double seal+Side seal+Inner seal / ZZ-End seal+Side seal+Inner seal+Metal scraper / KK-Double seal+Side seal+Inner seal+Metal scraper / UULF-End seal+LF seal / SSLF-End seal+Side seal+Inner seal+LF seal / DDLF-Double seal+Side seal+Inner seal+LF seal / ZZLF-End seal+Side seal+Inner seal+Metal scraper+LF seal / KKLf-Double seal+Side seal+Inner seal+Metal scraper+LF seal (*1)
- 6 Number of blocks assembled in one shafted in one shaft
- 7 S-Spacer chain type
- 8 Symbol of clearance : No symbol-Normal preload / G₁-Light preload / G₂-Heavy preload / G_s-Special preload (*2)
- 9 Material of end plate : No symbol - Standard material / I - Stainless / N - Aluminum
- 10 Length of rail
- 11 Material of rail : No symbol-Standard material / M-Stainless
- 12 Size of G value: standard G value has no symbol
- 13 No symbol-Rail counterbore type (top assembly) / A-Rail tap hole type (bottom assembly) (*3)
- 14 Symbol of precision : No symbol-Moderate / H-High / P-Precision / SP-Super precision / UP-Ultra precision (*4)
- 15 No symbol-Standard rail / E-special rail specification
- 16 Number of axes used in the same plane

(*1) See Symbol List of Optional Parts at page 101. (*2) See Radial Clearance at page 18.


(*3) See Standard Tap Hole Type of Rail at page 67. (*4) See Selection of Precision Class at page 20.

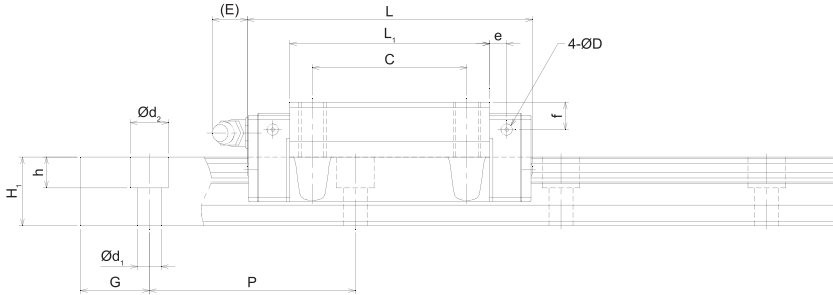







Unit : mm

Dimensions of rail						Basic load rating		Static allowance moment kN · m					Mass	
WIDTH W ₁ ±0.05	W ₂	Height H ₁	G	Pitch P	d ₁ x d ₂ x h	C kN	C ₀ kN	M _p		M _y		M _r	Block kg	Rail kg/m
								1 block	Double blocks	1 block	Double blocks	1 block		
15	18.5	13	20	60	4.5x7.5x5.3	8.3	10	0.042	0.224	0.042	0.224	0.079	0.125	1.3
						12.1	16.2	0.115	0.552	0.115	0.552	0.129	0.203	
20	19.5	16.5	20	60	6x9.5x8.5	11.1	13.1	0.063	0.342	0.063	0.342	0.137	0.187	2.2
						16.1	21.2	0.173	0.838	0.173	0.838	0.223	0.301	
23	25.0	20	20	60	7x11x9	17.9	20.4	0.123	0.670	0.123	0.670	0.246	0.320	3.0
						25.8	33.1	0.337	1.636	0.337	1.636	0.398	0.527	


1N=0.102kgf

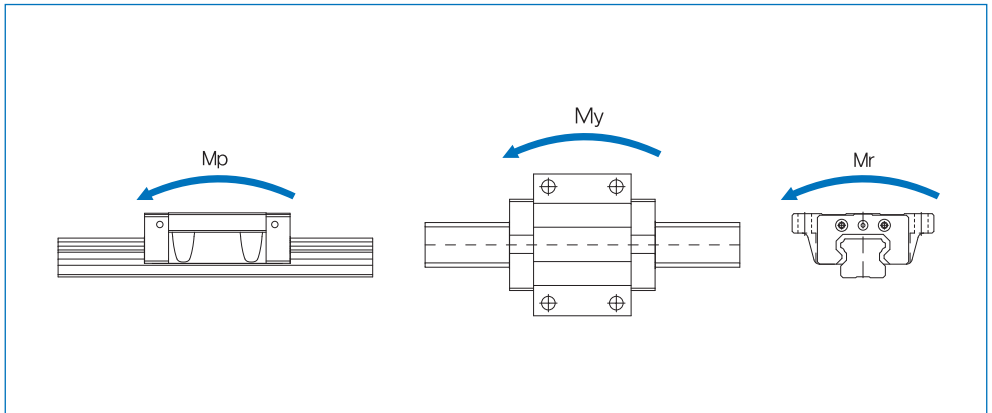

6. Slim Linear Motion Guide HS, HS...S Series

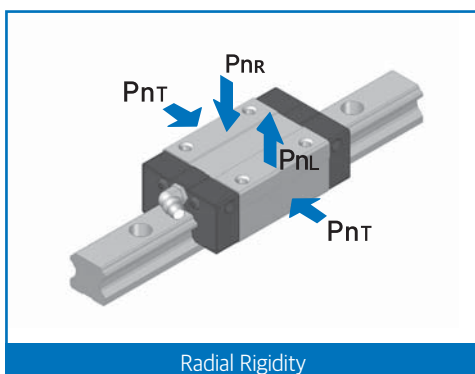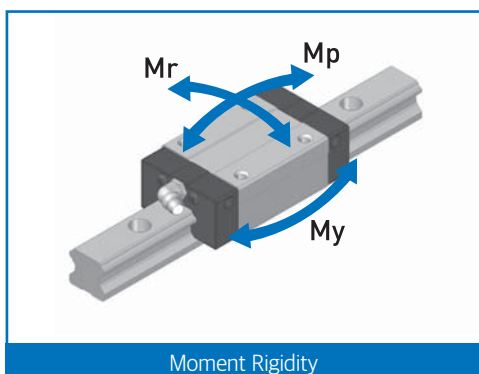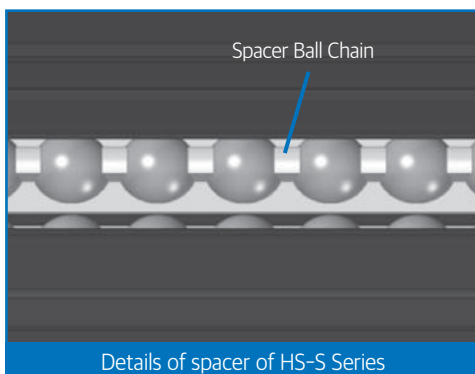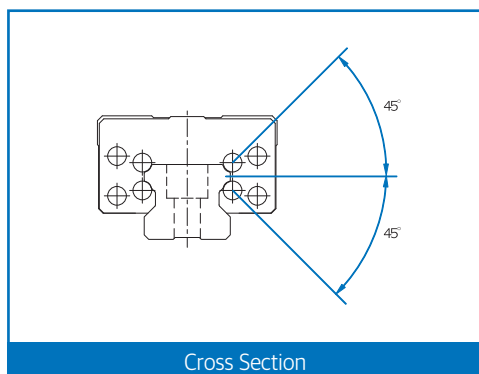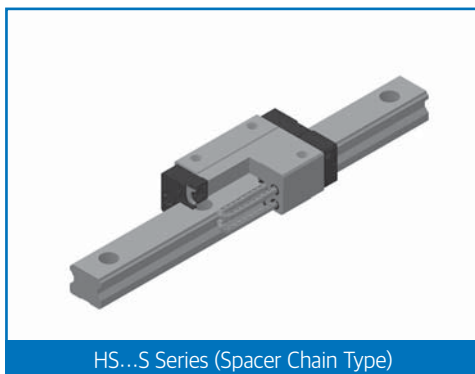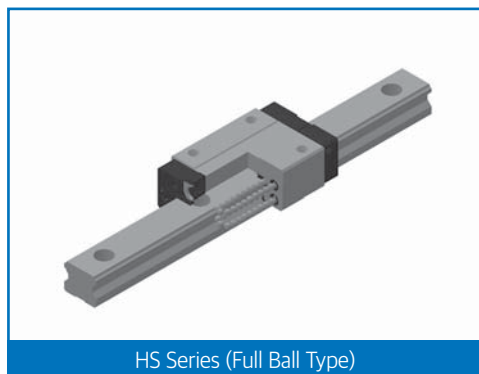


Standard and maximum lengths of rail

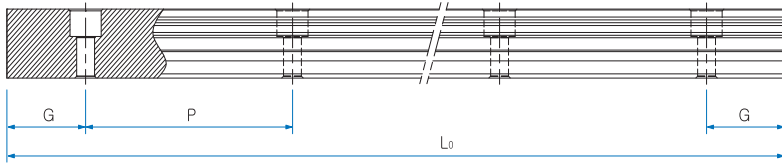

Unit: mm



Model No.	HS25	HS30	HS35	HS45	HS55
Standard length	220	280	440	570	780
	340	360	520	675	900
	400	440	600	780	1020
	⋮	520	760	885	⋮
	2200	⋮	840	⋮	2820
	2320	2520	⋮	2880	2940
	2440	2680	2840	2985	3060
		2840	2920	3090	
			3000		
Standard pitch P	60	80	80	10.5	120
G	20	20	20	22.5	30
Max. length	4000				

Standard tap hole type of rail

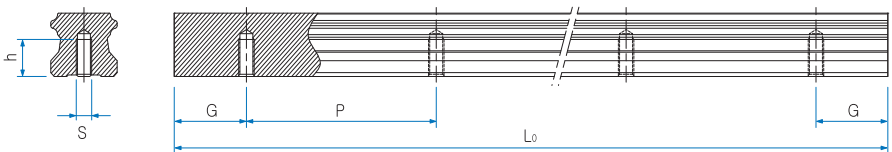


Model No.	S	h(mm)
HS25	M6	12
HS30	M8	15
HS35	M8	17
HS45	M12	24
HS55	M14	24

HS-RN Series, HS-RL Series

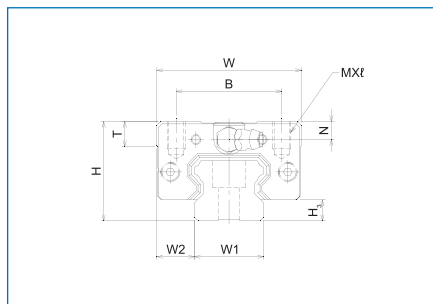

Model No.	External dimensions			Dimensions of block											Grease nipple	H ₃
	Height H	Width W	Length L	B	C	M×ℓ	L ₁	T	N	E	f	e	D			
HS25RN	36	48	83.2	35	35	M6×6.5	58.3	8	9	10.2	8	5	3.3	B-M6F	7	
HS25RL			103.1		50		78.2									
HS30RN	42	60	99.3	40	40	M8×8	70.8	8	8.2	9.8	5.9	5.8	5.2	B-M6F	7	
HS30RL			121.5		60		93									
HS35RN	48	70	111.8	50	50	M8×10	80.8	15	10	9.7	8.5	6.5	5.2	B-M6F	7.5	
HS35RL			137.2		72		106.2									

Composition of Model Name & Number




- 1 Model No.
- 2 Type of block : **RC**-Rectangular short type / **RN**-Rectangular standard type / **FC**-Flange short type/ **FN**-Flange standard type
- 3 **No symbol**-Standard block / **E**-Special block specification
- 4 Type of seal : **No symbol**-No seal / **UU**-End seal / **SS**-End seal+Side seal+Inner seal / **DD**-Double seal+Side seal+Inner seal / **ZZ**-End seal+Side seal+Inner seal+Metal scraper / **KK**-Double seal+Side seal+Inner seal+Metal scraper / **UULF**-End seal+LF seal / **SSLF**-End seal+Side seal+Inner seal+LF seal / **DDLFL**-Double seal+Side seal+Inner seal+LF seal / **ZZLF**-End seal+Side seal+Inner seal+Metal scraper+LF seal / **KKLFL**-Double seal+Side seal+Inner seal+Metal scraper+LF seal (*1)
- 5 seal+Metal scraper+LF seal / **KKLFL**-Double seal+Side seal+Inner seal+Metal scraper+LF seal (*1)
- 6 Number of blocks assembled in one shaft
- 7 Symbol of clearance : **No symbol**-Normal preload / **G₁**-Light preload / **G₂**-Heavy preload / **G_s**-Special preload (*2)
- 8 Material of end plate : **No symbol** - Standard material / **I** - Stainless / **N** - Aluminum
- 9 Length of rail
- 10 Material of rail : **No symbol**-Standard material / **M**-Stainless
- 11 Size of G value: standard G value has no symbol
- 12 **No symbol**-Rail counterbore type (top assembly) / **A**-Rail tap hole type (bottom assembly) (*3)
- 13 Symbol of precision : **No symbol**-Moderate / **H**-High / **P**-Precision / **SP**-Super precision / **UP**-Ultra precision (*4)
- 14 **No symbol**-Standard rail / **E**-special rail specification

Number of axes used in the same plane

(*1) See Symbol List of Optional Parts at page 101. (*2) See Radial Clearance at page 18.


(*3) See Standard Tap Hole Type of Rail at page 77. (*4) See Selection of Precision Class at page 20.

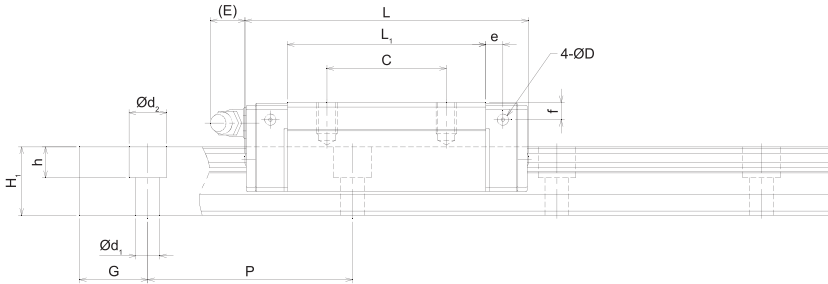


Unit : mm

Dimensions of rail						Basic load rating		Static allowance moment kN · m					Mass	
Width W ₁ ±0.05	W ₂	Height H ₁	G	Pitch P	d ₁ x d ₂ x h	C kN	C ₀ kN	M _p		M _y		M _r	Block kg	Rail kg/m
								1 block	Double blocks	1 block	Double blocks	1 block		
23	12.5	20	20	60	7x11x9	27.0	33.1	0.337	1.636	0.337	1.636	0.398	0.53	3.0
						32.8	43.6	0.596	2.760	0.596	2.760	0.525	0.71	
28	16	25.1	20	80	9x14x14.1	50.4	57.1	0.711	3.384	0.711	3.384	0.828	0.9	4.85
						60.3	73.6	1.203	5.506	1.203	5.506	1.067	1.1	
34	18	27	20	80	9x14x13	67.0	74.6	1.062	5.012	1.062	5.012	1.298	1.5	6.58
						80.2	96.2	1.797	8.172	1.797	8.172	1.674	2.01	

1N=0.102kgf

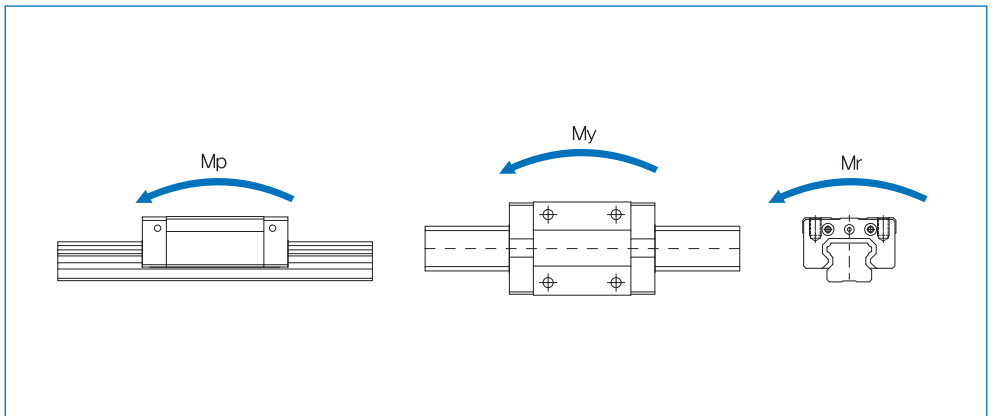


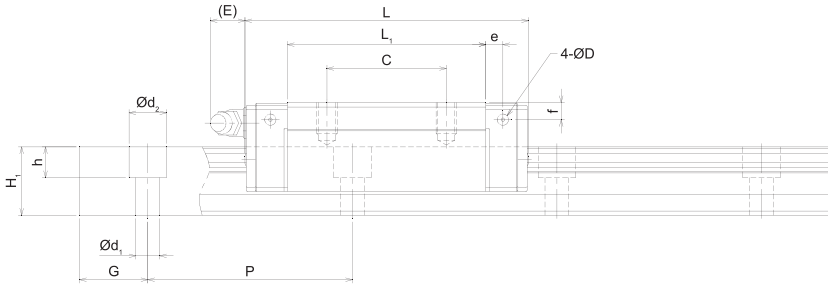




Unit : mm

Dimensions of rail						Basic load rating		Static allowance moment kN · m					Mass	
Width W ₁ ±0.05	W ₂	Height H ₁	G	Pitch P	d ₁ x d ₂ x h	C kN	C ₀ kN	M _p		M _y		M _r	Block kg	Rail kg/m
								1 block	Double blocks	1 block	Double blocks	1 block		
23	12.5	20	20	60	7x11x9	25.8	33.1	0.337	1.636	0.337	1.636	0.398	0.53	3.0
						31.7	43.6	0.596	2.760	0.596	2.760	0.525	0.71	
28	16	25.1	20	80	9x14x14.1	48.0	57.1	0.711	3.384	0.711	3.384	0.828	0.9	4.85
						58.0	73.6	1.203	5.506	1.203	5.506	1.067	1.1	
34	18	27	20	80	9x14x13	63.7	74.6	1.062	5.012	1.062	5.012	1.298	1.5	6.58
						77.1	96.2	1.797	8.172	1.797	8.172	1.674	2.01	



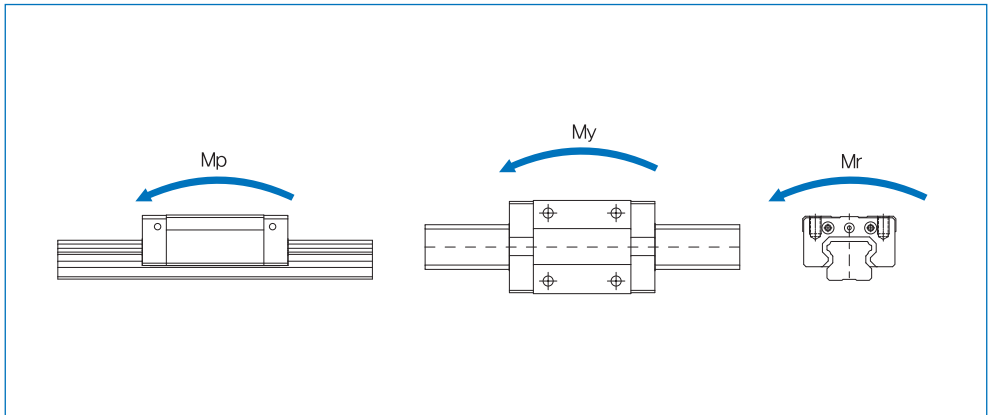



1N=0.102kgf

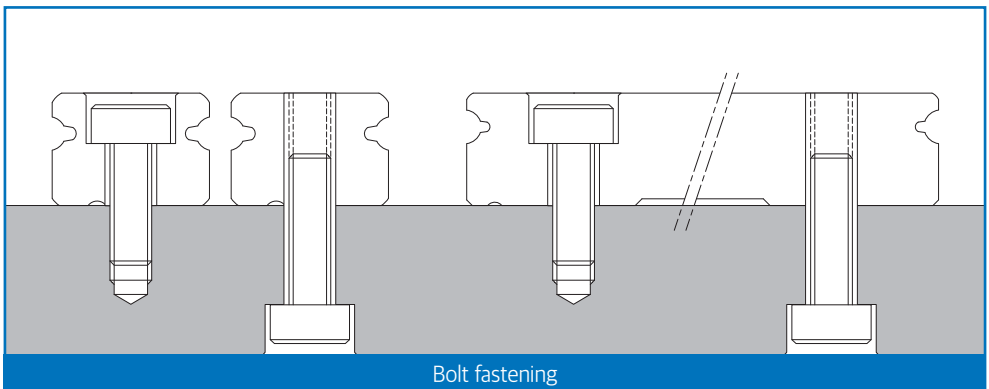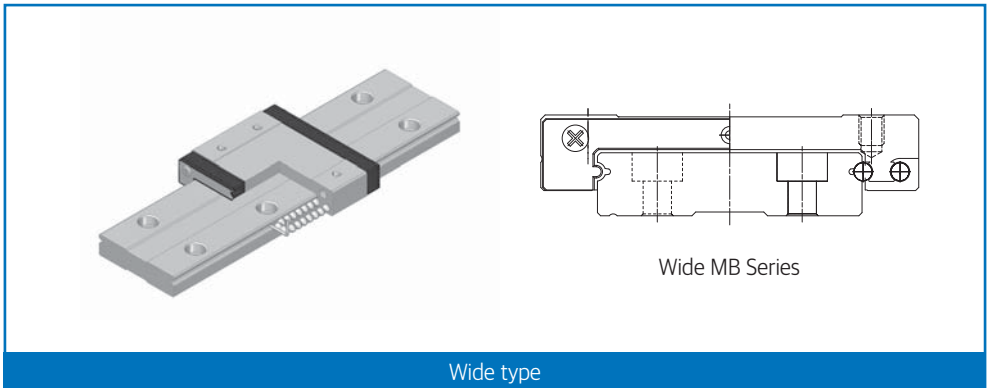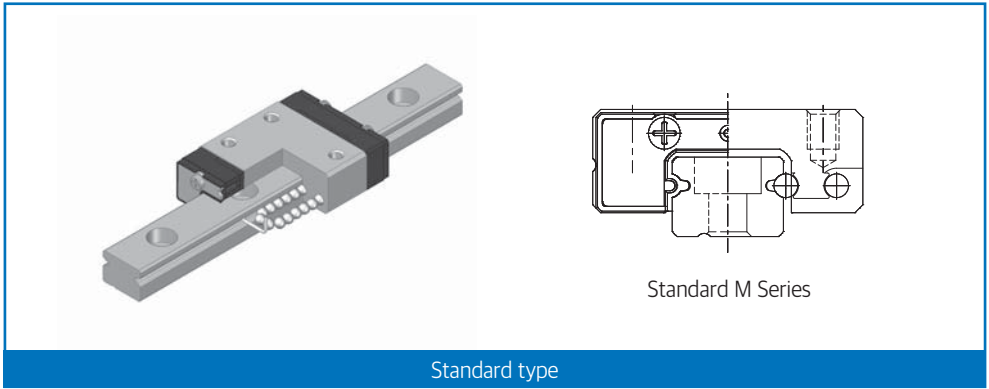


Miniature Linear Motion Guide M, MB Series



Types and Features

Category	Type	Shape & Feature		
Compact type	M-C		Standard Type of Miniature Linear Motion Guide The bearing steel materials for M12 and M15 (MT12, MT15) are available	Semiconductor inspection equipment Semiconductor assembly equipment Display inspection Head-axis LED inspection equipment Pneumatic machinery Table cylinder Automation machinery Medical equipment Smart actuator Cartesian coordinated robot UVW stage
	M-N			
	M-L			
Flange type	MB-C MBT-C		Wider block (W) and longer total length (L1) than M Series; highly-rigid and wide type with improved load rating and allowance moment The bearing steel materials for MB12 and MB15 (MBT12, MBT15) are available	
	MB-N MBT-N			
	MB-L MBT-L			

Standard and maximum lengths of rail

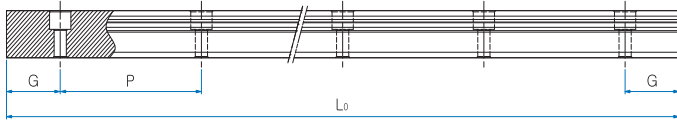


Unit : mm

Model No.	M5	M7	M9	M12	MT12	M15	MT15	M20
Standard type	40	40	55	70	70	70	70	220
	55	55	75	95	95	110	110	280
	70	70	95	120	120	150	150	340
	⋮	⋮	115	145	145	190	190	460
	100	100	⋮	170	170	230	230	⋮
	130	130	275	⋮	⋮	⋮	⋮	1120
	160	160	375	570	570	670	670	1240
			495	695	695	870	870	1360
Standard maximum length	1000	1000	995	995	1995	1990	1990	1960
	Standard pitch P	15	15	20	25	25	40	40
G	5	5	7.5	10	10	15	15	20
Maximum length	1000			2000				

MB5	MB7	MB9	MB12	MBT12	MBT13	MB15	MBT15
50	50	50	70	70	110	110	110
70	80	80	110	110	150	150	150
90	110	110	150	150	190	190	190
⋮	⋮	140	190	190	230	230	230
130	260	⋮	230	230	270	270	270
150	290	500	⋮	⋮	⋮	⋮	⋮
170	350	710	590	590	750	750	750
		860	750	750	790	790	790
			910	910	910	910	910
990	980	2000	1990	1990	1990	1990	1990
20	30	30	40	40	40	40	40
5	10	10	15	15	15	15	15
1000	2000						



Standard tap hole type of rail



Model No.	S(Penetrated)
M5	M2.6
M7	M3
M9	M4
M12 / MT12	M4
M15 / MT15	M4
M20	M6

Model No.	S(Penetrated)
MB5	M3
MB7	M4
MB9	M4
MB12 / MBT12	M5
MBT13	M5
MB15 / MBT15	M5


M Series

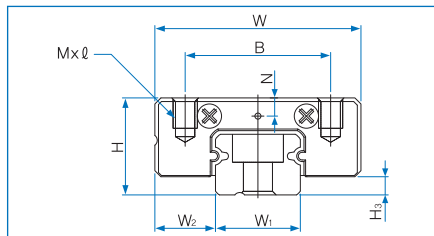

Model No.	External dimensions			Dimensions of block							H ₃
	Height H	Width W	Length L	B	C	M × ℓ	L ₁	N	E	Grease nipple	
M 5C	6	12	17	8	–	M2 × 1.5	9.4	1.2	–	–	1
M 5N			20		7		M2.6 × 1.5				
M 5NA			–	–	–	–					
M 7C	8	17	19.8	12	–	M2 × 2.5	9.6	1.5	–	–	1.5
M 7N			24.3		8		14.1				
M 7L			31.8		13		21.6				
M 7LA			31.0		12		20.8				
M 9C	10	20	22.4	15	–	M3 × 3	11.8	2.2	–	–	2
M 9N			31.3		10		20.7				
M 9L			41.4		16		30.8				
M 9LA			–		15		–				
M 12C	13	27	26.4	20	–	M3 × 3.5	12.8	2.7	–	–	3
M 12N			34.9		15		21.3				
M 12L			45.4		20		31.8				
M 15C	16	32	34.4	25	–	M3 × 4	17.7	3.1	3.3	A–M3	4
M 15N			44.4		20		27.7				
M 15L			59.4		25		42.7				
M 20C			39.8		–		22.2				
M 20N	20	40	51.8	30	25	M4 × 6	34.2	4.2	3.3	A–M3	5
M 20L			69.8		30		52.2				

※ The carbon steel materials based rails for M12 and M15 (MT12, MT15) are reserved.

Composition of Model Name & Number



- 1 Model No.
- 2 Material of block : No symbol-Stainless / T-Carbon steel (*1)
- 3 Type of block : C-Short type/ N-Standard type / L-Long type
- 4 No symbol-Standard block / E-Special block specificatio
- 5 Type of seal: UU-End seal / UULF-End seal+ LF seal (*2)
- 6 Number of blocks combined in one axis
- 7 Symbol of clearance: No symbol-Normal preload / Gi-Light preload (*3)
- 8 Material of end plate: No symbol-Standard material / I - Stainless / N - Aluminum
- 9 Length of rail
- 10 Material of rail: No symbol-Stainless / T-Carbon steel
- 11 Size of G value: Standard G value has no symbol
- 12 No symbol-Rail counterbore type (top assembly) / A-Rail tap hole type (bottom assembly) (*4)
- 13 Symbol of precision: No symbol-Moderate / H-High / P-Precision (*5)
- 14 No symbol-Standard rail /E-Special rail specification
- 15 Number of axes used in the same plane


(*1) The material of carbon steel is confined to M12-M20

(*2) See Symbol List of Optional parts at page 101

(*3) See Radial Clearance at page 18

(*4) See Standard Tap Hole Type of Rail at page 85


(*5) See Selection of Precision Class at page 22

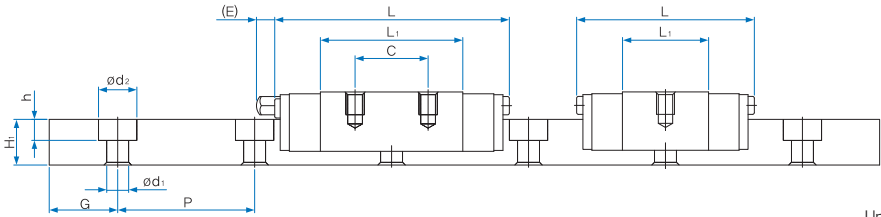



Unit : mm

Dimensions of rail						Basic load rating		Static allowance moment N · m				Mass			
Width W ₁ ±0.05	W ₂	Height H ₁	G	Pitch P	d ₁ ×d ₂ ×h	C N	C ₀ N	M _p		M _y		M _r		Block kg	Rail kg/m
								1 block	Double blocks	1 block	Double blocks	1 block	1 block		
5 ⁰ -0.02	3.5	3.7	5	15	2.4×3.6×0.8	516	757	1.3	7.1	1.3	7.1	2.01	3.1	139	
						631	1,009	2.2	11.6	2.2	11.6	2.67	4.0		
7 ⁰ -0.02	5	5	5	15	2.4×4.2×2.3	901	1,136	1.9	11.8	1.9	11.8	4.14	6.4	253	
						1,197	1,703	4.2	23.1	4.2	23.1	6.22	9.0		
						1,631	2,650	10.1	50.0	10.1	50.0	9.67	12.6		
9 ⁰ -0.02	5.5	6	7.5	20	3.5×6×3.5	1,180	1,485	3.1	17.9	3.1	17.9	6.90	9.9	391	
						1,721	2,545	9.3	46.6	9.3	46.6	11.84	17.1		
						2,375	4,030	21.9	102.8	21.9	102.8	18.74	25.2		
12 ⁰ -0.025	7.5	8	10	25	3.5×6.5×4.5	2,175	2,385	5.4	32.9	5.4	32.9	14.79	19.8	679	
						3,023	3,816	14.4	75.8	14.4	75.8	23.66	31.5		
						4,246	6,200	34.8	169.1	34.8	169.1	38.44	45.9		
15 ⁰ -0.025	8.5	10	15	40	3.5×6.5×4.5	3,418	3,895	12.2	71.6	12.2	71.6	29.99	37.8	1071	
						4,540	5,842	28.6	148.7	28.6	148.7	44.99	57.6		
						6,492	9,737	73.5	351.2	73.5	351.2	74.98	85.5		
20 ⁰ -0.03	10	11	20	60	6×9.5×5.5	4,512	5,299	20.7	115.9	20.7	115.9	54.05	80.1	1572	
						6,191	8,328	50.2	252.7	50.2	252.7	84.94	119.7		
						8,396	12,870	118.6	554.4	118.6	554.4	131.27	176.4		

1N=0.102kgf

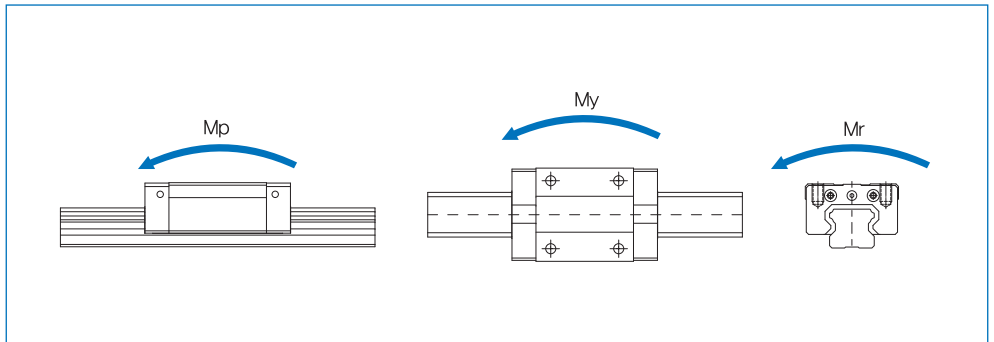


MB Series

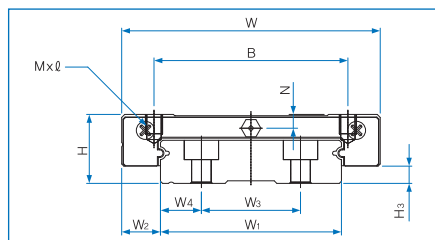

Model No.	External dimensions			Dimensions of block							Grease nipple	H ₃
	Height H	Width W	Length L	B	C	M × ℓ	L ₁	N	E			
MB 5C	6.5	17	21	13	–	M2,5 × 1,5	13,4	1.4	–	–	1.3	
MB 5N			25		–		17,4					
MB 7C	9	25	24	19	–	M3 × 3	12,6	1.7	–	–	2	
MB 7N			33		10		21,6					
MB 7L			43,5		19		32,1					
MB 9C	12	30	28,1	21	–	M3 × 3	16,5	3,2	–	–	3	
MB 9N			40,2		12		28,6					
MB 9L			52	24	40,4							
MB 12C	14	40	31,1	28	–	M3 × 3,5	17,5	3	–	–	4	
MB 12N			44,5		15		30,9					
MB 12L			59,7		28		46,1					
MBT 13C	15	50	35,3	35	–	M4 × 4,5	18,7	3,1	3,3	A–M3	3	
MBT 13N			49,2		18		32,6					
MBT 13L			68,6		35		52					
MB 15C	16	60	42,8	45	–	M4 × 4,5	25,2	3,5	3,3	A–M3	4	
MB 15N			56,6		20		39					
MB 15L			75,8		35		58,2					

※The carbon steel materials based rails for M12 and M15 (MT12, MT15) are reserved. ※As for MBT13, only carbon steel is prepared.

Composition of Model Name & Number



- 1 Model No.
- 2 Material of block : No symbol-Stainless / T-Carbon steel (*1)
- 3 Type of block : C-Short type/ N-Standard type / L-Long type
- 4 No symbol-Standard block / E-Special block specificatio
- 5 Type of seal: UU-End seal / UULF-End seal+ LF seal (*2)
- 6 Number of blocks combined in one axis
- 7 Symbol of clearance: No symbol-Normal preload / G1-Light preload (*3)
- 8 Material of end plate: No symbol-Standard material / I - Stainless / N - Aluminum
- 9 Length of rail
- 10 Material of rail: No symbol-Stainless / T-Carbon steel
- 11 Size of G value: Standard G value has no symbol
- 12 No symbol-Rail counterbore type (top assembly) / A-Rail tap hole type (bottom assembly) (*4)
- 13 Symbol of precision: No symbol-Moderate / H-High / P-Precision (*5)
- 14 No symbol-Standard rail / E-Special rail specification
- 15 Number of axes used in the same plane


(*1) The material of carbon steel is confined to M12-M20

(*2) See Symbol List of Optional parts at page 101

(*3) See Radial Clearance at page 18

(*4) See Standard Tap Hole Type of Rail at page 85


(*5) See Selection of Precision Class at page 22

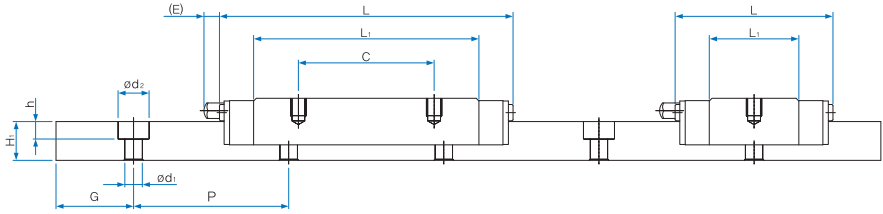


Unit : mm


Width W ₁ ±0.05	Dimensions of rail						Basic load rating		Static allowance moment kN · m					Mass		
	W ₂	W ₃	W ₄	Height H ₁	G	Pitch P	d ₁ x d ₂ x h	C kN	C ₀ kN	M _p		M _y		M _r	Block kg	Rail kg/m
										1 block	Double blocks	1 block	Double blocks	1 block		
10 ⁰ _{-0.025}	3,5	-	-	4	5	20	29x48x1,6	668	1,094	2,6	13,3	2,6	13,3	5,63	5,3	299
								806	1,430	4,4	21,4	4,4	21,4	7,36	6,8	
14 ⁰ _{-0.05}	5,5	-	-	5,5	10	30	3,5x6x3,2	1,102	1,514	3,4	19,5	3,4	19,5	10,83	11,7	560
								1,631	2,650	10,1	51,1	10,1	51,1	18,95	18,9	
								2,166	3,975	22,5	106,1	22,5	106,1	28,42	27,9	
18 ⁰ _{-0.05}	6	-	-	7	10	30	3,5x6x4,5	1,515	2,121	6,2	33,4	6,2	33,4	19,41	23,4	912
								2,197	3,606	18,2	87,6	18,2	87,6	33,00	39,6	
								2,878	5,303	37,8	172,9	37,8	172,9	48,52	54,9	
24 ⁰ _{-0.05}	8	-	-	8,5	15	40	4,5x8x4,5	2,753	3,339	10,3	57,3	10,3	57,3	40,73	40,5	1369
								4,015	5,723	31,2	152,2	31,2	152,2	69,83	68,4	
								5,539	9,062	73,8	338,7	73,8	338,7	110,56	99,9	
30 ⁰ _{-0.05}	10	-	-	9	15	40	4,5x8x4,5	3,694	4,351	14,3	82,8	14,3	82,8	66,1	60,0	2086
								5,457	7,599	43,7	219,3	43,7	219,3	115,5	103,8	
								7,576	12,142	111,5	517,4	111,5	517,4	184,6	165,5	
42 ⁰ _{-0.05}	9	23	9,5	9,5	15	40	4,5x8x4,5	4,954	6,056	26,9	145,3	26,9	145,3	128,40	85,5	2886
								6,579	9,085	62,5	306,5	62,5	306,5	192,60	126,0	
								9,076	14,384	147,8	680,6	147,8	680,6	304,94	183,6	

1N=0,102kgf

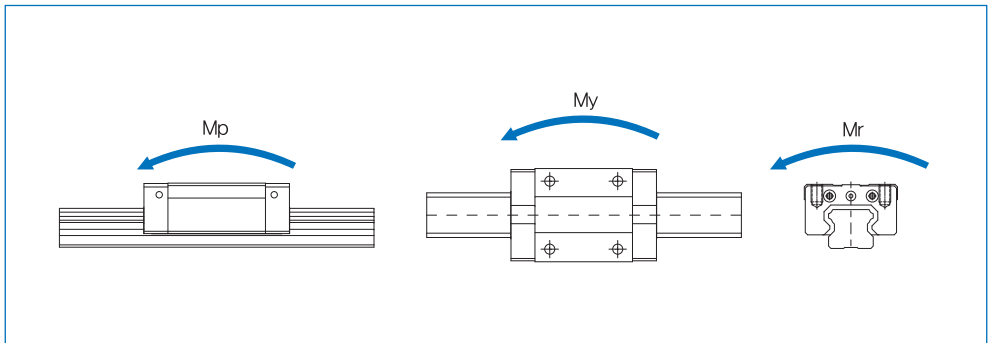

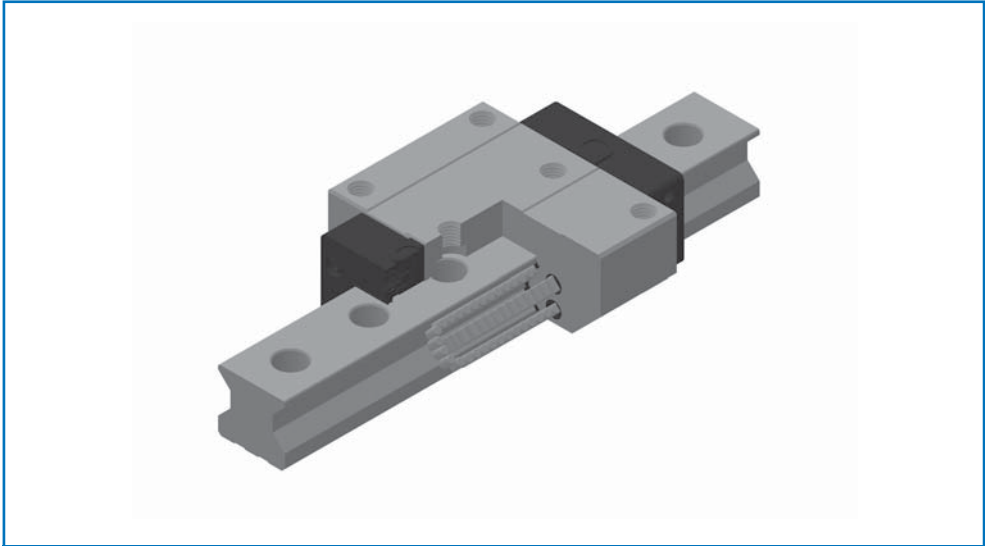


R Series

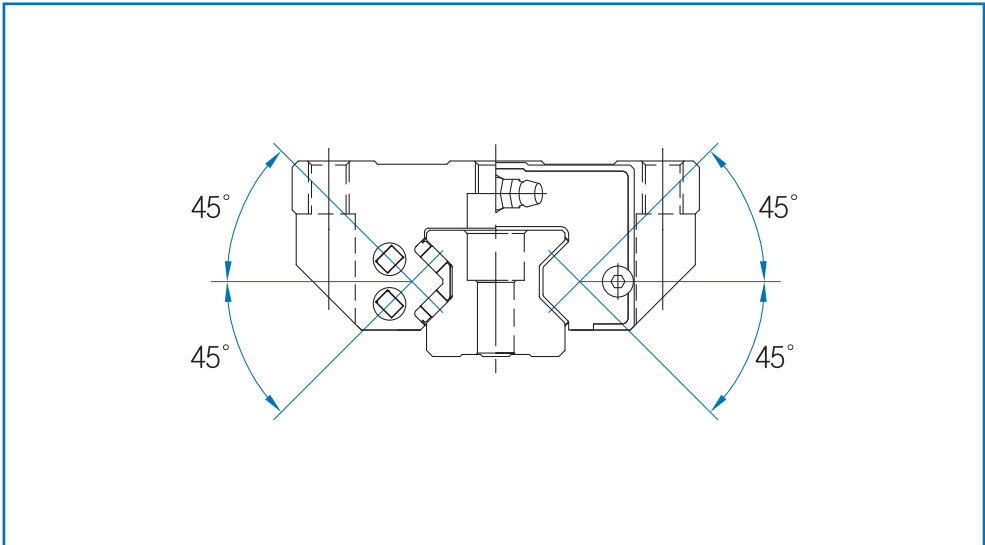

Cross Section

Standard and maximum lengths of rail

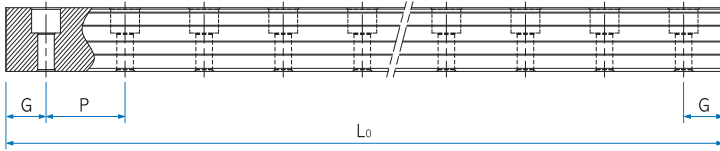

Unit: mm



Model No.	R25	R30	R35	R45	R55	R65
Standard type	220	280	280	570	780	1270
	280	360	360	675	900	1570
	340	440	440	780	1020	1870
	400	520	520	885	1140	2170
	460	600	600	990	1260	2470
	⋮	⋮	⋮	⋮	⋮	2770
	3820	3760	3760	3615	3600	3070
	3880	3840	3840	3720	3720	3670
	3940	3920	3920	3825	3840	3970
4000	4000	4000	3930	3960		
Standard pitch P	30	40	40	52.5	60	75
G	20	20	20	22.5	30	35
Max. length	4000	4000	4000	3930	3960	3970

Standard tap hole type of rail




Model No.	S	h(mm)
R25	M6	12
R30	M8	15
R35	M8	17
R45	M12	24
R55	M14	24
R65	M16	25

R-FN Series, R-FL Series

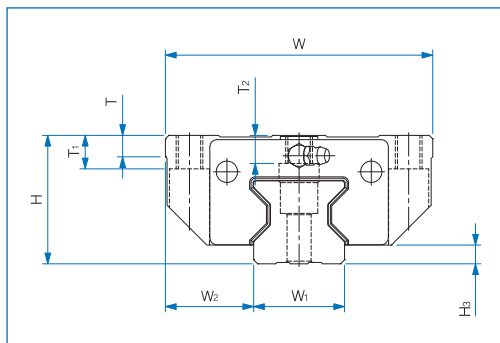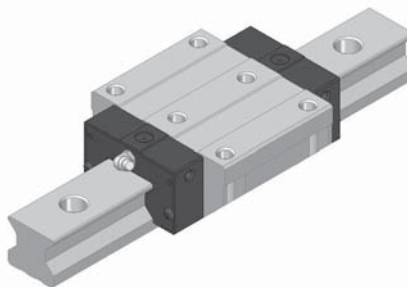

Model No.	External dimensions			Dimensions of block														Grease nipple	H ₃
	HEIGHT H	Width W	Length L	B	C	C ₂	M	L ₁	T	T ₁	T ₂	N	E	θ ₁	N ₁	θ ₂			
R 25FN	36	70	92.2	57	45	40	M8	63.3	7.5	9	6.7	5.5	12	6	5.5	15.2	B-M6F	6.5	
R 25FL			110.2					81.3											24.2
R 30FN	42	90	103.8	72	52	44	M10	71	8	11	8	6.5	12	6	6	16	B-M6F	7	
R 30FL			126.6					93.8											27.4
R 35FN	48	100	118.3	82	62	52	M10	79.5	8	12.5	10.5	7.6	12	12	7.6	16	B-M6F	7	
R 35FL			142.3					103.5											28
R 45FN	60	120	146.3	100	80	60	M12	101.7	10	15	13.5	8	16	12	8	17.9	B-PT1/8	9.5	
R 45FL			178.8					134.2											34.1
R 55FN	70	140	168.6	116	95	70	M14	121.6	12	18	13.4	9	16	13.5	9	21.3	B-PT1/8	10	
R 55FL			207.7					160.7											40.9
R 65FN	90	170	207.2	142	110	82	M16	146.2	15	25	24	13.8	16	18.5	13.8	29.1	B-PT1/8	13	
R 65FL			255.2					194.2											53.1


Composition of Model Name & Number



- 1 Model No.
- 2 Type of block : RN-Rectangular standard type / RL-Rectangular long type / FN-Flange standard type / FL-Flange long type
- 3 No symbol-Standard block / E-Special block specification
- 4 Type of seal : SS-End seal+ Inside seal / ZZ-End seal+ Inside seal+ Metal scraper (*1)
- 5 Number of blocks assembled in one shaft
- 6 Symbol of clearance : No symbol-Normal preload / G₁-Light preload / G₂-Heavy preload / G_s-Special preload (*2)
- 7 Length of rail
- 8 Size of G value: standard G value has no symbol
- 9 No symbol-Rail counterbore type (top assembly) / A- Rail tap hole type (bottom assembly) (*3)
- 10 Symbol of precision : No symbol-Moderate / H-High / P-Precision / SP-Super precision / UP-Ultra precision (*4)
- 11 No symbol-Standard rail / E-special rail specification
- 12 Number of axes used in the same plane

(*1) See Symbol List of Optional Parts at page 101. (*2) See Radial Clearance at page 18.


(*3) See Standard Tap Hole Type of Rail at page 93. (*4) See Selection of Precision Class at page 23.

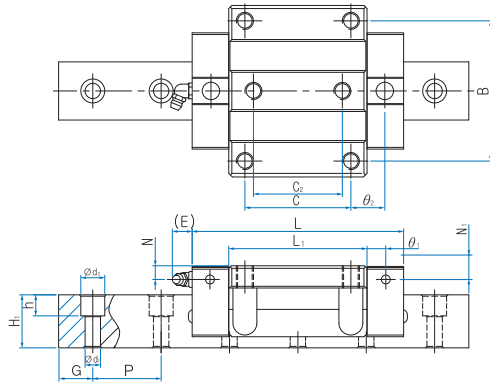



Unit : mm

Dimensions of rail						Basic load rating		Static allowance moment kN · m					Mass	
Width W ₁ ±0.05	W ₂	Height H ₁	G	Pitch P	d ₁ x d ₂ x h	C kN	C ₀ kN	M _p		M _y		M _r	Block kg	Rail kg/m
								1 block	Double blocks	1 block	Double blocks	1 block		
23	23.5	24	20	30	7x11x9.7	29.1	56.2	0.570	3.090	0.570	3.090	0.820	0.8	3.1
						35.6	73.1	0.925	4.949	0.925	4.949	1.065		
28	31	28	20	40	9x14x12	44.4	87.3	0.985	5.395	0.985	5.395	1.470	1.4	4.4
						55.0	114.8	1.640	8.946	1.640	8.946	1.935		
34	33	31	20	40	9x14x12	61.0	114.0	1.460	7.972	1.460	7.972	2.345	2.1	6.2
						75.6	150.0	2.450	13.036	2.450	13.036	3.090		
45	37.5	38	22.5	52.5	14x20x17	103.8	202.0	3.265	17.712	3.265	17.712	5.430	4.0	10.1
						132.3	276.2	5.840	30.565	5.840	30.565	7.440		
53	43.5	43.5	30	60	16x23x20	146.9	278.0	5.390	28.523	5.390	28.523	8.880	6.8	13.4
						181.9	380.3	8.960	49.534	8.960	49.534	11.690		
63	53.5	55	35	75	18x26x22	231.0	450.6	10.600	56.301	10.600	56.301	17.140	13.0	20.1
						303.0	576.0	18.160	91.519	18.160	91.519	21.910		

1N=0.102kgf

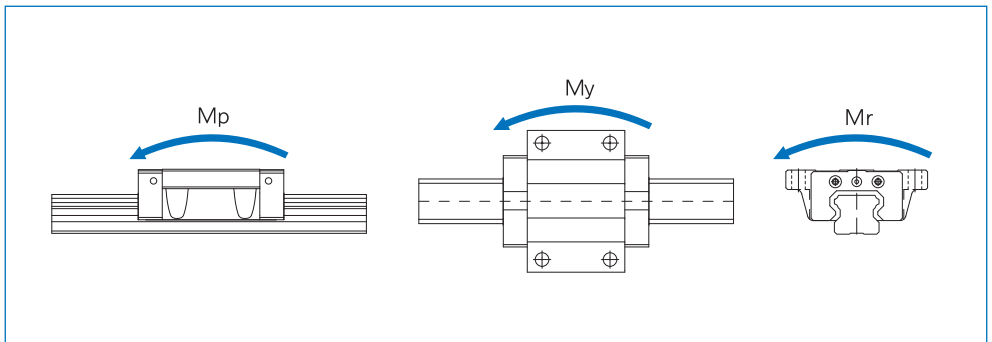


R-RN Series, R-RL Series

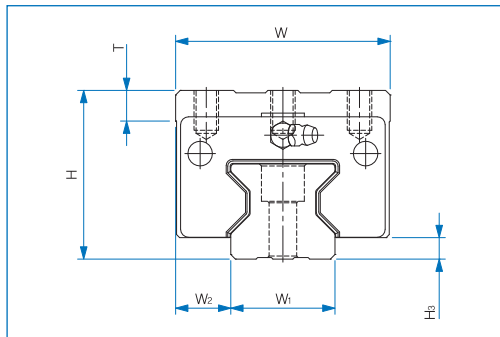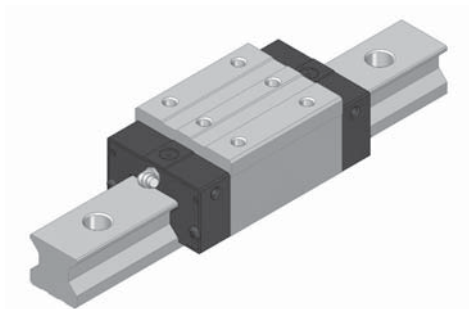

Model No.	External dimensions			Dimensions of block											Grease nipple	H ₃
	Height H	Width W	Length L	B	C	M X ℓ	L ₁	T	N	E	θ ₁	N ₁	θ ₂			
R 25RN	40	48	92.2	35	35	M6 x 9	63.3	9	9.5	12	6	9.5	20.2	B-M6F	6.5	
R 25RL			110.2		50		81.3						21.7			
R 30RN	45	60	103.8	40	40	M8 x 11	71	9	9.5	12	6	9	22	B-M6F	7	
R 30RL			126.6		60		93.8						23.4			
R 35RN	55	70	118.3	50	50	M8 x 13	79.5	12	14.6	12	12	14.6	22	B-M6F	7	
R 35RL			142.3		72		103.5						23			
R 45RN	70	86	146.3	60	60	M10 x 20	101.7	20	18	16	12	18	27.9	B-PT1/8	9.5	
R 45RL			178.8		80		134.2						34.1			
R 55RN	80	100	168.6	75	75	M12 x 19	121.6	20	19	16	13.5	19	31.3	B-PT1/8	10	
R 55RL			207.7		95		160.7						40.9			


Composition of Model Name & Number



- 1 Model No.
- 2 Type of block : RN-Rectangular standard type / RL-Rectangular long type/ FN-Flange standard type / FL-Flange long type
- 3 No symbol-Standard block / E-Special block specification
- 4 Type of seal : SS-End seal+ Inside seal / ZZ-End seal+ Inside seal+ Metal scraper (*1)
- 5 Number of blocks assembled in one shaft
- 6 Symbol of clearance : No symbol-Normal preload / G1-Light preload / G2-Heavy preload / Gs-Special preload (*2)
- 7 Length of rail
- 8 Size of G value: standard G value has no symbol
- 9 No symbol-Rail counterbore type (top assembly) / A- Rail tap hole type (bottom assembly) (*3)
- 10 Symbol of precision : No symbol-Moderate / H-High / P-Precision / SP-Super precision / UP-Ultra precision (*4)
- 11 No symbol-Standard rail / E-special rail specification
- 12 Number of axes used in the same plane

(*1) See Symbol List of Optional Parts at page 101. (*2) See Radial Clearance at page 18.


(*3) See Standard Tap Hole Type of Rail at page 93. (*4) See Selection of Precision Class at page 23.

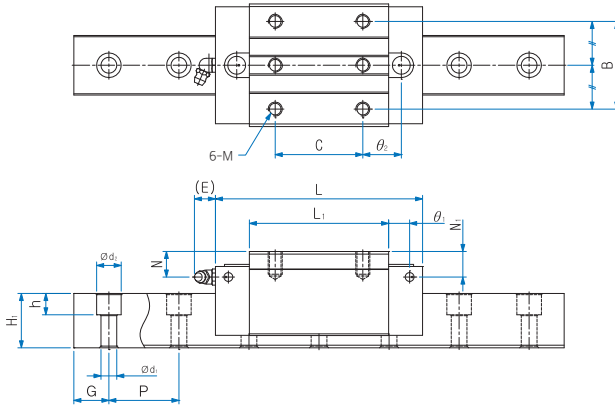



Unit: mm

DIMENSIONS OF RAIL						BASIC LOAD RATING		STATIC ALLOWANCE MOMENT kN · m					MASS	
Width W ₁ ±0.05	W ₂	Height H ₁	G	Pitch P	d ₁ x d ₂ x h	C kN	C ₀ kN	M _p		M _y		M _r	Block kg	Rail kg/m
								1 block	Double blocks	1 block	Double blocks	1 block		
23	12.5	24	20	30	7x11x9.7	29.1	56.2	0.570	3.090	0.570	3.090	0.820	0.7	3.1
						35.6	73.1	0.925	4.949	0.925	4.949	1.065	0.9	
28	16	28	20	40	9x14x12	44.4	87.3	0.985	5.395	0.985	5.395	1.470	1.2	4.4
						55.0	114.8	1.640	8.946	1.640	8.946	1.935	1.5	
34	18	31	20	40	9x14x12	61.0	114.0	1.460	7.972	1.460	7.972	2.345	2.0	6.2
						75.6	150.0	2.450	13.036	2.450	13.036	3.090	2.5	
45	20.5	38	22.5	52.5	14x20x17	103.8	202.0	3.265	17.712	3.265	17.712	5.430	3.9	10.1
						132.3	276.2	5.840	30.565	5.840	30.565	7.440	5.0	
53	23.5	43.5	30	60	16x23x20	146.9	278.0	5.390	28.523	5.390	28.523	8.880	6.2	13.4
						181.9	380.3	8.960	49.534	8.960	49.534	11.690	8.1	

1N=0.102kgf

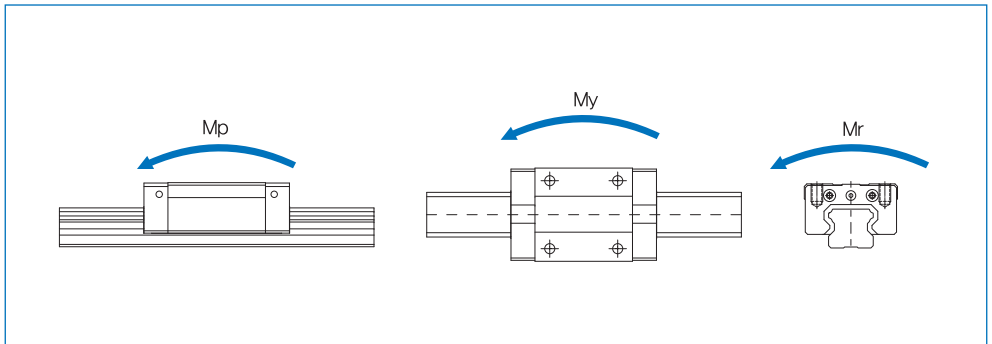


RS-RN Series, RS-RL Series

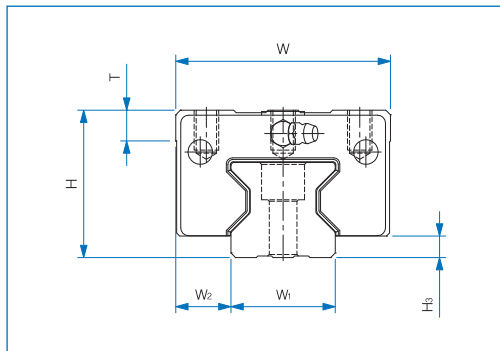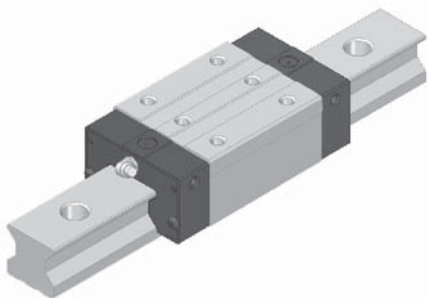

Model No.	External dimensions			Dimensions of block											Grease nipple	H ₃
	Height H	Width W	Length L	B	C	M X ℓ	L ₁	T	N	E	θ_1	N ₁	θ_2			
RS 25RN	36	48	92.2	35	35	M6 x 9	63.3	9	5.5	12	6	5.5	20.2	B-M6F	6.5	
RS 25RL			110.2		50		81.3						21.7			
RS 35RN	48	70	118.3	50	50	M8 x 12	79.5	12	7.6	12	12	7.6	22	B-M6F	7	
RS 35RL			142.3		72		103.5						23			
RS 45RN	60	86	146.3	60	60	M10 x 18	101.7	20	8	16	12	8	27.9	B-PT1/8	9.5	
RS 45RL			178.8		80		134.2						34.1			
RS 55RN	70	100	168.6	75	75	M12 x 19	121.6	20	9	16	13.5	9	31.3	B-PT1/8	10	
RS 55RL			207.7		95		160.7						40.9			
RS 65RN	90	126	207.2	76	70	M16 x 21	146.2	20	13.8	16	18.5	13.8	49.1	B-PT1/8	13	
RS 65RL			255.2		120		194.2						48.1			


Composition of Model Name & Number



- 1 Model No.
- 2 Type of block : RN-Rectangular standard type / RL-Rectangular long type
- 3 No symbol-Standard block / E-Special block specification
- 4 Type of seal : SS-End seal+ Inside seal / ZZ-End seal+ Inside seal+ Metal scraper (*1)
- 5 Number of blocks assembled in one shaft
- 6 Symbol of clearance : No symbol-Normal preload / G₁-Light preload / G₂-Heavy preload / G_s-Special preload (*2)
- 7 Length of rail
- 8 Size of G value: standard G value has no symbol
- 9 No symbol-Rail counterbore type (top assembly) / A- Rail tap hole type (bottom assembly) (*3)
- 10 Symbol of precision : No symbol-Moderate / H-High / P-Precision / SP-Super precision / UP-Ultra precision (*4)
- 11 No symbol-Standard rail / E-special rail specification
- 12 Number of axes used in the same plane

(*1) See Symbol List of Optional Parts at page 101. (*2) See Radial Clearance at page 18.


(*3) See Standard Tap Hole Type of Rail at page 93. (*4) See Selection of Precision Class at page 23.

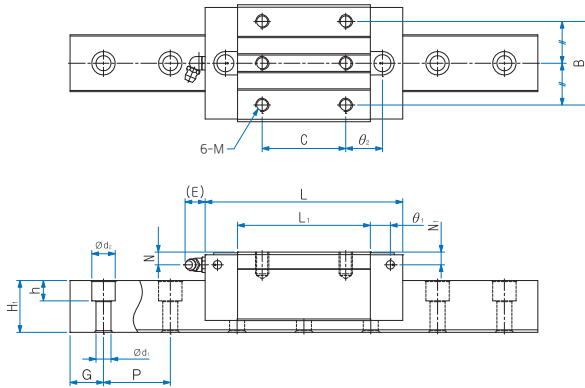

Unit : mm







Dimensions of rail						Basic load rating		STATIC ALLOWANCE MOMENT kN · m					Mass	
Width W_1 ± 0.05	W_2	Height H_1	G	Pitch P	$d_1 \times d_2 \times h$	C kN	C_0 kN	M_p		M_y		M_r	Block kg	Rail kg/m
								1 block	Double blocks	1 block	Double blocks	1 block		
23	12.5	24	20	30	7x11x9.7	29.1	56.2	0.570	3.090	0.570	3.090	0.820	0.6	3.1
						35.6	73.1	0.925	4.949	0.925	4.949	1.065	0.8	
34	18	31	20	40	9x14x12	61.0	114.0	1.460	7.972	1.460	7.972	2.345	1.7	6.2
						75.6	150.0	2.450	13.036	2.450	13.036	3.090	2.1	
45	20.5	38	22.5	52.5	14x20x17	103.8	202.0	3.265	17.712	3.265	17.712	5.430	3.2	10.1
						132.3	276.2	5.840	30.565	5.840	30.565	7.440	4.2	
53	23.5	43.5	30	60	16x23x20	146.9	278.0	5.390	28.523	5.390	28.523	8.880	5.3	13.4
						181.9	380.3	8.960	49.534	8.960	49.534	11.690	6.8	
63	31.5	55	35	75	18x26x22	231.0	450.6	5.390	34.735	5.390	34.735	8.880	30.4	20.1
						303.0	576.0	8.960	60.425	8.960	60.425	11.690	33.6	

1N=0.102kgf

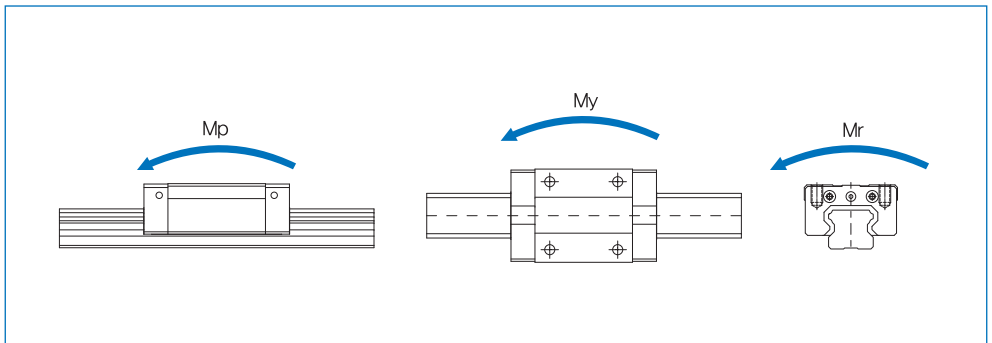


13 Options

1. Seal and rail cap

Item	Seal attachment position	Applied environments
End seal	 <p>End seal</p>	<ul style="list-style-type: none"> • Where there is a lot of dust or particles
Side seal	 <p>Side seal</p>	<ul style="list-style-type: none"> • Where foreign substance can easily flow in from the flank or bottom • Where the assembled linear motion guide moves in a vertical, horizontal, or reverse direction
Inner seal	 <p>Inner seal</p>	<ul style="list-style-type: none"> • Where there are a lot of cutting chips or foreign substance • Where cutting chips or foreign substances are highly likely to flow into a block
LF seal	 <p>End seal LF seal LF seal cover</p>	<ul style="list-style-type: none"> • Where a long interval of refilling is needed due to a narrow space • An environment at 40°C or so • Where there needs to avoid any contact with organic solvents, such as thinner or milky white oil
Double seal	 <p>End seal End seal Spacer</p>	<ul style="list-style-type: none"> • Where strong sealing is needed due to a lot of dust or cutting chips
Metal scraper	 <p>Metal scraper</p>	<ul style="list-style-type: none"> • Where spatters, such as slag or metal powder, arise in welding

Symbol List of Optional Parts

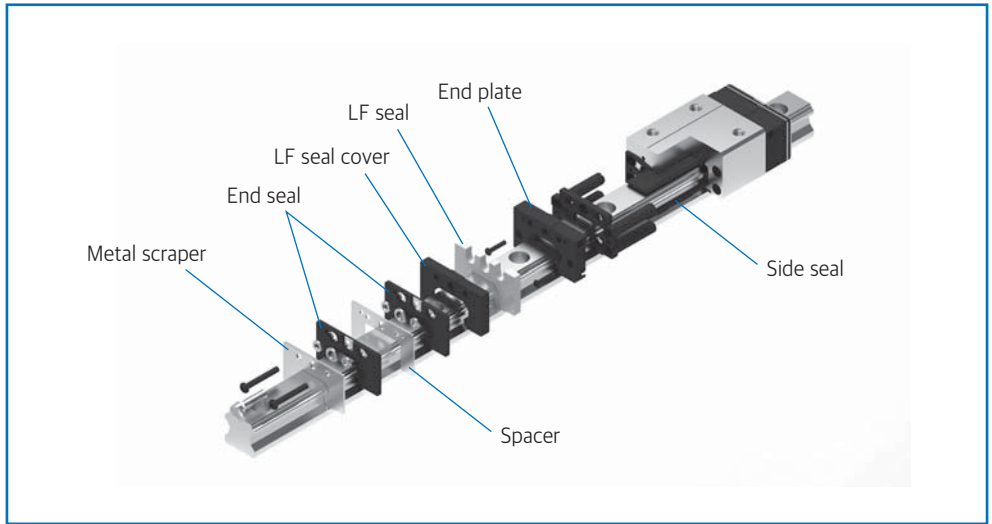

Symbol	Optional parts
UU	End seal
SS	Side seal+ Inner seal + End seal
DD	Side seal+ Inner seal + End seal+ Spacer+ End seal
ZZ	Side seal+ Inner seal + End seal+ Metal scraper
KK	Side seal+ Inner seal + End seal+ Spacer+ End seal+ Metal scraper
UUUF	LF Unit+ End seal
SSLF	Side seal+ Inner seal + LF Unit+ End seal
DDLDF	Side seal+ Inner seal + LF Unit+ End seal+ Spacer+ End seal
ZZLF	Side seal+ Inner seal + LF Unit+ End seal+ Metal scraper
KKLF	Side seal+ Inner seal + LF Unit+ End seal+ Spacer+ End seal+ Metal scraper

Optional-parts mapping table by model number


Model No.		Full ball type								Spacer ball chain type					Full roller type	
		H		HB	S		HS		M	MB	H...S		HS...S		S...S	R
		15~25	30~55	17~35	15~25	25	30~35	5~20	5~15	15~25	30~35	25	30~35	15~25	25~65	
End seal	UU	○	○	○	○	○	○	○	○	○	○	○	○	○		
Side seal	-	○	○*1)	-	○	○	○*1)	-	-	○	○*1)	○	○*1)	○	-	
Inner seal	-	○	○	-	○	○	○	-	-	○	○	○	○	○	-	
Side seal +Inner seal +End seal	SS	○	○	○*2)	○	○	○	-	-	○	○	○	○	○	○*2)	
Side seal +Inner seal +End seal +Metal scraper	ZZ	○	○	○	○	○	○	-	-	○	○	○	○	○	○*3)	
Side seal +Inner seal +Double seal	DD	○	○	○	○	○	○	-	-	○	○	○	○	○	○*3)	
Side seal +Inner seal +End seal +Metal scraper	KK	○	○	○	○	○	○	-	-	○	○	○	○	○	○*3)	
LF seal +End seal	UULF	○	○	○	○	○	○	○	○	○	○	○	○	○	○*3)	
LF seal +Side seal +Inner seal +End seal	SSLF	○	○	○	○	○	○	-	-	○	○	○	○	○	○*3)	
LF seal +Side seal +Inner seal +Double seal	DDLFL	○	○	○	○	○	○	-	-	○	○	○	○	○	○*3)	
LF seal +Side seal +Inner seal +End seal +Metal scraper	ZZLF	○	○	○	○	○	○	-	-	○	○	○	○	○	○*3)	
LF seal +Side seal +Inner seal +Double seal +Metal scraper	KKLF	○	○	-	○	○	○	-	-	○	○	○	○	○	○*3)	

*1) In H,HS, H...S, and HS...S Series, the basic optional part of model no. 30 and no. 35 is Inner Seal.

*2) In H Series (model no. 45 and no. 55) and HB Series and R Series, Side Seal and Inner Seal is an integral type.

*3) In R Series, if it is necessary to apply LF seal and metal scraper, please contact us.

Dimension Table of the Installation of Optional Parts

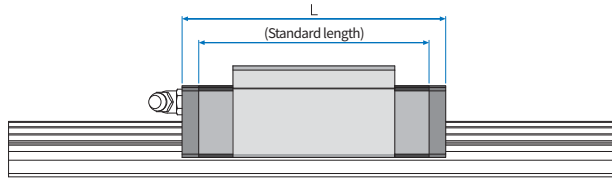

Unit: mm

	Model No.	L									
		UU	SS	ZZ	DD	KK	UULF	SSLF	DDLf	ZZLF	KKLF
H	15 FN/RN/FN...S/RN...S	56.5	56.5	60.7	61.5	65.7	70.5	70.5	75.5	74.7	79.7
	15 FL/RL/FL...S/RL...S	64.8	64.8	69	69.8	74	78.8	78.8	83.8	83	88
	20 FN/RN/FN...S/RN...S	73.2	73.2	78.2	79.4	84.4	87.2	87.2	93.4	92.2	98.4
	20 FL/RL/FL...S/RL...S	89.1	89.1	94.1	95.3	100.3	103.1	103.1	109.3	108.1	114.3
	25 FN/RN/FN...S/RN...S	83.2	93.2	89.2	90.4	96.4	97.2	97.2	104.4	103.2	110.4
	25 FL/RL/FL...S/RL...S	103.1	103.1	109.1	110.3	116.3	117.1	117.1	124.3	123.1	130.3
	30 FN/RN/FN...S/RN...S	99.3	99.3	105.3	106.5	112.5	113.3	113.3	120.5	119.3	126.5
	30 FL/RL/FL...S/RL...S	121.5	121.5	127.5	128.7	134.7	135.5	135.5	142.7	141.5	148.7
	35 FN/RN/FN...S/RN...S	111.8	111.8	117.8	119	125	125.8	125.8	133	131.8	139
	35 FL/RL/FL...S/RL...S	137.2	137.2	143.2	144.4	150.4	151.2	151.2	158.4	157.2	164.4
	45 FN/RN/FN...S/RN...S	139	139	148.9	-	-	154	154	-	163.9	-
	45 FL/RL/FL...S/RL...S	170.8	170.8	180.7	-	-	185.8	185.8	-	195.7	-
55 FN/RN/FN...S/RN...S	163	163	172.9	-	-	179	179	-	188.9	-	
55 FL/RL/FL...S/RL...S	201.1	201.1	211	-	-	217.1	217.1	-	227	-	
HB	17 F/R	51	51	54.6	-	-	61.2	61.2	-	64.8	-
	21 F/R	59	59	63.4	-	-	69.2	69.2	-	73.6	-
	27 F/R	72.5	72.5	76.9	-	-	85.1	85.1	-	89.5	-
	35 F/R	105.3	105.3	110.9	-	-	120.3	120.3	-	125.9	-
S	15 FC/RC/FC...S/RC...S	39.8	39.8	44	44.8	49	53.8	53.8	58.8	58	63
	15 FN/RN/FN...S/RN...S	56.5	56.5	60.7	61.5	65.7	70.5	70.5	75.5	74.7	79.7
	20 FC/RC/FC...S/RC...S	47.8	47.8	52.8	54	59	61.8	61.8	68	66.8	73
	20 FN/RN/FN...S/RN...S	66.8	66.8	71.8	73	78	80.8	80.8	87	85.8	92
	25 FC/RC/FC...S/RC...S	59.4	59.4	65.4	66.6	72.6	73.4	73.4	80.6	79.4	86.6
25 FN/RN/FN...S/RN...S	83.2	83.2	89.2	90.4	96.4	97.2	97.2	104.4	103.2	110.4	
HS	25 RN/RN...S	83.2	83.2	89.2	90.4	96.4	97.2	97.2	104.4	103.2	110.4
	25 RL/RL...S	103.1	103.1	109.1	110.3	116.3	117.1	117.1	124.3	123.1	130.3
	30 RN/RN...S	99.3	99.3	105.3	106.5	112.5	113.3	113.3	120.5	119.3	126.5
	30 RL/RL...S	121.5	121.5	127.5	128.7	134.7	135.5	135.5	142.7	141.5	148.7
	35 RN/RN...S	111.8	111.8	117.8	119	125	125.8	125.8	133	131.8	139
	35 RL/RL...S	137.2	137.2	143.2	144.4	150.4	151.2	151.2	158.4	157.2	164.4

Unit: mm


	Model No.	L	
		UU	UULF
M	5 C	17	21.4
	5 N/NA	20	24.4
	7 C	19.8	24.8
	7 N	24.3	29.3
	7 L/LA	31.8	36.8
	9 C	22.4	27.4
	9 N	31.3	36.3
	9 L/LA	41.4	46.4
	12 C	26.4	32.4
	12 N	34.9	40.9
	12 L	45.4	51.4
	15 C	34.4	41.4
	15 N	44.4	51.4
	15 L	59.4	66.4
	20 C	39.8	46.8
	20 N	51.8	58.8
20 L	69.8	76.8	

Unit: mm

	Model No.	L	
		UU	UULF
MB	5C	21	25.4
	5N	25	29.4
	7C	24	29
	7N	33	38
	7L	43.5	48.5
	9C	28.1	33.1
	9N	40.2	45.2
	9L	52	57
	12C	31.1	37.1
	12N	44.5	50.5
	12L	59.7	65.7
	13C	35.3	42.3
	13N	49.2	56.2
	13L	68.6	75.6
	15C	42.8	49.8
	15N	56.6	63.6
15L	75.8	82.8	

2. Oil inlet

In R Series, it is possible to refill on the side and top. The standard specification of an oil inlet is 'not run through', in order to prevent foreign substances from flowing in a block. For use, please contact WON ST

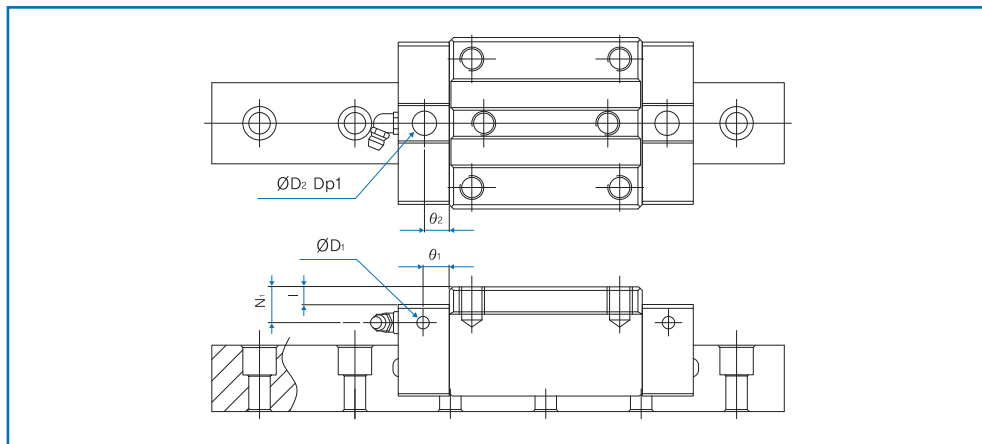

Unit : mm

Model No.	Hole for a side nipple			Top oil inlet				
	θ_1	N_1	D_1	D_2	(O-ring)	l	θ_2	
R	25F(L)	6	5.5	3.3	10.2	P7	0.4	6
	30F(L)	6	6	5.1	10.2	P7	0.4	6.5
	35F(L)	12	7.6	5.1	10.2	P7	0.4	7.25
	45F(L)	12	8	5.1	10.2	P7	0.4	7
	55F(L)	13.5	9	5.1	10.2	P7	0.4	8
	65F(L)	18.5	13.75	5.4	10.2	P7	0.4	11
	25R(L)	6	9.5	3.3	10.2	P7	4.4	6
	30R(L)	6	9	5.1	10.2	P7	3.4	6.5
	35R(L)	12	14.6	5.1	10.2	P7	7.4	7.25
	45R(L)	12	18	5.1	10.2	P7	10.4	7
RS	55R(L)	13.5	19	5.1	10.2	P7	10.4	8
	25R(L)	6	5.5	3.3	10.2	P7	0.4	6
	35R(L)	12	7.6	5.1	10.2	P7	0.4	7.25
	45R(L)	12	8	5.1	10.2	P7	0.4	7
	55R(L)	13.5	9	5.1	10.2	P7	0.4	8
65R(L)	18.5	13.75	5.4	10.2	P7	0.4	11	

3. Grease nipple


WON ST provides various types of grease nipples necessary for lubricating a linear motion system.

A-Ø3	A-M3	A-M5	B-M6F	B-PT1/8
HW 17, 21	M 15, 20 MB 13, 15	H 15 S 15	H 20, 25, 30, 35 HW 27, 35 S 20, 25	H 45, 55


Applied model no.	Nipple model no.	Thread (L) length									
		UU	SS	DD	ZZ	KK	UULF	SSLF	DDLf	ZZLF	KKLF
HB17, HB21	A-Ø3	4	4	-	6.5	-	9	9	-	11	-
M15, M20, MB13, MB15	A-M3	4.2	4.2	-	-	-	7.7	7.7	-	-	-
S-H15	A-M5	5	5	7.5	7.5	10	12	12	14.5	14.5	17
S-H20	B-M6F	7	7	10	10	12	14.5	14.5	17	17	19
S-H25		7	7	10	10	14.5	14.5	14.5	17	17	22
H30		7	7	12	12	14.5	14.5	14.5	19	19	22
H35		10	10	14.5	14.5	17	17	17	19	19	22
HB27		5	5	-	7	-	12	12	-	14.5	-
HB35		5	5	-	10	-	12	12	-	17	-
H45, H55	B-PT 1/8	8	8	-	11	-	15.5	15.5	-	18	-

4. Connection of oil pipes


WOL Type




WOL-A




WOL-B



WOL-C




WOL-D




WOL-E


WOSType




WOS-A



WOS-B



WOS-C



WOS-D


Applied model no.	Nipple model no.	Thread (L) length											
		UU	SS	DD	ZZ	KK	UULF	SSLF	DDLf	ZZLf	KKLf		
S-H15	WOL-E	5	5	7.5	7.5	10	12	12	14.5	14.5	17	17	19
S-H20	WOS-B	7	7	10	10	12	14.5	14.5	17	17	19	19	22
S-H25	WOL-A, WOL-B WOS-A, WOS-B	7	7	10	10	14.5	14.5	14.5	17	17	19	19	22
H30		7	7	12	12	14.5	14.5	14.5	19	19	19	22	22
H35		10	10	14.5	14.5	17	17	17	19	19	19	22	22
HB27		5	5	-	7	-	12	12	-	14.5	-	-	-
HB35	5	5	-	10	-	12	12	-	17	-	-	-	
H45, H55	WOL-C, WOL-D WOS-C, WOS-D	8	8	-	11	-	15.5	15.5	-	18	-	-	-

5. How to install with the use of a support rail

To get a block of a linear motion guide in or out of a rail, it is required to use a support rail for safety. If a rail is mounted on a rail without any support rail, a rolling element can be separated from the block. Moreover, internal parts can be damaged or destroyed by foreign substances.

Installing a block without a rolling element may sharply shorten life of the block, reduce load, and cause early destruction.

If you use a support rail, do not lean it. Adhere it to the end of a rail first and then push it in the rail direction by apply force gradually. If a block has a rolling element separated and gets contaminated by dust, please do not use the product but contact WON ST.

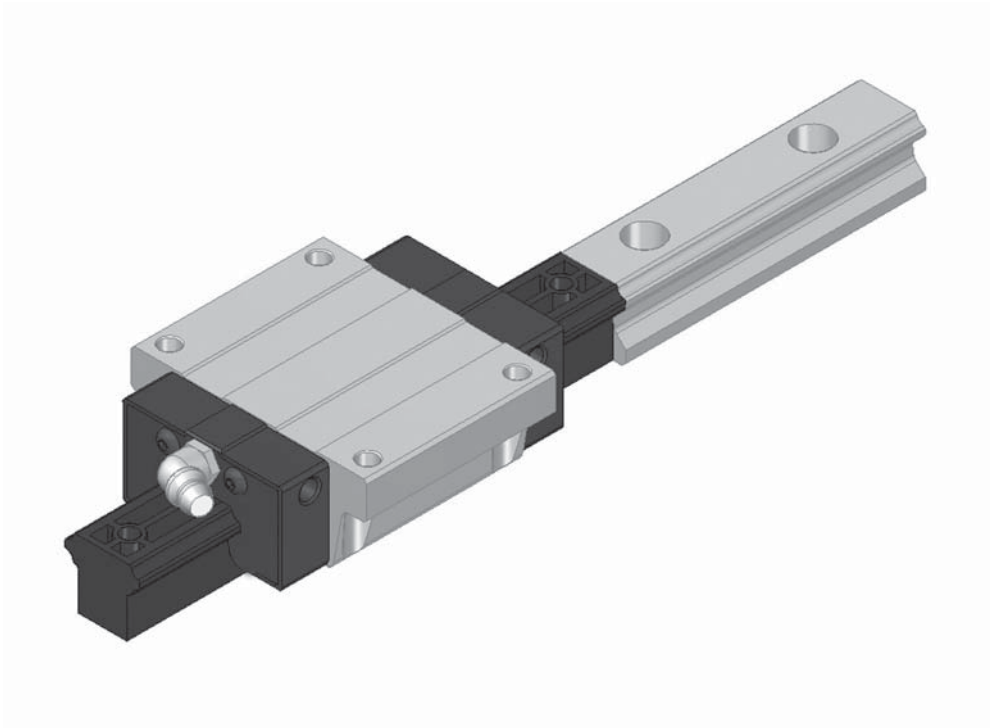

14 Precautions for Handling Linear Motion Guide

1. Handling

- 1) WON Linear Motion Guide is damp-proof packaged after grease removal and cleaning. So, please open it right before use.
- 2) As for the compatible product of rail and block, a plastic support rail is combined with the block. Please assemble it with the rail carefully.
- 3) If you reassemble a block-rail set product or a single block product after dismantling it into pieces, foreign substance may intrude into the block or cause performance degradation that leads to unsmooth rolling motion or damage. So please do not disassemble it at your discretion.
- 4) If either a rail or a block leans to one side, the block or rail may fall to be damaged. Please be careful not to get a block or rail separated.
- 5) A block' end plate is made of plastic. Imposing an impact on it may cause its damage. Please be careful

2. Lubrication

- 1) If the product supplied is coated with rust preventive oil, clean it off thoroughly first and then fill with a lubricant before use.
- 2) DO NOT mix with other lubricants with a different thickener or additive. If so, it may destroy the structure of grease or cause a harmful effect.
- 3) Viscosity of grease depends on temperature. It increases in winter due to low temperature, and friction of a linear motion guide resistance may increase.
- 4) If you need to use a special lubricant, please contact WON ST before use.
- 5) When you use oil as a lubricant, oil may fail to reach the raceway groove depending on the assembly status or direction of a block or rail. In this case, there is no lubrication effect. WON ST offers different lubrication methods suitable for assembly environments. So please contact us.

3. Caution for use

- 1) After opening the product, please put a damp-proof agent in a dry container for storage.
- 2) Please handle the product after wearing plastic gloves in a clean place.
- 3) Please be careful to prevent foreign substances that may impede rolling motion or cause functional damage.
- 4) Please use a holding door or cover to prevent a linear motion guide from being exposed directly to poor environments that may cause corrosion or damage.
- 5) As for the linear motion guide based on standard plastic end plate, use it at 80°C or below. If you need to use it at 80°C or above, please order a special metal end plate.
- 6) If rail of a linear motion guide is fixed at ceiling or in a high place and its block bears load downwards, it is possible for the block to be separated from the rail and for the block and its attached parts to fall as the end plate is damaged or a ball falls off. So, it is required to take safety measures, such as the installation of a safety device.

4. Storage

A rail may warp depending on a storage condition. For storage, place a linear motion guide horizontally in the package box offered by WON ST or its equivalent box with the flat bottom. Avoid a place with high or low temperature and high humidity.

Troubles and Troubleshooting of Linear Motion Guide

Type	Trouble	Cause	Action
Fatigue failure of the rolling surface	<ul style="list-style-type: none"> • Flaking - Caused by rolling fatigue of the rolling surface - Maximum shear stress-induced internal cracks are expressed on the surface. 	Damage by life	Replace the linear motion guide.
		Overload	Review the model no. selected; Use a higher model no.; Lower a level of load; Reinforce assembly precision for installation; Enhance the rigidity of base and table
		Poor lubrication	Refill a lubricant; Shorten a refilling cycle of lubricant; Review the lubricant in use; Improve the lubricant passage.
		Intrusion of foreign substances	Improve seal performance; Add a seal; Take additional measures for dust prevention.
Indentation of the rolling surface	<ul style="list-style-type: none"> • Indentation - Caused by plastic deformation of the rolling surface due to excessive external load 	Impact load or excessive external load	Review the model no. selected; Make service conditions less strict; Lower a level of load; Reinforce assembly precision for installation; Use a higher model no.
		Careless handling	Improve the methods and conditions of handling to prevent impact and fall.
Seizing	<ul style="list-style-type: none"> • Burning - Rough surface of the rolling surface due to slight burning by friction between a rolling element and the rolling surface - Cause for the discoloration of the rolling surface, weakened hardness, and flaking 	Poor lubrication	Refill a lubricant; Use an appropriate lubricant; Improve lubrication
		Overload	Review service conditions; Lower a level of load; Use a higher model no.; Enhance assembly precision for installation.
Cracking	<ul style="list-style-type: none"> • Cracking - Partial breaking into pieces of a rolling element or rolling surface due to excessive external load 	Impact load or excessive external load	Review the model no. selected; Use a higher model no.; Lower a level of load; Reinforce assembly precision for installation
		Poor raceway circulation of a rolling element	Prevent foreign substances; Improve measures for dust prevention; Refill a lubricant; Shorten a refilling cycle of lubricant; Improve lubrication
Abnormal wear	<ul style="list-style-type: none"> • Abnormal wear - Caused by the sliding of a rolling element and the rolling surface; the more sliding, the rapidly more wear - Accompany oxidation wear causing poor precision and preload failure 	Impact load or excessive external load	Review the model no. selected; Use a higher model no.; Lower a level of load; Reinforce assembly precision for installation.
		Intrusion of foreign substances	Reinforce seal performance; Improve measures for dust prevention
		Poor lubrication	Refill a lubricant; Use an appropriate lubricant; Improve lubrication; Improve the lubrication passage.
Flattening corrosion	<ul style="list-style-type: none"> • Vibration - This problem arises when running at vibrant stroke causes the loss of oil film, and the oxidation of the fine dust caused by the sliding of a rolling element and the rolling surface facilitates wear. 	Load	Review service conditions; Use a higher model no.; Reinforce assembly precision for installation.
		Vibration	Improve transfer conditions; Replace a lubricant; Improve lubrication; Shorten a refilling cycle of lubricant.
		Intrusion of foreign substances	Improve a seal; Establish measures for dust prevention.
Rust generation	<ul style="list-style-type: none"> • Rust - Caused by the loss of oil film or the contact of an exposed part with water, acid, and alkali. In particular, when cooling water flows in a block, it degrades lubrication and causes rust. Early flaking arises due to concentrated stress. 	Intrusion of cooling water	Apply surface treatment for rust prevention; Improve seal performance; Replace a lubricant; replace a coolant; Refill a lubricant; Shorten a refilling cycle of lubricant.
		High humidity	Apply surface treatment for rust prevention; Improve environments.
		Poor handling	Improve a storage place; Reinforce sealing treatment; Apply a sufficient amount of rust preventive oil.

<Table of comparison with the full ball type products made by different manufacturers>

1. H Series (Standard Type)

WON	THK	NSK	PMI	HIWIN
H 15FN H 15FL	HSR 15A, B, C HSR 15LC	LH 15EL, EM LH 15GL, GM	MSA 15A	HGW 15CA
H 20FN H 20FL	HSR 20A, B, C HSR 20LA, LB, LC	LH 20EL, EM LH 20GL, GM	MSA 20A MSA 20LA	HGW 20CA HGW 20HA
H 25FN H 25FL	HSR 25A, B, C HSR 25LA, LB, LC	LH 25EL, EM LH 25GL, GM	MSA 25A MSA 25LA	HGW 25CA HGW 25HA
H 30FN H 30FL	HSR 30A, B, C HSR 30LA, LB, LC	LH 30EL, EM LH 30GL, GM	MSA 30A MSA 30LA	HGW 30CA HGW 30HA
H 35FN H 35FL	HSR 35A, B, C HSR 35LA, LB, LC	LH 35EL, EM LH 35GL, GM	MSA 35A MSA 35LA	HGW 35CA HGW 35HA
H 45FN H 45FL	HSR 45A, B, C HSR 45LA, LB, LC	LH 45EL, EM LH 45GL, GM	MSA 45A MSA 45LA	HGW 45CA HGW 45HA
H 55FN H 55FL	HSR 55A, B, C HSR 55LA, LB, LC	LH 55EL, EM LH 55GL, GM	MSA 55A MSA 55LA	HGW 55CA HGW 55HA
H 15RN H 15RL	HSR 15R HSR 15LR	LH 15AN, AL LH 15BL, BL	MSA 15S	HGH 15CA
H 20RN H 20RL	HSR 20R HSR 20LR	LH 20AN, AL LH 20BN, BL	MSA 20S MSA 20LS	HGH 20CA HGH 20HA
H 25RN H 25RL	HSR 25R HSR 25LR	LH 25AN, AL LH 25BN, BL	MSA 25S MSA 25LS	HGH 25CA HGH 25HA
H 30RN H 30RL	HSR 30R HSR 30LR	LH 30AN, AL LH 30BN, BL	MSA 30S MSA 30LS	HGH 30CA HGH 30HA
H 35RN H 35RL	HSR 35R HSR 35LR	LH 35AN, AL LH 35BN, BL	MSA 35S MSA 35LS	HGH 35CA HGH 35HA
H 45RN H 45RL	HSR 45R HSR 45LR	LH 45AN, AL LH 45BN, BL	MSA 45S MSA 45LS	HGH 45CA HGH 45HA
H 55RN H 55RL	HSR 55R HSR 55LR	LH 55AN, AL LH 55BN, BL	MSA 55S MSA 55LS	HGH 55CA HGH 55HA

2. HW Series (Wide Type)

WON	THK	NSK	PMI	HIWIN	IKO
HB 17F	HRW 17CA	LW 17EL	-	WEW 17CC	LWFF 33
HB 21F	HRW 21CA	LW 21EL	MSG 21E	WEW 21CC	LWFF 37
HB 27F	HRW 27CA	LW 27EL	MSG 27E	WEW 27CC	LWFF 42
HB 35F	HRW 35CA	LW 35EL	MSG 35E	WEW 35CC	LWFF 69
HB 17R	HRW 17CR	-	-	WEH 17CA	LWFS 33
HB 21R	HRW 21CR	-	MSG 21S	WEH 21CA	LWFS 37
HB 27R	HRW 27CR	-	MSG 27S	WEH 27CA	LWFS 42
HB 35R	HRW 35CR	-	MSG 35S	WEH 35CA	-

S Series (Slim Type)

WON	THK	NSK	PMI	HIWIN
S 15RC S 15RN	SR 15V SR 15W	LS 15CL LS 15AL	MSB 15TS MSB 15S	EGH 15SA EGH 15CA
S 20RC S 20RN	SR 20V SR 20W	LS 20CL LS 20AL	MSB 20TS MSB 20S	EGH 20SA EGH 20CA
S 20RC S 20RN	SR 25V SR 25W	LS 25CL LS 25AL	MSB 25TS MSB 25S	EGH 25SA EGH 25CA
S 15FC S 15FN	SR 15SB SR 15TB	LS 15EM LS 15JM	MSB 15TE MSB 15E	EGW 15CA EGW 15CB
S 20FC S 20FN	SR 20SB SR 20TB	LS 20EM LS 20JM	MSB 20TE MSB 20E	EGW 20CA EGW 20CB
S 20FC S 20FN	SR 25SB SR 25TB	LS 25EM LS 25JM	MSB 25TE MSB 25E	EGW 25CA EGW 25CB

4. M Series (Miniature Standard Type)

WON	THK	NSK	PMI	HIWIN	IKO
M 5C M 5N	SRS 5GM SRS 5GN	- LU 05TL	- -	MGN 5C -	LWLC 5 LWL 5
M 7C M 7N M 7L M 7LA	SRS 7GS SRS 7GM SRS 7GN -	- LU 07AL - -	- MSC 7M MSC 7LM -	- MGN 7C MGN 7H -	LWLC 7 LWL 7 - LWLG 7
M 9C M 9N M 9L M 9LA	SRS 9GS SRS 9GM SRS 9GN -	- LU 09TL LU 09UL -	- MSC 9M MSC 9LM -	- MGN 9C MGN 9H -	LWLC 9 LWL 9 - LWLG 9
M 12C M 12N M 12L	SRS 12GS SRS 12GM SRS 12GN	- LU 12TL LU 12UL	- MSC 12M MSC 12LM	- MGN 12C MGN 12H	LWLC 12 LWL 12 LWLG 12
M 15C M 15N M 15L	SRS 15GS SRS 15GM SRS 15GN	- LU 15AL LU 15BL	- MSC 15M MSC 15LM	- MGN 15C MGN 15H	LWLC 15 LWL 15 LWLG 15
M 20C M 20N M 20L	- SRS 20GM -	- - -	- - -	- - -	LWLC 20 LWL 20 LWLG 20

MB Series (Miniature Wide Type)

WON	THK	NSK	PMI	HIWIN	IKO
MB 5C MB 5N	SRS 5WGM SRS 5WGN	- LE 05AL	- -	- -	LWLCF 10 LWLF 10
MB 7C MB 7N MB 7L	SRS 7WGS SRS 7WGM SRS 7WGN	- LU 07TL -	- MSD 7M MSD 7LM	- MGW 7C MGW 7H	LWLCF 14 LWLF 14 LWLF 14
MB 9C MB 9N MB 9L	SRS 9WGS SRS 9WGM SRS 9WGN	- LE 09TL, TR -	- MSD 9M MSD 9LM	- MGW 9C MGW 9H	LWLCF 18 LWLF 18 LWLF 18
MB 12C MB 12N MB 12L	SRS 12WGS SRS 12WGM SRS 12WGN	- LE 12AL, AR -	- MSD 12M MSD 12LM	- MGW 12C MGW 12H	LWLCF 24 LWLF 24 LWLF 24
MB 15C MB 15N MB 15L	SRS 15WGS SRS 15WGM SRS 15WGN	- LE 15AL, AR -	- MSD 15M MSD 15LM	- MGW 15C MGW 15H	LWLCF 42 LWLF 42 LWLF 42

<Table of model number comparison with spacer chain type of a different company>

1.H...S Series(Standard Type)

WON	THK	NSK	PMI	HIWIN
H 15FN...S H 15FL...S	SHS 15C SHS 15LC	SH 15FL SH 15HL	SME 15EA SME 15LEA	QHW 15CA -
H 20FN...S H 20FL...S	SHS 20C SHS 20LC	SH 20FL SH 20HL	SME 20EA SME 20LEA	QHW 20CA QHW 20HA
H 25FN...S H 25FL...S	SHS 25C SHS 25LC	SH 25FL SH 25HL	SME 25EA SME 25LEA	QHW 25CA QHW 25HA
H 30FN...S H 30FL...S	SHS 30C SHS 30LC	SH 30FL SH 30HL	SME 30EA SME 30LEA	QHW 30CA QHW 30HA
H 35FN...S H 35FL...S	SHS 35C SHS 35LC	SH 35FL SH 35HL	SME 35EA SME 35LEA	QHW 35CA QHW 35HA
H 45FN...S H 45FL...S	SHS 45C SHS 45LC	SH 45FL SH 45HL	SME 45EA SME 45LEA	QHW 45CA QHW 45HA
H 55FN...S H 55FL...S	SHS 55C SHS 55LC	SH 55FL SH 55HL	- -	- -
H 15RN...S H 15RL...S	SHS 15R -	SH 15AN SH 15BN	SME 15SA SME 15LSA	QHH 15CA -
H 20RN...S H 20RL...S	SHS 20V SHS 20LV	SH 20AN SH 20BN	SME 20SA SME 20LSA	QHH 20CA QHH 20HA
H 25RN...S H 25RL...S	SHS 25R SHS 25LR	SH 25AN SH 25BN	SME 25SA SME 25LSA	QHH 25CA QHH 25HA
H 30RN...S H 30RL...S	SHS 30R SHS 30LR	SH 30AN SH 30BN	SME 30SA SME 30LSA	QHH 30CA QHH 30HA
H 35RN...S H 35RL...S	SHS 35R SHS 35LR	SH 35AN SH 35BN	SME 35SA SME 35LSA	QHH 35CA QHH 35HA

2. S...S Series(Slim Type)

WON	THK	NSK	PMI	HIWIN
S 15RC...S S 15RN...S	SSR 15XV SSR 15XW	SS 15CL SS 15AL	SME 15EB SME 15LEB	QEH 15SA QEH 15CA
S 20RC...S S 20RN...S	SSR 20XV SSR 20XW	SS 20CL SS 20AL	SME 20EB SME 20LEB	QEH 20SA QEH 20CA
S 25RC...S S 25RN...S	SSR 25XV SSR 25XW	SS 25CL SS 25AL	SME 25EB SME 25LEB	QEH 25SA QEH 25CA
S 15FC...S S 15FN...S	- SSR 15XTB	SS 15JM SS 15EM	SME 15SB SME 15LSB	QEW 15SA QEW 15CA
S 20FC...S S 20FN...S	- SSR 20XTB	SS 20JM SS 20EM	SME 20SB SME 20LSB	QEW 20SA QEW 20CA
S 25FC...S S 25FN...S	- SSR 25XTB	SS 25JM SS 25EM	SME 25SB SME 25LSB	QEW 25SA QEW 25CA

3. HS...S Series(Slim Type)

WON	THK
HS 25RN...S HS 25RL...S	SHS 25V SHS 25LV
HS 30RN...S HS 30RL...S	SHS 30V SHS 30LV
HS 35RN...S HS 35RL...S	SHS 35V SHS 35LV

Appendix

Contents

1	Conversion Table from International System of Units (SI).....	318
2	N-kgf Conversion Table.....	320
3	kg-lb Conversion Table.....	321
4	Hardness Conversion Table.....	322
5	Dimensional Tolerance of Shaft.....	324
6	Dimensional Tolerance of Housing Hole.....	326
7	Usage Example of Linear Motion Guide.....	328
8	Usage Example of Crossed Roller Bearing.....	336



j5	j6	j7	k5	k6	k7	m5	m6	n6	p6	r6	r7	Diameter (mm)	
												Above	Below
+3 -2	+6 -2	+8 -4	+6 +1	+9 +1	+13 +1	+9 +4	+12 +4	+16 +8	+20 +12	+23 +15	+27 +15	3	6
+4 -2	+7 -2	+10 -5	+7 +1	+10 +1	+16 +1	+12 +6	+15 +6	+19 +10	+24 +15	+28 +19	+34 +19	6	10
+5 -3	+8 -3	+12 -6	+9 +1	+12 +1	+19 +1	+15 +7	+18 +7	+23 +12	+29 +18	+34 +23	+41 +23	10	18
+5 -4	+9 -4	+13 -6	+11 +2	+15 +2	+23 +2	+17 +8	+21 +8	+28 +15	+35 +22	+41 +28	+49 +28	18	30
+6 -5	+11 -5	+15 -10	+13 +2	+18 +2	+27 +2	+20 +9	+25 +9	+33 +17	+42 +26	+50 +34	+59 +34	30	50
+6 -7	+12 -7	+18 -12	+15 + 2	+21 + 2	+32 + 2	+24 + 11	+30 + 11	+39 +20	+51 +32	+60 +41	+71 +41	50	65
+6 -9	+13 -9	+20 -15	+18 + 3	+25 + 3	+38 + 3	+28 +13	+35 +13	+45 +23	+59 +37	+62 +43	+73 +43	65	80
+7 -11	+14 -11	+22 -18	+21 + 3	+28 + 3	+43 + 3	+33 +15	+40 +15	+52 +27	+68 +43	+73 +51	+86 +51	80	100
										+76 +54	+89 +54	100	120
										+88 +63	+103 +63	120	140
										+90 +65	+105 +65	140	160
										+93 +68	+108 +68	160	180
+7 -13	+16 -13	+25 -21	+24 + 4	+33 + 4	+50 + 4	+37 +17	+46 + 17	+60 +31	+79 +50	+106 +77	+123 +77	180	200
										+109 +80	+126 +80	200	225
										+113 +84	+130 +84	225	250
+7 -16	±16	±26	+27 + 4	+36 + 4	+56 + 4	+43 +20	+52 +20	+66 +34	+88 +56	+126 +94	+146 +94	250	280
										+130 +98	+150 +98	280	315
+7 -18	±18	+29 -28	+29 + 4	+40 + 4	+61 + 4	+46 +21	+57 +21	+73 +37	+98 +62	+144 +108	+165 +108	315	355
										+150 +114	+171 +114	355	400
+7 -20	±20	+31 -32	+32 + 5	+45 + 5	+68 + 5	+50 +23	+63 +23	+80 +40	+108 +68	+166 +126	+189 +126	400	450
										+172 +132	+195 +132	450	500
-	-	-	-	+44 0	+70 0	-	+70 +26	+88 +44	+122 +78	+194 +150	+220 +150	500	560
										+199 +155	+225 +155	560	630
-	-	-	-	+50 0	+80 0	-	+80 +30	+100 + 50	+138 +88	+225 +175	+255 +175	630	710
										+235 +185	+265 +185	710	800
-	-	-	-	+56 0	+90 0	-	+90 +34	+112 +56	+156 +100	+266 +210	+300 +210	800	900
										+276 +220	+310 +220	900	1000
-	-	-	-	+66 0	+105 0	-	+106 + 40	+132 + 66	+186 +120	+316 +250	+355 +250	1000	1120
										+326 +260	+365 +260	1120	1250
-	-	-	-	+78 0	+125 0	-	+126 + 48	+156 + 78	+218 +140	+378 +300	+425 +300	1250	1400
										+408 +330	+455 +330	1400	1600
-	-	-	-	+92 0	+150 0	-	+150 + 58	+184 + 92	+262 +170	+462 +370	+520 +370	1600	1800
										+492 +400	+550 +400	1800	2000



6. Dimensional Tolerance of Housing Hole



Diameter (mm)		E6	F6	F7	G6	G7	H6	H7	H8	J6	J7	JS6	JS7
Above	Below												
10	18	+43 +32	+27 +16	+34 +16	+17 + 6	+24 + 6	+11 0	+18 0	+27 0	+6 -5	+10 -8	±5,5	±9
18	30	+53 +40	+33 +20	+41 +20	+20 + 7	+28 + 7	+13 0	+21 0	+33 0	+8 -5	+12 -9	±6,5	±10,5
30	50	+66 +50	+41 +25	+50 +25	+25 + 9	+34 + 9	+16 0	+25 0	+39 0	+10 - 6	+14 -11	±8	±12,5
50	80	+79 +60	+49 +30	+60 +30	+29 +10	+40 +10	+19 0	+30 0	+46 0	+13 - 6	+18 -12	±9,5	±15
80	120	+94 +72	+58 +36	+71 +36	+34 +12	+47 +12	+22 0	+35 0	+54 0	+16 - 6	+22 -13	±11	±17,5
120	180	+110 +85	+68 +43	+83 +43	+39 +14	+54 +14	+25 0	+40 0	+63 0	+18 - 7	+26 -14	±12,5	±20
180	250	+129 +100	+79 +50	+96 +50	+44 +15	+61 +15	+29 0	+46 0	+72 0	+22 - 7	+30 -16	±14,5	±23
250	315	+142 +110	+88 +56	+108 + 56	+49 +17	+69 +17	+32 0	+52 0	+81 0	+25 - 7	+36 -16	±16	±26
315	400	+161 +125	+98 +62	+119 +62	+54 +18	+75 +18	+36 0	+57 0	+89 0	+29 - 7	+39 -18	±18	±28,5
400	500	+175 +135	+108 +68	+131 +68	+60 +20	+83 +20	+40 0	+63 0	+97 0	+33 - 7	+43 -20	±20	±31,5
500	630	+189 +145	+120 +76	+146 +76	+66 +22	+92 +22	+44 0	+70 0	+110 0	-	-	±22	±35
630	800	+210 +160	+130 +80	+160 +80	+74 +24	+104 + 24	+50 0	+80 0	+125 0	-	-	±25	±40
800	1000	+226 +170	+142 +86	+176 +86	+82 +26	+116 +26	+56 0	+90 0	+140 0	-	-	±28	±45
1000	1250	+261 +195	+164 +98	+203 + 98	+94 +28	+133 + 28	+66 0	+105 0	+165 0	-	-	±33	±52,5
1250	1600	+298 +220	+188 +110	+235 +110	+108 +30	+155 +30	+78 0	+125 0	+195 0	-	-	±39	±62,5
1600	2000	+332 +240	+212 +120	+270 +120	+124 +32	+182 + 32	+92 0	+150 0	+230 0	-	-	±46	±75
2000	2500	+370 +260	+240 +130	+305 +130	+144 +34	+209 + 34	+110 0	+175 0	+280 0	-	-	±55	±87,5



K5	K6	K7	M5	M6	M7	N5	N6	N7	P6	P7	Diameter (mm)	
											Above	Below
+2 -6	+2 -9	+6 -12	-4 -12	-4 -15	0 -18	-9 -17	-9 -20	-5 -23	-15 -26	-11 -29	10	18
+1 -8	+2 -11	+6 -15	-5 -14	-4 -17	0 -21	-12 -21	-11 -24	-7 -28	-18 -31	-14 -35	18	30
+2 -9	+3 -13	+7 -18	-5 -16	-4 -20	0 -25	-13 -24	-12 -28	-8 -33	-21 -37	-17 -42	30	50
+3 -10	+4 -15	+9 -21	-6 -19	-5 -24	0 -30	-15 -28	-14 -33	-9 -39	-26 -45	-21 -51	50	80
+2 -13	+4 -18	+10 -25	-8 -23	-6 -28	0 -35	-18 -33	-16 -38	-10 -45	-30 -52	-24 -59	80	120
+3 -15	+4 -21	+12 -28	-9 -27	-8 -33	0 -40	-21 -39	-20 -45	-12 -52	-36 -61	-28 -68	120	180
+2 -18	+5 -24	+13 -33	-11 -31	-8 -37	0 -46	-25 -45	-22 -51	-14 -60	-41 -70	-33 -79	180	250
+3 -20	+5 -27	+16 -36	-13 -36	-9 -41	0 -52	-27 -50	-25 -57	-14 -66	-47 -79	-36 -88	250	315
+3 -22	+7 -29	+17 -40	-14 -39	-10 -46	0 -57	-30 -55	-26 -62	-16 -73	-51 -87	-41 -98	315	400
+2 -25	+8 -32	+18 -45	-16 -43	-10 -50	0 -63	-33 -60	-27 -67	-17 -80	-55 -95	-45 -108	400	500
-	0 -44	0 -70	-	-26 -70	-26 -96	-	-44 -88	-44 -114	-78 -122	-78 -148	500	630
-	0 -50	0 -80	-	-30 -80	-30 -110	-	-50 -100	-50 -130	-88 -138	-88 -168	630	800
-	0 -56	0 -90	-	-34 -90	-34 -124	-	-56 -112	-56 -146	-100 -156	-100 -190	800	1000
-	0 -66	0 -105	-	-40 -106	-40 -145	-	-66 -132	-66 -171	-120 -186	-120 -225	1000	1250
-	0 -78	0 -125	-	-48 -126	-48 -173	-	-78 -156	-78 -203	-140 -218	-140 -265	1250	1600
-	0 -92	0 -150	-	-58 -150	-58 -208	-	-92 -184	-92 -242	-170 -262	-170 -320	1600	2000
-	0 -110	0 -175	-	-68 -178	-68 -243	-	-110 -220	-110 -285	-195 -305	-195 -370	2000	2500



7. Usage Example of Linear Motion Guide

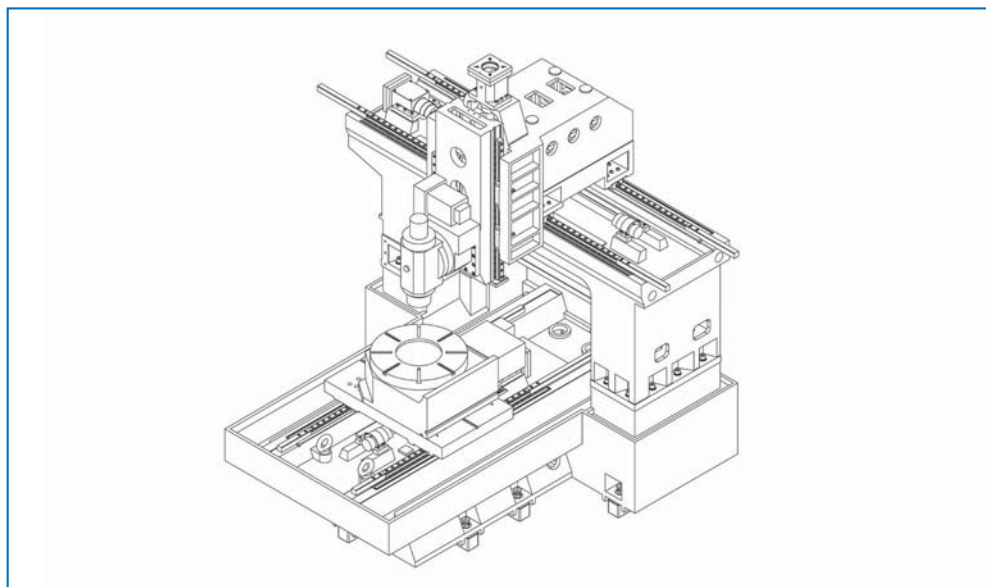
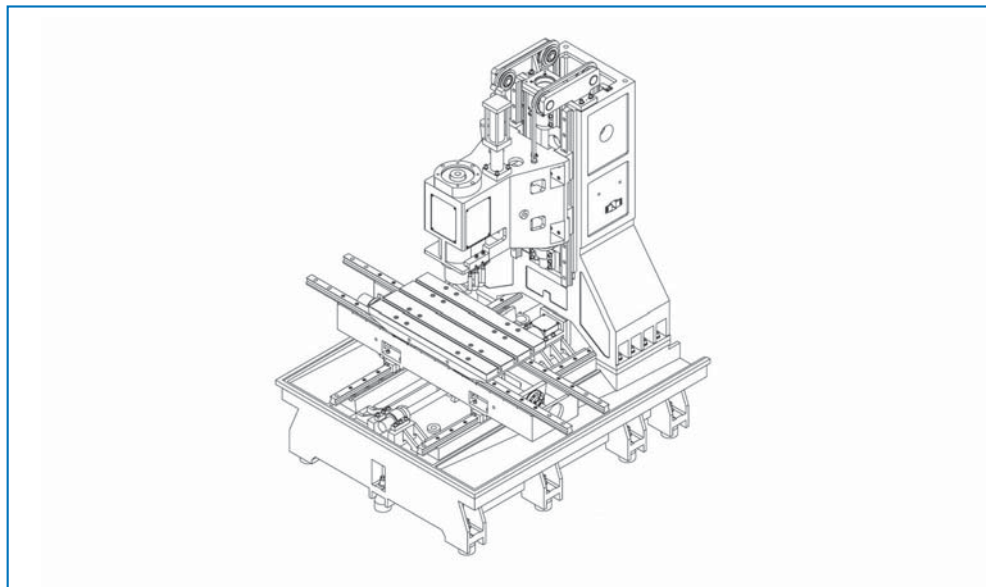


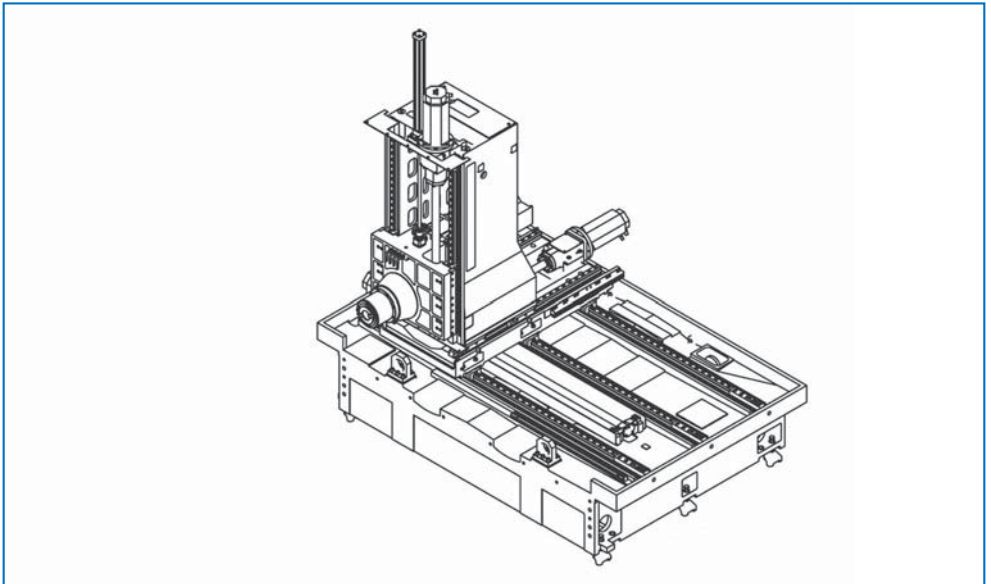
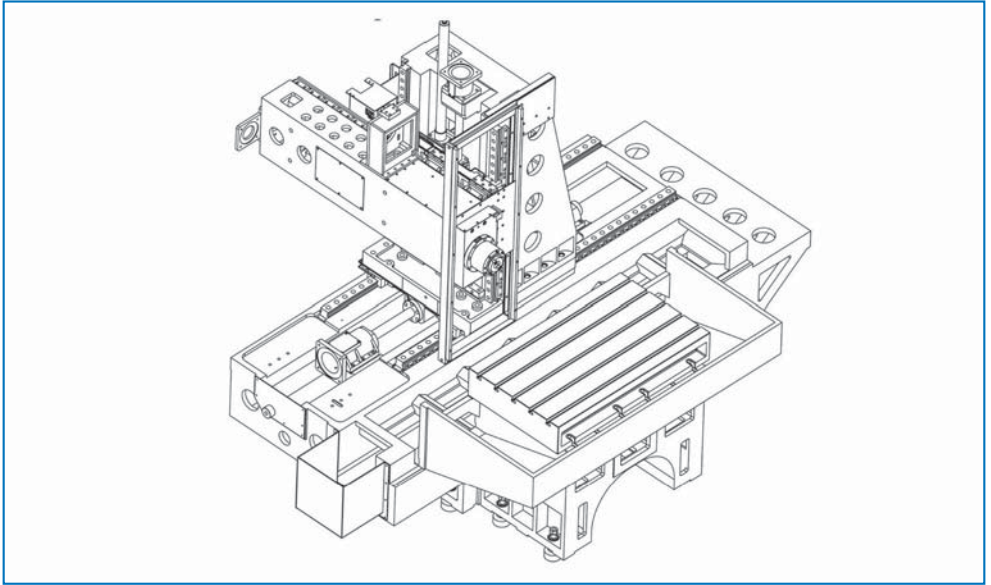


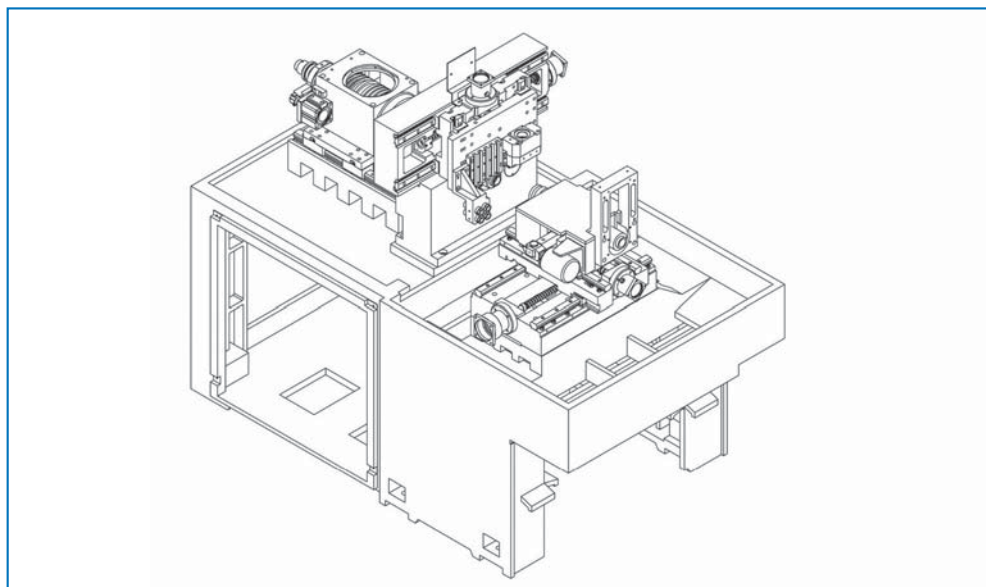
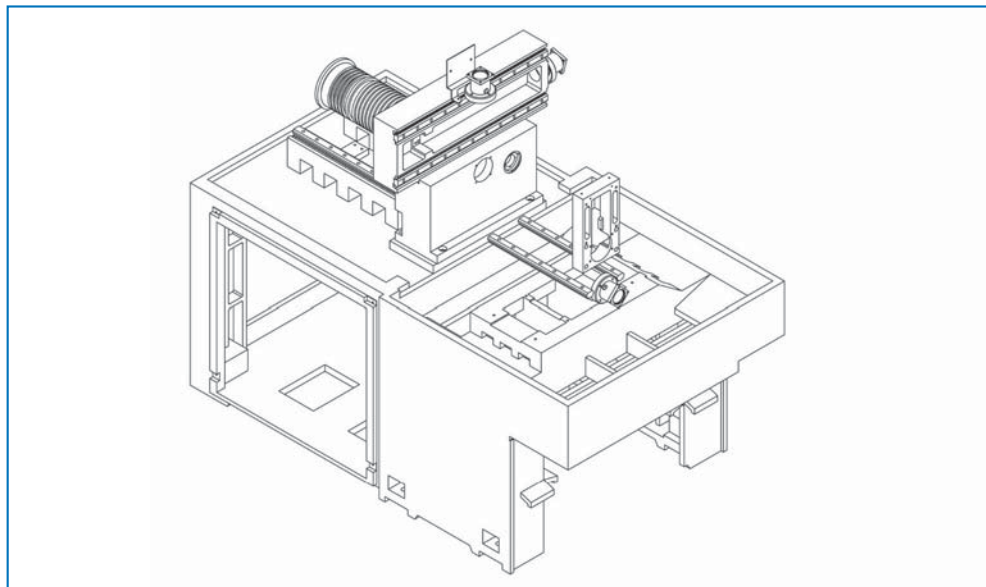


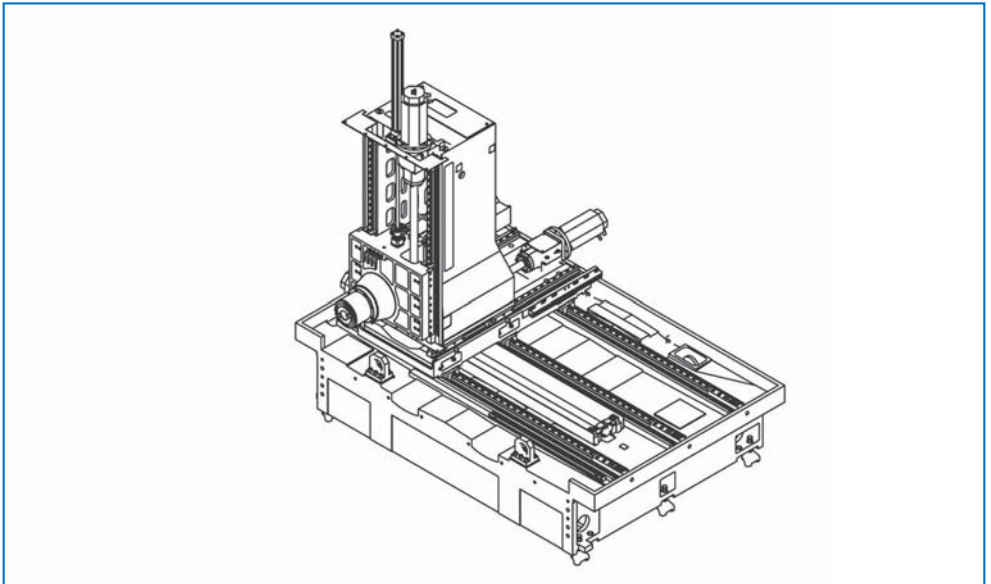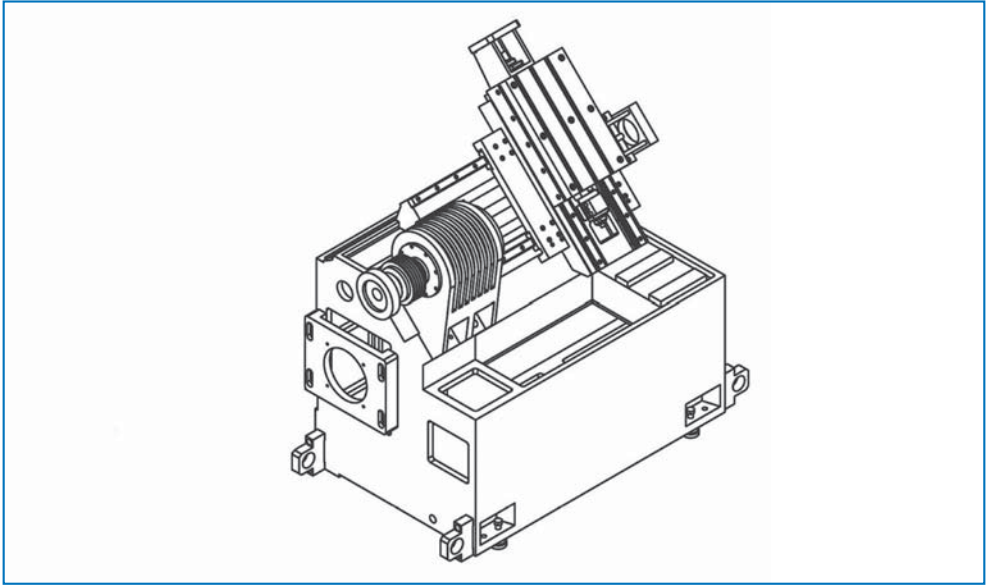

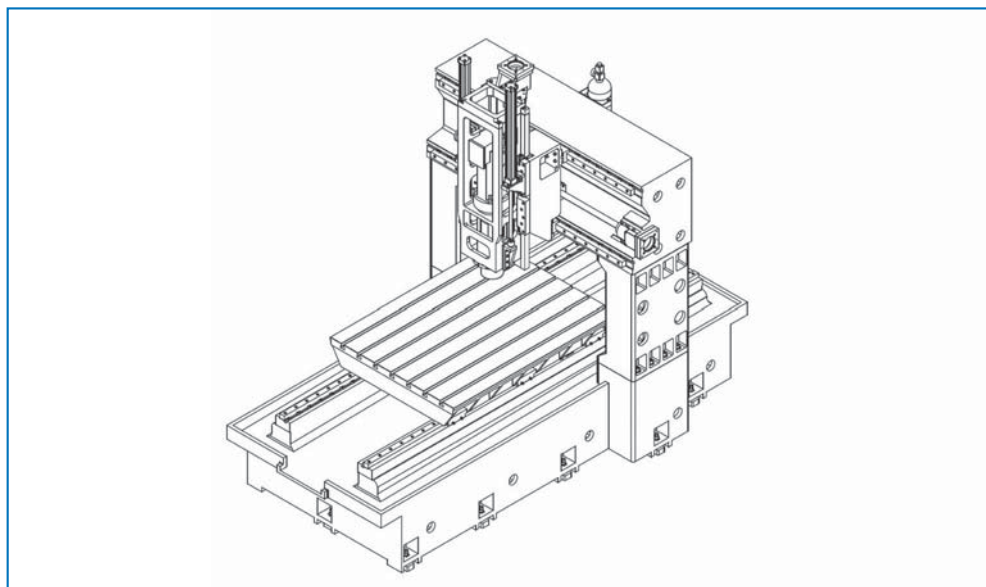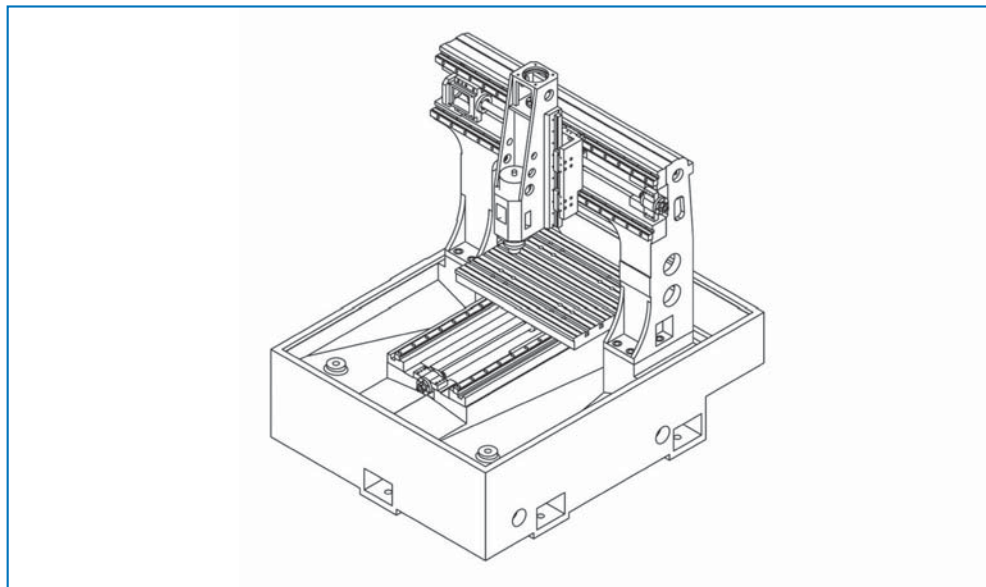

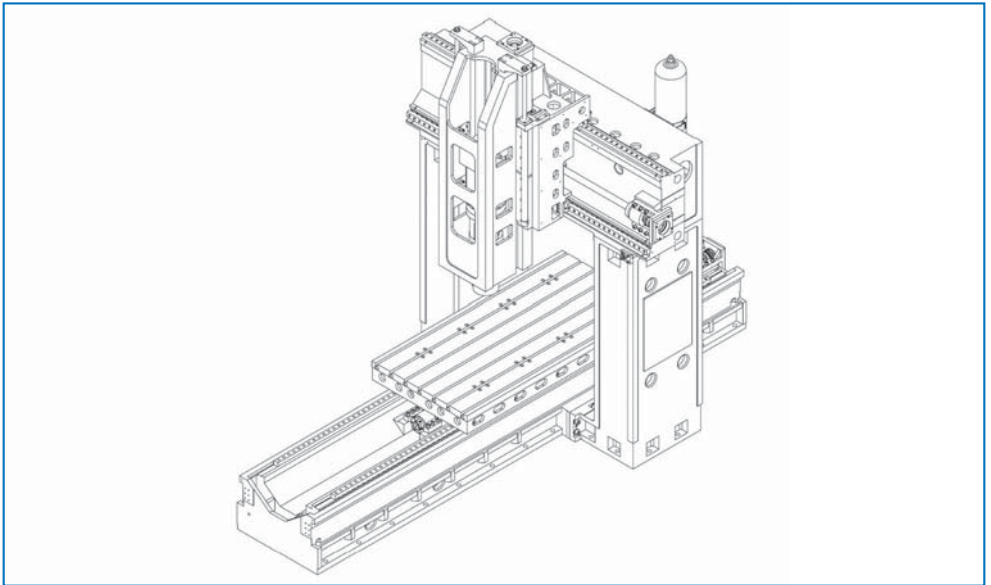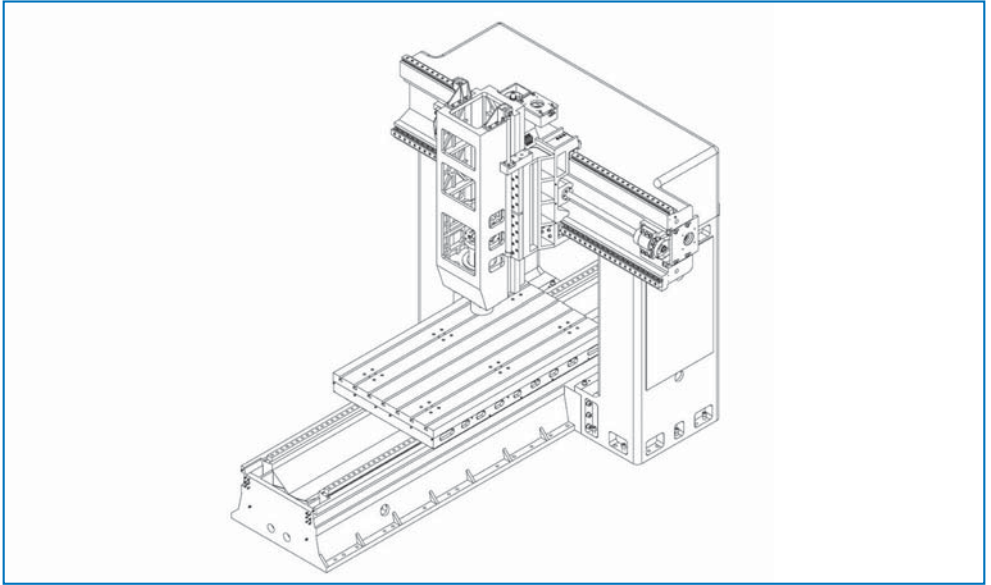

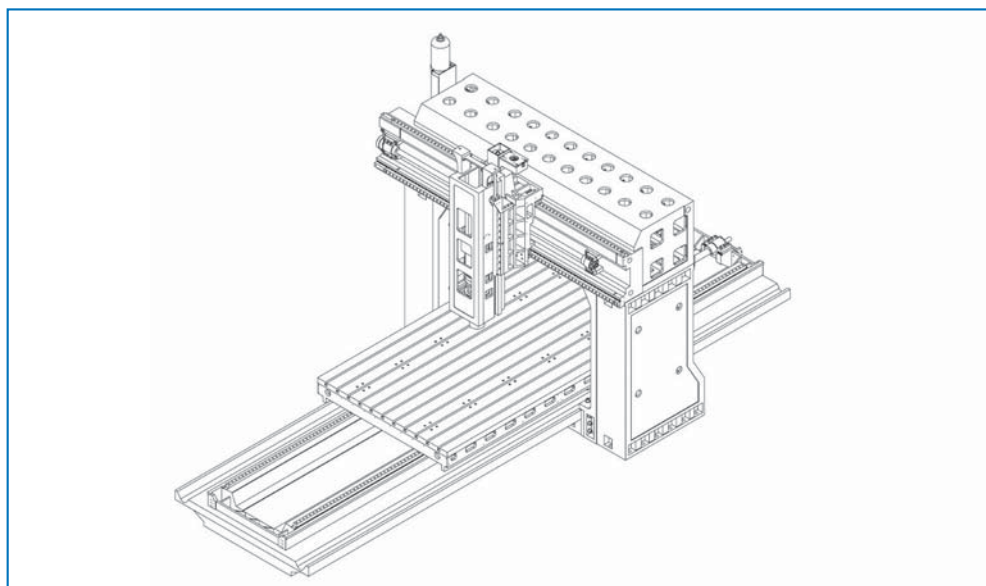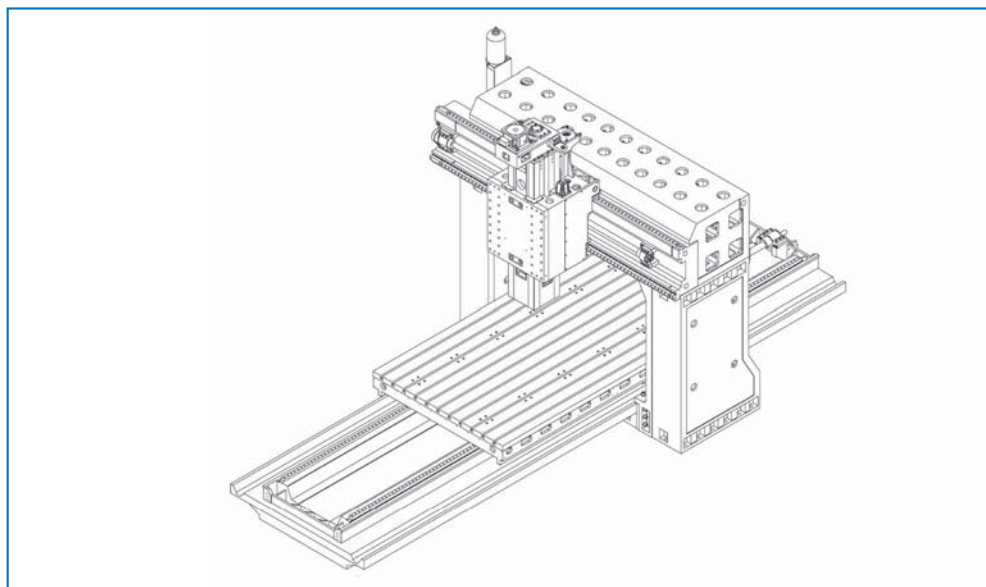

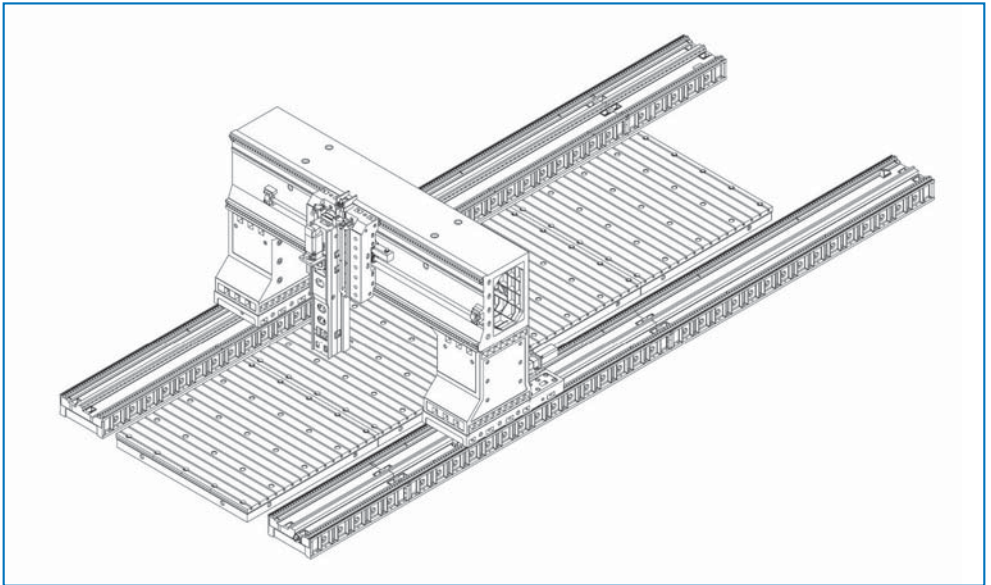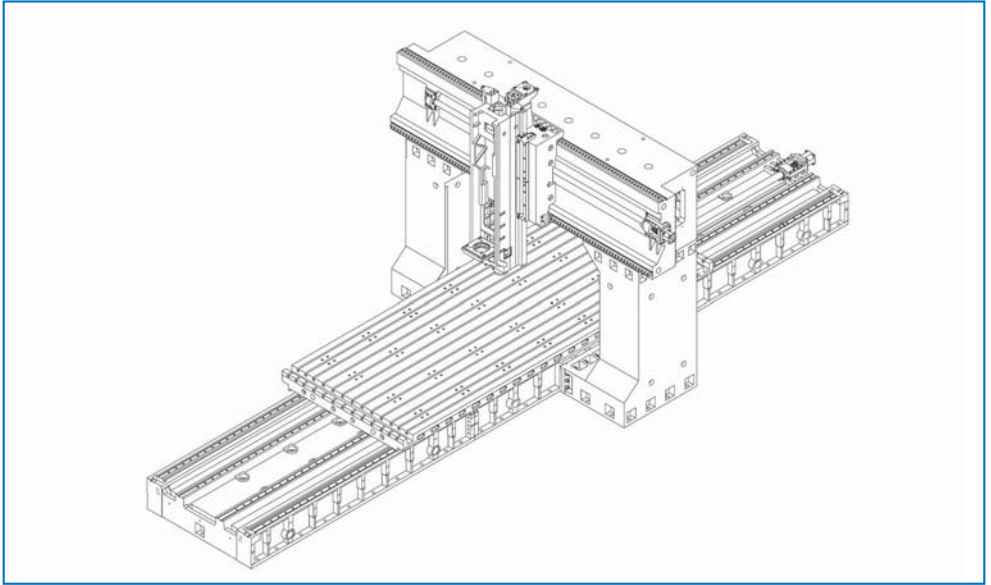







WON
LINEAR MOTION SYSTEM

LINEAR MOTION SYSTEM

The first edition published in April 2014

The 12th revised edition printed first in June 2022
The 12th revised edition published first in July 2022



W202206-14

We do our best to write our catalog rightly. For improvements, it is possible to change product appearance and specifications without any notice.

We are not responsible for any damage caused by any typo found in the catalog, please contact us before your adoption.