



Introduction

The **Hepco**Motion SBD is an exceptionally rugged, quiet and precise linear unit. It uses super-smooth Hepco LBG caged linear ball guides having such high load capacity that system life is rarely an issue. Drive is provided by a new high strength tooth belt. The unit is housed in an anodized aluminum beam and is completely enclosed with a stainless steel cover to provide excellent protection from dirt and debris. A corrosion resistant version with all external components made in stainless steel or anodized aluminum is an option. A version for use in high specification clean rooms is also available from Bishop-Wisecarver \square 5-6.

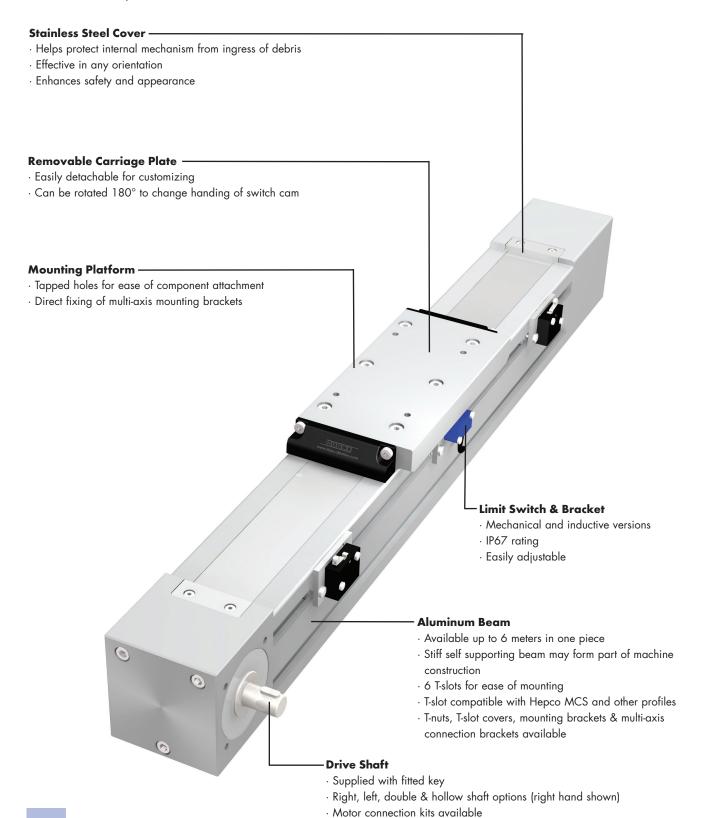


System Composition

SBD units are available in lengths up to 6m in one piece and unlimited lengths can be achieved with joined beams. Units are factory adjusted and lubricated. Re-lubrication of the linear ball guide is easily achieved via an access hole in the beam. SBD units are suitable for single or multi-axis applications and can be supplied with a wide range of gearboxes, motors and drives. The beam profiles and T-slots are compatible with Hepco's MCS frame building system and its extensive range of accessories, allowing complete machines to be built.

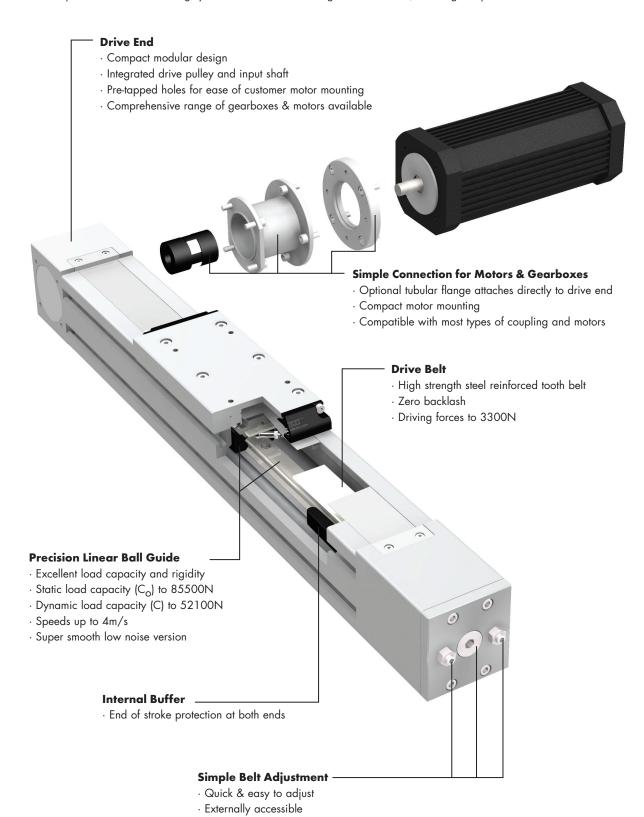

Data & Dimensions

The main dimensions of the SBD unit are shown below. Further details can be obtained from the 3D CAD files available from Bishop-Wisecarver's technical department or at www.bwc.com. Units are supplied in increments of 60mm (SBD20-80) and 80mm (SBD30-100) up to 6000mm in one piece 10. Longer units are made from more than one piece. The nominal stroke length is calculated with the carriage against the internal buffers. In practice a clearance should be provided to allow for overrun.

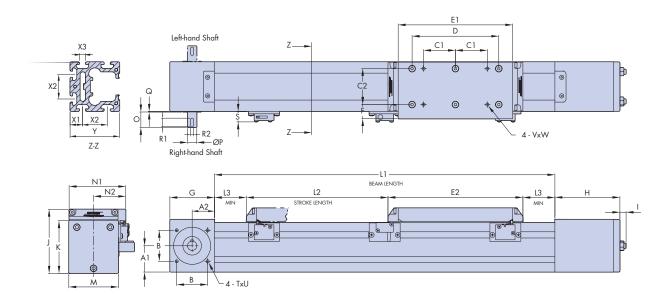


SBD Unit	A1	A2	В	C1	C2	D	E1	E2	F	G	н	1	J	К	L1 (min)	L2 Nominal Stroke	L3 (min)
SBD20-80	42.4	36	50	51.5	58	140	185	218	23	72	105	12	103.5	85	550	L1 - 300	41
SBD30-100	51.6	48	65	65	76	180	235	268	24.5	96	145.5	13	123.5	105	580	L1 - 365	48.5

SBD Unit	M	N1	N2	0	Р	Q	R1	R2	S	TxU	VxW	Хl	X2	хз	Y
SBD20-80	80	91.5	52	25	15	1	13.5	5	17	M6 x 15	M6 x 9.5	20	40	10	80
SBD30-100	100	112	62.5	36	20	1	22	6	1 <i>7</i>	M6 x 15	M8 x 9.5	30	40	10	100


All dimensions in mm

Re-lubrication of the ball guide carriage block is via an access point in the side of the beam (see below), which is closed off with a threaded plug. The lubrication interval depends on length of stroke, speed and duty. Contact Bishop-Wisecarver's technical department for further details.

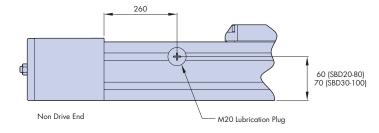


Drive Connections

The **Hepco**Motion SBD can be supplied with a fitted motor or gearbox to suit many different applications. Connection to other motors and gearboxes is quick and simple using one of the fixing kits. Standard kits to suit a range of servo motor frame sizes 036, 056 & 071 are stock items. Bishop-Wisecarver can offer a fast service on special connection kits for attachment of customer's motors and gearboxes. Bishop-Wisecarver can supply AC motors, stepper and servo systems including braked motors, encoders and inverter drives for power and control. Please contact Bishop-Wisecarver for full details and application advice. A typical servo motor arrangement is shown in the illustration below.

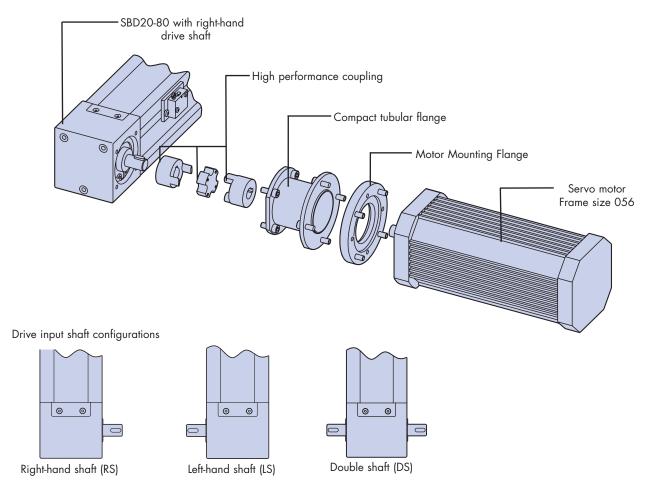


The hollow shafted arrangement may offer a more compact and lower cost means of retro-fitting a motor and/or gearbox onto an SBD. For more information, please contact Bishop-Wisecarver.

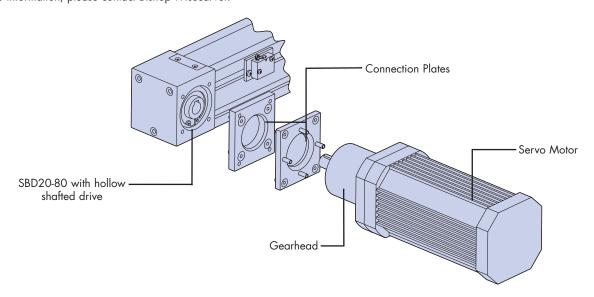


Cleanroom Version

The cleanroom version of the SBD unit has been designed to meet an increasing demand for clean manufacturing processes and environments. This version of the SBD unit is ready for connection to vacuum extraction which minimizes particle emissions. All external parts are made from anodized aluminum or stainless steel. This SBD cleanroom unit is certified by the Fraunhofer IPA Institute for use in cleanroom environments and meets air cleanliness class 3 according to ISO 14644. For more information, contact Bishop-Wisecarver.

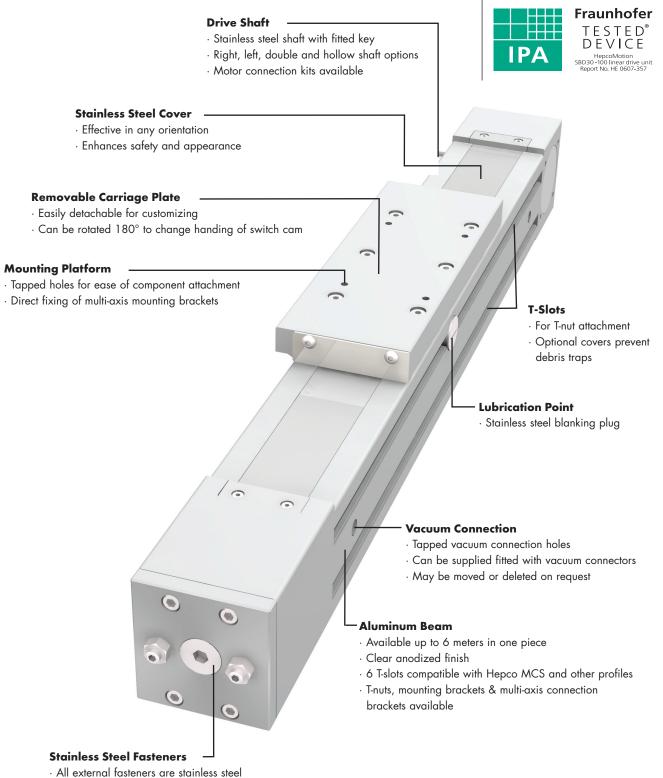

Data & Dimensions

The main dimensions of the SBD cleanroom version are shown in the table below. Further details can be obtained from the 3D CAD files available from Bishop-Wisecarver's technical department or at www.bwc.com. Units are supplied in increments of 60mm (SBD20-80) and 80mm (SBD30-100) up to 6000mm in one piece 10. Longer units are made from more than one piece. The nominal stroke length is calculated with the carriage against the internal buffers. In practice a clearance should be provided to allow for overrun.

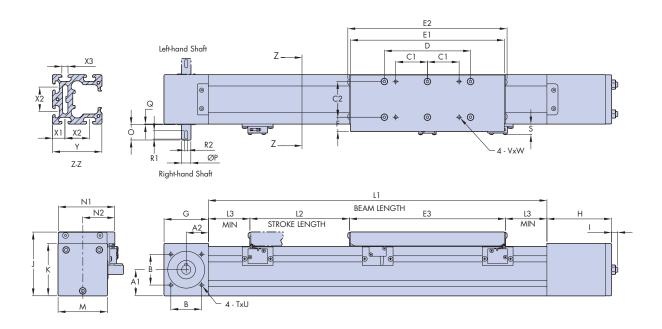


SBD Unit	A1	A2	В	C1	C2	D	E1	E2	E3	F	G	н	ı	J	К	L1 (min)	L2 Nominal Stroke	L3 (min)
SBD20-80	42.4	36	50	51.5	58	140	250	259	253	23	72	105	12	103.5	85	550	L1 - 300	23.5
SBD30-100	51.6	48	65	65	76	180	300	309	303	24.5	96	145.5	13	123.5	105	580	L1 - 365	31

SBD Unit	М	NI	N2	0	P	Q	R1	R2	S	TxU	VxW	Хl	X2	хз	Y
SBD20-80	80	91.5	52	25	15	1	13.5	5	17	M6 x 15	M6 x 9.5	20	40	10	80
SBD30-100	100	112	62.5	36	20	1	22	6	17	M6 x 15	M8 x 9.5	30	40	10	100


All dimensions in mm

The vacuum extraction connection hole positions together with the lubrication access plug are shown below. Bishop-Wisecarver can supply vacuum connections pre-fitted on request. Vacuum holes can be repositioned to suit customer requirements or deleted.

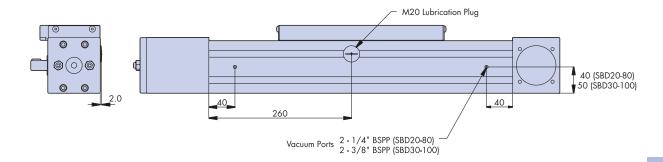


Axis Connections

The **Hepco**Motion SBD design allows for easy construction of multi-axis systems onto Hepco MCS and other frames and machine elements. A comprehensive range of mounting kits and accessories is available. Some typical system configurations are shown below to illustrate the versatility of the SBD design. Connection components have been identified together with their part numbers for ease of selection. Bishop-Wisecarver's technical department can assist with application inquiries or undertake the design of multi-axis systems.

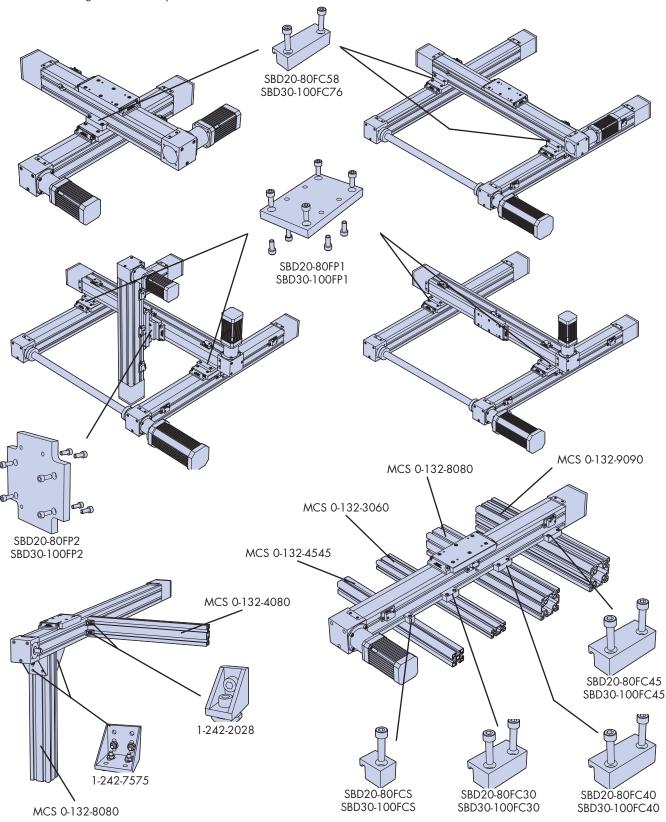

Load & Life Calculations

The nominal load capacities for the SBD (based on LBG ball guide dynamic load capacity) and a typical load corresponding to 10 000km* travel are included in the table below for each of the 5 direct and moment loading directions.

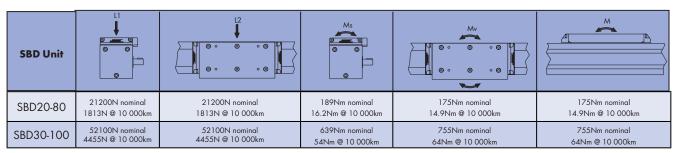

^{*} The tabulated load figures above for 10 000km assume a value for variable load factor f_v = 2 which is suitable for most applications.

To calculate the life of an SBD unit, first calculate the load factor L_F using the equation below:

$$L_F = \frac{L_1}{L_{1(max)}} + \frac{L_2}{L_{2(max)}} + \frac{M_S}{M_{S(max)}} + \frac{M}{M_{(max)}} + \frac{M_V}{M_{V(max)}} \le 0.2$$

The life of the system is then calculated using the equation below:

System Life (km) =
$$50 \times \left(\frac{1}{L_F \times f_v}\right)^3$$

Note: f_v is the variable load factor which takes account of speed and vibration/impact conditions. A value of 2 is appropriate for typical SBD applications, but consult Bishop-Wisecarver for specific advice.

Technical Data


The table below includes the parameters necessary to calculate the performance and duty of an SBD system.

			SBD2	20-80	SBD3	0-100
Parameter			Standard	Cleanroom	Standard	Cleanroom
Mass of carriage	Мс	kg	1.4	1.6	3.6	3.9
Mass of belt per m	Mb	kg/m	0.	12	0.3	34
Mass of SBD unit	Mυ	kg	9.7 x L + 6.0	9.7 x L + 6.2	15.7 x L + 12.2	15.7 x L +12.5
Pulley radius	r	cm	2.3	39	3.	.5
Drive efficiency			0.	.9	0	.9
Break away friction	Fba	N	25	10	35	25
Coefficient of friction	þ		0.0	01	0.0	01
Beam moment of inertia*	l _{x-x}	mm ⁴	1500	0000	3700	0000
beam moment of merna	l _{y-y}	111111	1800	0000	4600	0000
Max linear force (belt)	Fmax	N	10	00	33	00
Linear movement per shaft rev		mm	1.5	50	22	20
Belt tooth pitch		mm		5	1	0
LBG carriage basic load rating (dynamic)	С	N	212	200	52	100

^{*}The beam moment of inertia figure is used in the calculation of beam deflection, with a high figure corresponding to a stiff beam. For further guidance on beam deflection calculations please contact Bishop-Wisecarver.


Ancillary Components

Limit switch assembly includes mechanical switch, bracket, fixing screws and T-nuts.




SBD20-80-V3SWA-M SBD30-100-V3SWA-M

Limit switch assembly includes inductive switch, bracket, fixing screws and T-nuts.



SBD20-80-V3SWA-I SBD30-100-V3SWA-I

Plastic T-slot cover supplied fitted in each of the T-slots in the beam.




1-242-1016

The quick fit type T-nut can be inserted into T-slot and rotated through 90° to engage. T-nuts are available threaded M4, M5, M6 and M8.



M4 = 1-242-1029 M5 = 1-242-1030 M6 = 1-242-1001 M8 = 1-242-1002

Drive shafts in a number of sizes and designs are available. Contact Bishop-Wisecarver for details.



Ordering Details

The ordering information below is given to assist communication, but you are recommended to discuss your application with Bishop-Wisecarver first so that we can help to specify the best unit configuration to suit your needs.


SBD 20-80 L1750 C2 RS SBD = product range Size of unit: Choose 20-80 or 30-100 Beam Length. Beam lengths are available in increments of 60mm from 550mm for SBD20-80 and increments of 80mm from 580mm for SBD30-100, \(\mathreal{\Pi}\) 3 & 6 Unit Type: C1 = corrosion resistant \(\mathreal{\Pi}\)1; C2 = cleanroom \(\mathreal{\Pi}\)5; leave blank for standard units \(\mathreal{\Pi}\)1 Drive shaft: LS for left-hand; RS for right-hand; DS for double shaft \(\mathreal{\Pi}\)4

Notes

www.bwc.com

SBD Long Carriage Option

SBD units in both standard and cleanroom versions are available with a long carriage option. This version has two LBG bearing blocks in the carriage and has much improved load capacity, particularly in M & Mv directions. The main dimensions of the standard long carriage SBD units are shown below. Further details can be obtained from the 3D CAD files available from Bishop-Wisecarver's technical department or at www.bwc.com. Standard & cleanroom units are supplied in increments of 60mm (SBD20-80) and 80mm (SBD30-100) up to 6000mm. Longer units are made from more than one piece. The nominal stroke length is calculated with the carriage against the internal buffers. In practice a clearance should be provided to allow for overrun. Re-lubrication of the ball guide carriage blocks is via two access points in the side of the beam (see below), and closed off with a threaded plug. The lubrication interval depends on length of stroke, speed and duty, contact Bishop-Wisecarver's technical department for further details.

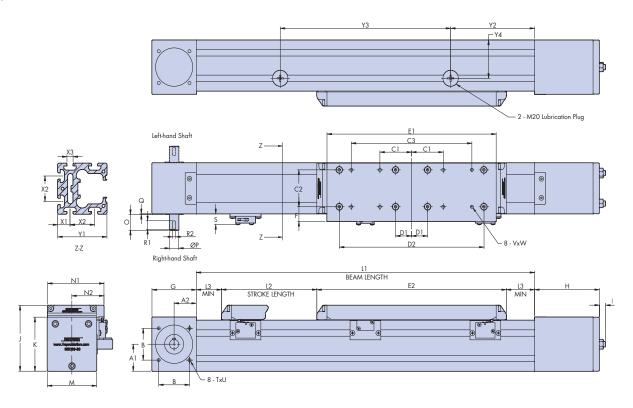


SBD Unit	A 1	A2	В	C 1	C2	СЗ	D1	D2	E1	E2	F	G	н	-	J	K	L1 (min)	L2 Nominal Stroke	L3 (min)
SBD20-80	42.4	36	50	51.5	58	196	26	235	275	308	23	72	105	12	103.5	85	550	L1 - 390	41
SBD30-100	51.6	48	65	65	76	260	46	295	340	373	24.5	96	145.5	13	123.5	105	580	L1 - 470	48.5

SBD Unit	M	N1	N2	0	Р	Q	R1	R2	S	TxU	VxW	X1	X2	ХЗ	Y1	Y2	Y3	Y4
SBD20-80	80	91.5	52	25	15	1	13.5	5	17	M6 x 15	M6 x 9.5	20	40	10	80	162.5	205	60
SBD30-100	100	112	62.5	36	20	1	22	6	17	M6 x 15	M8 x 9.5	30	40	10	100	164	252.5	70

SBD Long Carriage Option

The cleanroom version of the SBD unit has been designed to meet an increasing demand for clean manufacturing processes and environments. This version of the SBD unit is ready for connection to vacuum extraction which minimizes particle emissions. All external parts are made from anodized aluminum or stainless steel. This SBD cleanroom unit is certified by the Fraunhofer IPA Institute for use in cleanroon environments and meets air cleanliness class 3 according to ISO 14644-1. The main dimensions of the cleanroom long carriage SBD units are shown below. Further details can be obtained from the 3D CAD files available from Bishop-Wisecarver's technical department or at www.bwc.com.

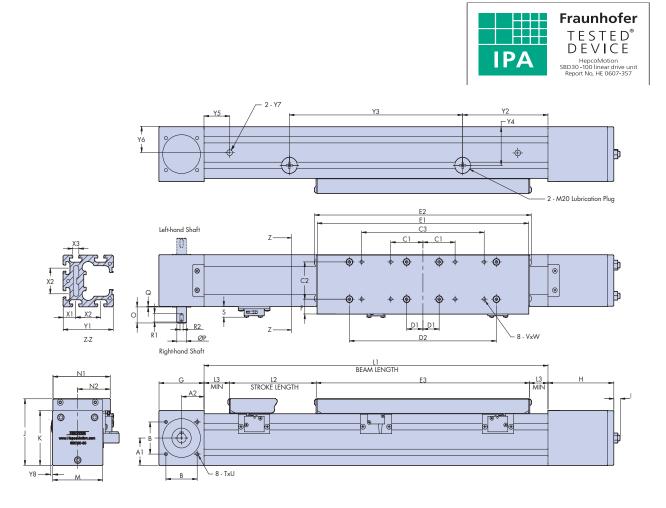


SBD Unit	A1	A2	В	C1	C2	СЗ	DI	D2	E1	E2	E 3	F	G	н	1	J	К	L1 (min)	L2 Nominal Stroke	L3 (min)
SBD20-80	42.4	36	50	51.5	58	196	26	235	338	347	341	23	72	105	12	103.5	85	550	L1 - 390	24.5
SBD30-100	51.6	48	65	65	76	260	46	295	404	413	407	24.5	96	145.5	13	123.5	105	580	L1 - 470	31.5

SBD Unit	M	NI	N2	0	Р	Q	R1	R2	S	TxU	VxW	X1	X2	ХЗ	Y1	Y2	Y3	Y4	Y5	Y6	Y7	Y8
SBD20-80	80	91.5	52	25	15	1	13.5	5	17	M6 x 15	M6 x 9.5	20	40	10	80	162.5	205	60	40	40	1/4" BSPP	2
SBD30-100	100	112	62.5	36	20	1	22	6	17	M6 x 15	M8 x 9.5	30	40	10	100	164	252.5	70	40	50	3/8" BSPP	2

The vacuum extraction connection holes (see dimensions Y5 & Y6) can be repositioned to suit customer requirements or deleted. Bishop-Wisecarver can supply vacuum connections pre-fitted on request.

Technical Data


The nominal load capacities for the SBD long carriage units are based on LBG ball guide dynamic load capacities combined with a mounting factor of 0.8 (see LBG catalog \square 19). They are shown in the table below for each of the 5 direct and moment loading directions. For guidance on load life calculations please refer to the SBD catalog \square 8.

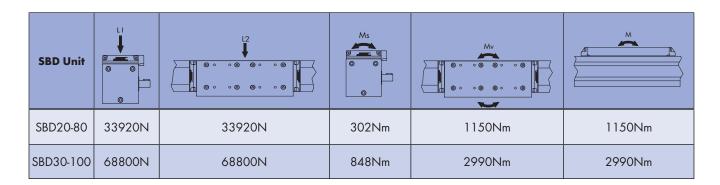

The table below includes the parameters necessary to calculate the performance and duty of an SBD system.


			SBD2	20-80	SBD30	D-100
Parameter			Standard	Cleanroom	Standard	Cleanroom
Mass of carriage	Мс	kg	2.3	2.5	5.2	5.5
Mass of belt per m	Mb	kg/m	0.	12	0.0	34
Mass of SBD unit	Ми	kg	9.7 x L + 6.9	9.7 x L + 7.2	15.7 x L + 13.7	15.7 x L + 14.0
Pulley radius	r	cm	2.3	39	3.	5
Drive efficiency			0.	.9	0.	9
Break away friction	Fba	Z	29	14	46	36
Coefficient of friction	h		0.0	01	0.0)1
Beam moment of inertia*	l _{x-x}	mm ⁴	1500	0000	3700	0000
beam moment of merita	l _{y-y}	111111	1800	0000	4600	0000
Max linear force (belt)	Fmax	N	10	00	330	00
Linear movement per shaft rev		mm	1.5	50	22	.0
Belt tooth pitch		mm		5	10	0
LBG carriage basic load rating (dynamic)	С	N	339	920	688	000

^{*} The beam moment of inertia figure is used in the calculation of beam deflection, with a high figure corresponding to a stiff beam. For further guidance on beam deflection calculations please contact Bishop-Wisecarver.

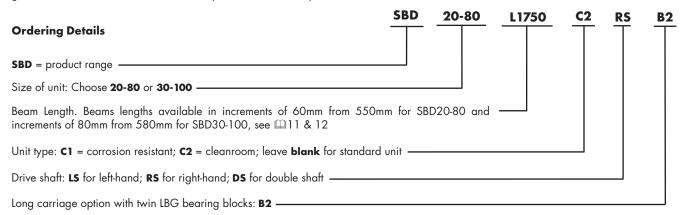

SBD 15-60


The **Hepco**Motion® SBD 15-60 is a new smaller addition to the SBD range of linear actuators. It shares the key features and benefits of the existing SBD range, but using a HepcoMotion LBC15 Linear Ball Guide. Units are supplied in increments of 60mm up to 6000mm in one piece, and unlimited lengths can be achieved with joined beams. The nominal stroke is calculated with the carriage against the internal buffers. In practice a clearance should be provided to allow for overrun. The main dimensions of the standard unit are shown below. Further details can be obtained from Bishop-Wisecarver's technical department.

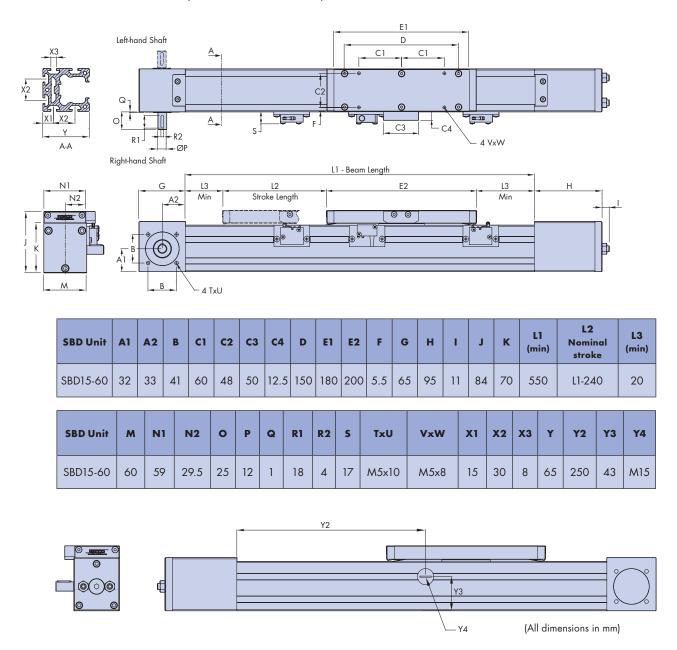

Re-lubrication of the ball guide carriage block is via an access point in the side of the beam (see above), which is closed off with a threaded plug. The lubrication interval depends on the length of stroke, speed and duty. For further details regarding lubrication procedures please contact Bishop-Wisecarver's technical department.


SBD15-60 - Long Carriage Option

The SBD15-60 unit is available with a long carriage version, this option has two LBG bearing blocks in the carriage and has much improved load capacity particularly in the M & Mv directions. The main dimensions of the long carriage units are shown below. Further details can be obtained from Bishop-Wisecarver's technical department.

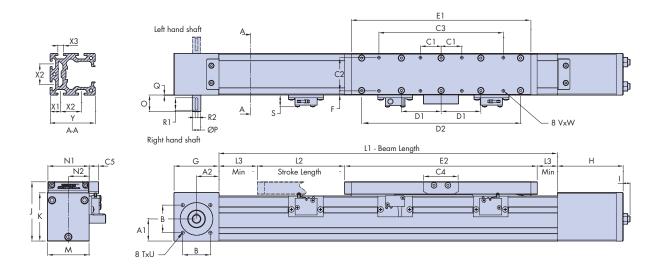

SBD Unit	A1	A2	В	C1	C2	СЗ	C4	C 5	D1	D2	E1	E2	F	G	н	I ~	J	К	L1 (min)		L2 omina troke	al (L3 min)
SBD15-60	32	33	41	30	48	180	50	12.5	57.5	220	250	270	5.5	65	95	11	84	70	550	L	1-310)	20
SBD Unit	М		11	N:	2	0	Р	Q	R1	R2	S	Tx	U	V	ĸW	X	1 2	K2	хз	Y	Υ1	Y2	Y3
SBD15-60	60	5	59	29.	5	25	12	1	18	4	17	M5×	c10	M	5x8	15	5 (30	8	65	250	158	43


(All dimensions in mm)



Re-lubrication of the ball guide carriage blocks is via two access points in the side of the beam (see above), and closed off with a threaded plug. The lubrication interval depends on length of stroke, speed and duty. For further details regarding lubrication procedures please contact Bishop-Wisecarver's technical department.

Technical Information

The nominal load capacities for the SBD (based on LBG ball guide dynamic load capacity) and a typical load corresponding to 10 000km^{*1} travel are included in the table below for each of the 5 direct and moment loading directions *2.

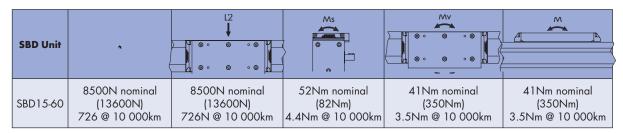

(Figures shown in brackets relate to the long carriage version.)

The table below includes the parameters necessary to calculate the performance and duty of the SBD system.

			SBD15-60	SBD 15-60
Parameter			Standard	Long Carriage
Mass of carriage	Мс	kg	0.8	1.3
Mass of belt per m	Mb	kg/m	0.09	0.09
Mass of SBD unit	Mu	kg	5.5 x L + 2.9	5.5 x L + 3.4
Pulley radius	r	cm	1.91	1.91
Drive efficiency			0.9	0.9
Break away friction	Fba	N	24	28
Coefficient of friction	þ		0.01	0.01
Beam moment of inertia* ³	l _{x-x}	1	560000	560000
beam moment of inertia.	l _{у-у}	mm ⁴	600000	600000
Max linear force (belt)	Fmax	N	700	700
Linear movement per shaft rev		mm	120	120
Belt tooth pitch		mm	5	5
LBG carriage basic load rating (dynamic)	С	N	16500	26400

Ordering Details	SBD	15-60	L1740	C1	RS	B2
SBD = product range					T	T
Size of unit : 15-60						
Beam Length. Beam lengths are available in increments of 60mr	m from 550mm-					
Unit Type: C1 = corrosion resistant; leave blank for standard uni	ts —					
Drive shaft: LS for left-hand; RS for right-hand; DS for double sha	ıft ———					
Long Carriage Option with twin LBG bearing blocks: B2						

- 1. The tabulated load figures above for 10,000km assume a value for variable load factor $f_V = 2$ which is suitable for most applications.
- 2. For load & life calculations please refer to 🕮 8 of the SBD catalog.
- 3. The beam moment of inertia figure is used in the calculation of beam deflection, with a high figure corresponding to a stiff beam. For further guidance on beam deflection calculations please contact Bishop-Wisecarver.

Notes:

www.bwc.com

Notes:

www.bwc.com



Bishop-Wisecarver[®] is proud to be the exclusive North American distributor of HepcoMotion[®] products since 1984.

Components & Accessories

DualVee[®] MadeWell[®]

GV3 SL2

PRT2 HDS2

HDRT MCS

Motor Mounts Gantry Brackets

Wrenches

Manual Linear Guide Systems

DualVee[®] UtiliTrak[®] MinVee[®]

GV3

Simple Select[®]

SL2 HDS2 MHD HTS

Actuated Linear Guide Systems

LoPro®

XLA™

ECO60™

SlickStick™

SteadyRail™

HDLS

HDCS

PDU2

DAPDU2

SBD

PSD

Robot Transfer Units

LoPro[®] RTU DualVee[®] RTU

Custom Solutions

Extruded Profile Guides
Custom Bearings
Custom Subassemblies
Engineering Services

Large Diameter Ring Guides and Track

Rotary Guide Systems

PRT2 DTS2 DTS ALR HDRT 1-Trak GFX

SDM

DLS

BWC.COM

Contact

Web: **BWC.com**Phone: **(925) 439-8272**Email: **Sales@bwc.com**

Corporate Office

Bishop-Wisecarver 2104 Martin Way Pittsburg, CA 94565

Quality Certifications



- Certified Bay Area Green Business
- Certified Evergreen

Women's Business Enterprise



Certified WOSB

Certifications & Compliance

- EN 9100:2018
- JISQ 9100:2016
- ISO 13485 & GMP Compliance
- Responsible Minerals Initiative
- RoHS
- International Traffic in Arms Regulations Compliant